
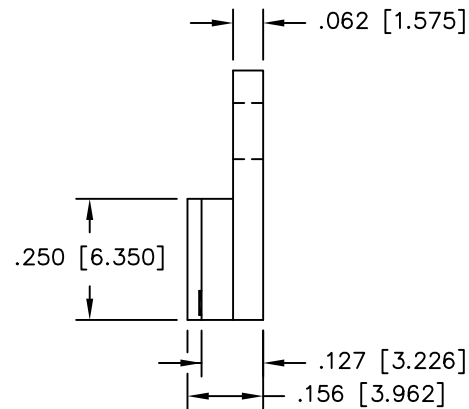


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
3715	A	INITIAL RELEASE	DG	6-12
3756	B	SEE DAR	DG	7-12

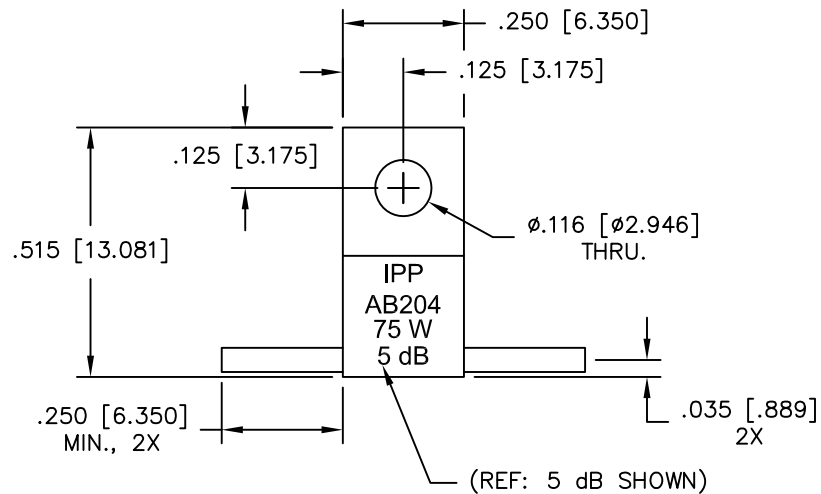


NOTES

- LEAD MATERIAL:
99.99% PURE SILVER,
.050 [1.270] WIDE x .005 [0.127] THICK
- SUBSTRATE MATERIAL: BeO
COVER MATERIAL: Al₂O₃
- FLANGE MATERIAL: COPPER
PLATING: NICKEL

ELECTRICAL SPECIFICATIONS

NOMINAL IMPEDANCE: 50 OHMS
FREQUENCY: DC - 2.5 GHz.
VSWR: 1.25:1
INPUT POWER: 75 WATTS
TEMPERATURE: -55°C TO 150°C

PART NO.	VALUE	TOLERANCE
IPP-AB204-2	2.0 dB	±.50 dB
IPP-AB204-4	4.0 dB	±.50 dB
IPP-AB204-5	5.0 dB	±.50 dB
IPP-AB204-6	6.0 dB	±.50 dB
IPP-AB204-8	8.0 dB	±.75 dB
IPP-AB204-10	10.0 dB	±1.0 dB
IPP-AB204-20	20.0 dB	±1.5 dB

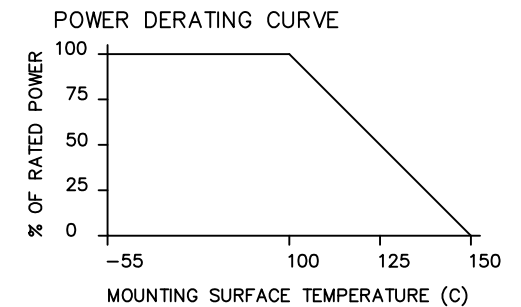

MATERIAL 23	DWN S.Cornell	DATE 6-8-12	Innovative Power Products			
	ENG DG	DATE 6/12				
FINISH 3	MANUF	DATE	TITLE ATTENUATOR, 75 WATT, FLANGE			
	CAGE CODE: 437R2					
TOLERANCE IN [MM] .XX ±.02 [.50] .XXX ±.010 [.254]	SHEET 1	OF 1	SCALE 4:1	SIZE B	P/N IPP-AB204-XX	REV. B