

L2N7002SWT1G

S-L2N7002SWT1G

Small Signal MOSFET

380 mAmps, 60 Volts N-Channel SC-70

1. FEATURES

- We declare that the material of product compliance with RoHS requirements and Halogen Free.
- S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.
- ESD protected
- Low RDS(on)

2. APPLICATIONS



- Low side load switch
- Level shift circuits
- DC-DC converter
- Portable applications i.e. DSC, PDA, Cell Phone, etc.

3. DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
L2N7002SWT1G	701	3000/Tape&Reel
L2N7002SWT3G	701	10000/Tape&Reel

4. MAXIMUM RATINGS(Ta = 25°C)

Parameter	Symbol	Limits	Unit
Drain-Source Voltage	VDSS	60	Vdc
Gate-Source Voltage	VGS	±20	Vdc
Drain Current	ID		mAdc
– Steady State TA = 25°C		320	
TA = 85°C		230	
– t<5s TA = 25°C		380	
TA = 85°C		270	
Pulsed Drain Current (tp=10µs)	IDM	1.5	A
Source Current (Body Diode)	IS	300	mA



5. THERMAL CHARACTERISTICS

Parameter	Symbol	Limits	Unit
Total Device Dissipation(Note 1)	PD		mW
– Steady State		300	
– $t < 5s$		420	
Junction-to-Ambient(Note 1)	R θ JA		°C/W
– Steady State		417	
– $t < 5s$		300	
Lead Temperature for Soldering Purposes (1/8 " from case for 10 s)	TL	260	°C
Junction and Storage temperature	TJ, Tstg	-55~+150	°C
Gate-Source ESD Rating(HBM, Method 3015)	ESD	2000	V

6. ELECTRICAL CHARACTERISTICS (Ta= 25°C)

OFF CHARACTERISTICS

Characteristic	Symbol	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage (VGS = 0, ID = 250 μ Adc)	VBRDSS	60	-	-	Vdc
Drain-to-Source Breakdown Voltage Temperature Coefficient	VBRDSS/TJ	-	71	-	mV/°C
Zero Gate Voltage Drain Current TJ = 25°C (VGS = 0, VDS = 60 Vdc)	IDSS	-	-	1.0	μ Adc
TJ = 125°C		-	-	500	
(VGS = 0, VDS = 50 Vdc) TJ = 25°C		-	-	100	nAdc
Gate-Body Leakage Current, Forward (VGS = 20 Vdc)	IGSSF	-	-	10	μ Adc
Gate-Body Leakage Current, Reverse (VGS = - 20 Vdc)	IGSSR	-	-	-10	μ Adc

ON CHARACTERISTICS (Note 2)

Gate Threshold Voltage (VDS = VGS, ID = 250 μ Adc)	VGS(th)	1.0	-	2.0	Vdc
Negative Threshold Temperature Coefficient	VGS(TH)/TJ	-	4	-	mV/°C
Static Drain-Source On-State Resistance (VGS = 10 Vdc, ID = 500 mAdc)	RDS(on)	-	-	2.8	Ω
(VGS = 4.5 Vdc, ID = 200 mAdc)		-	-	3.2	
Forward Transconductance (VDS = 5.0 Vdc, ID = 200 mAdc)	gfs	80	-	-	mS

DYNAMIC CHARACTERISTICS

Input Capacitance (VDS = 25 Vdc, VGS = 0, f = 1.0 MHz)	Ciss	-	21	-	pF
Output Capacitance (VDS = 25 Vdc, VGS = 0, f = 1.0 MHz)	Coss	-	12	-	pF
Reverse Transfer Capacitance (VDS = 25 Vdc, VGS = 0, f = 1.0 MHz)	Crss	-	0.35	-	pF
Total Gate Charge	VGS = 4.5 V, VDS = 10 V; ID= 500 mA	QG(TOT)	-	0.44	nC
Gate-to-Source Charge		QGS	-	0.2	
Gate-to-Drain Charge		QGD	-	0.1	

1. FR-4 = 1.0×0.75×0.062 in.

2.Pulse Test: Pulse Width $\leq$ 300 μ s, Duty Cycle $\leq$ 2.0%.

6. ELECTRICAL CHARACTERISTICS (Ta= 25°C)(Con.)





SWITCHING CHARACTERISTICS

Turn-On Delay Time	VDS = 30 V, VGEN = 10 V, ID = 500 mA, RG = 25Ω, RL = 60Ω	td(on)	-	2.7	-	ns
Rise Time		tr	-	2.5	-	
Turn-Off Delay Time		td(off)	-	13	-	
Fall Time		tf	-	8	-	





BODY-DRAIN DIODE RATINGS

Diode Forward On-Voltage (IS = 0.5A, VGS = 0 V)	VSD	-	0.85	-	Vdc
--	-----	---	------	---	-----




7. ELECTRICAL CHARACTERISTICS CURVES

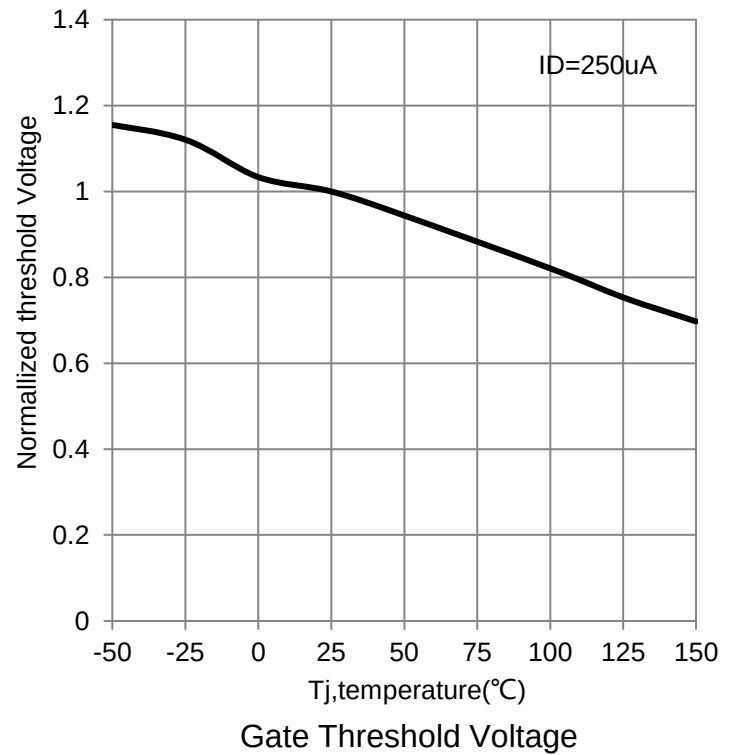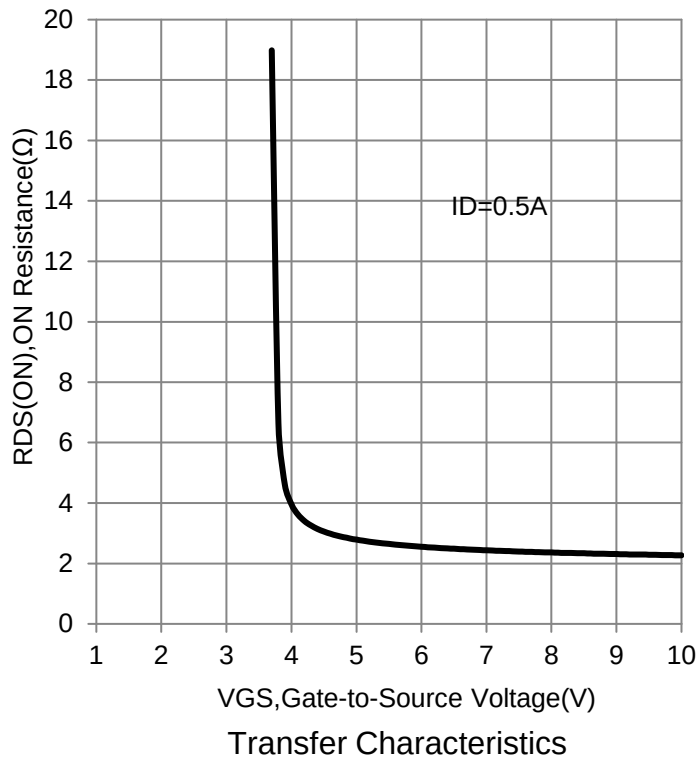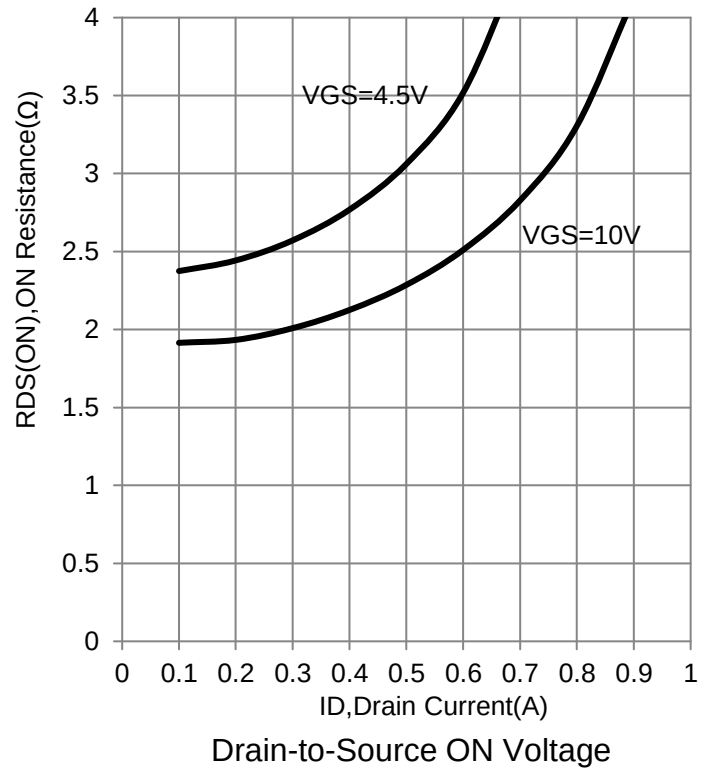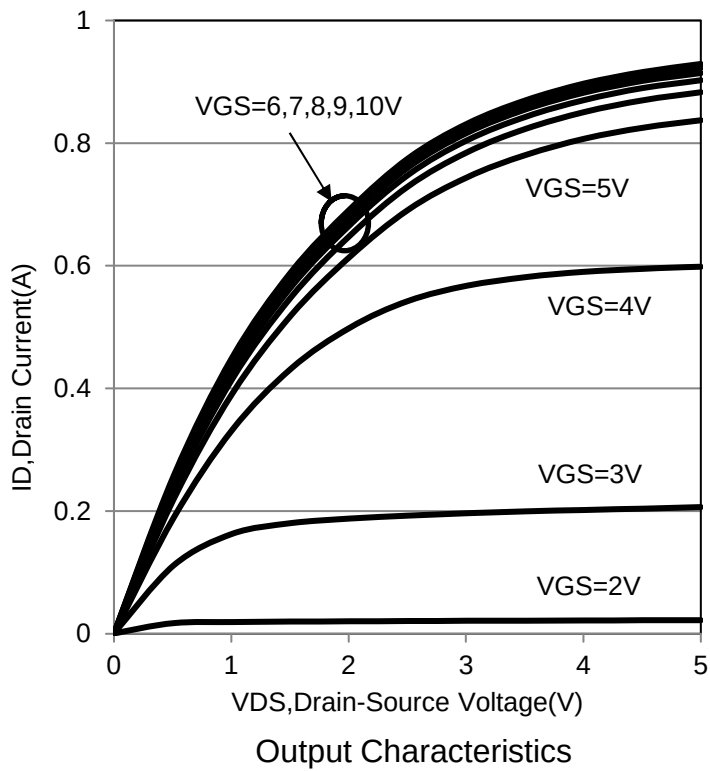

7. ELECTRICAL CHARACTERISTICS CURVES(Con.)

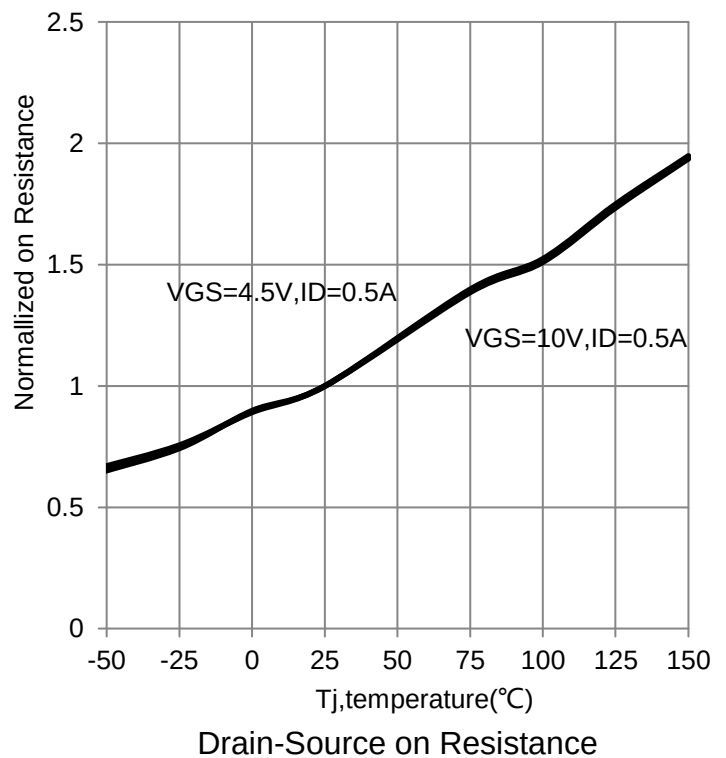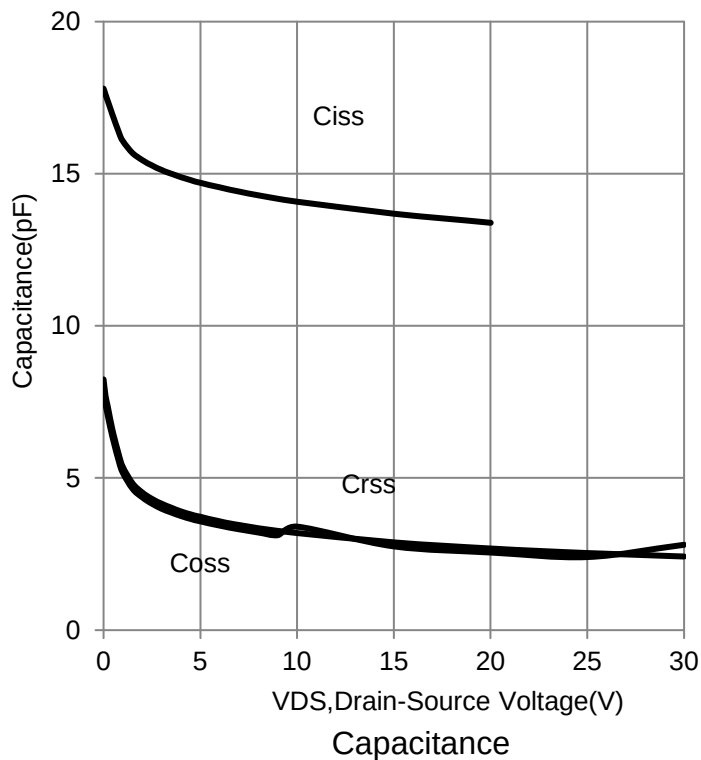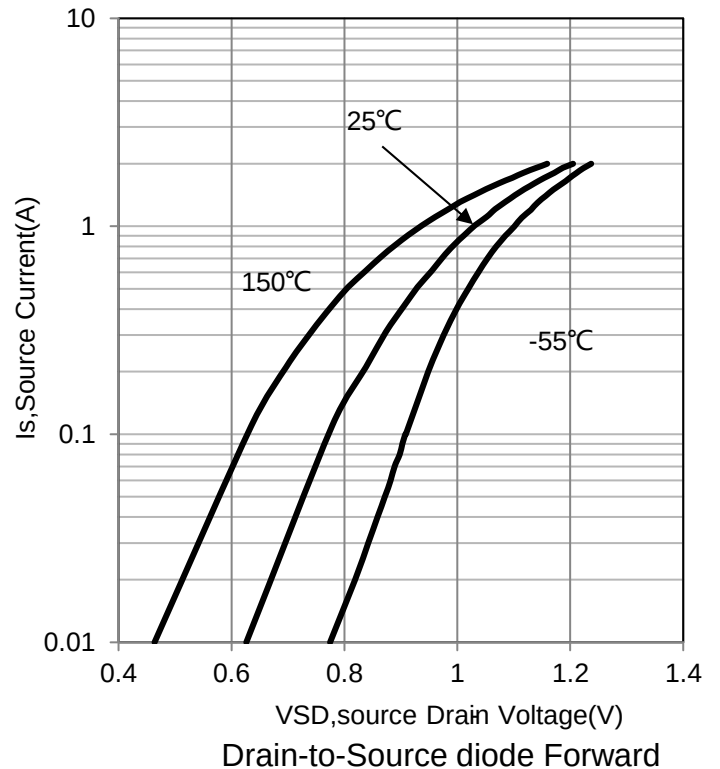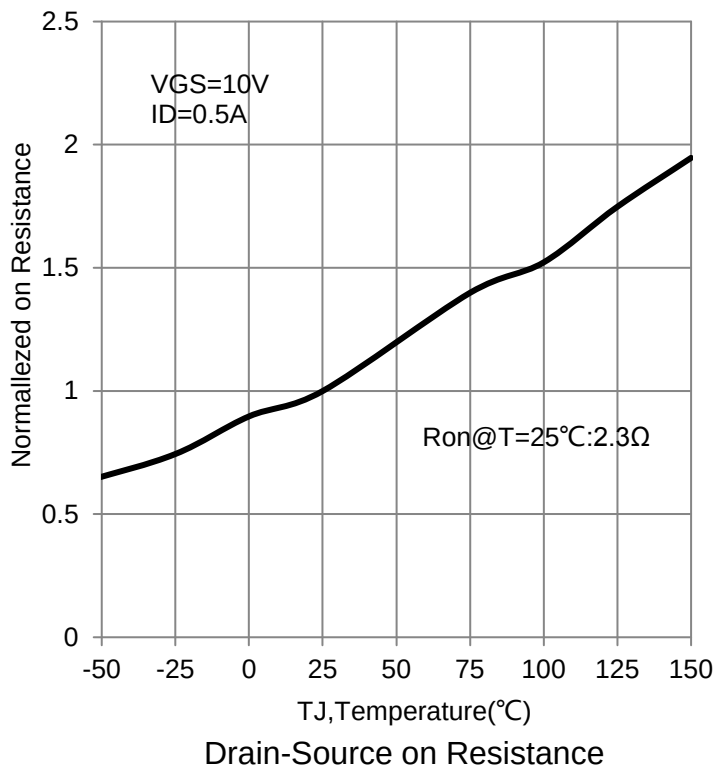


7. ELECTRICAL CHARACTERISTICS CURVES(Con.)

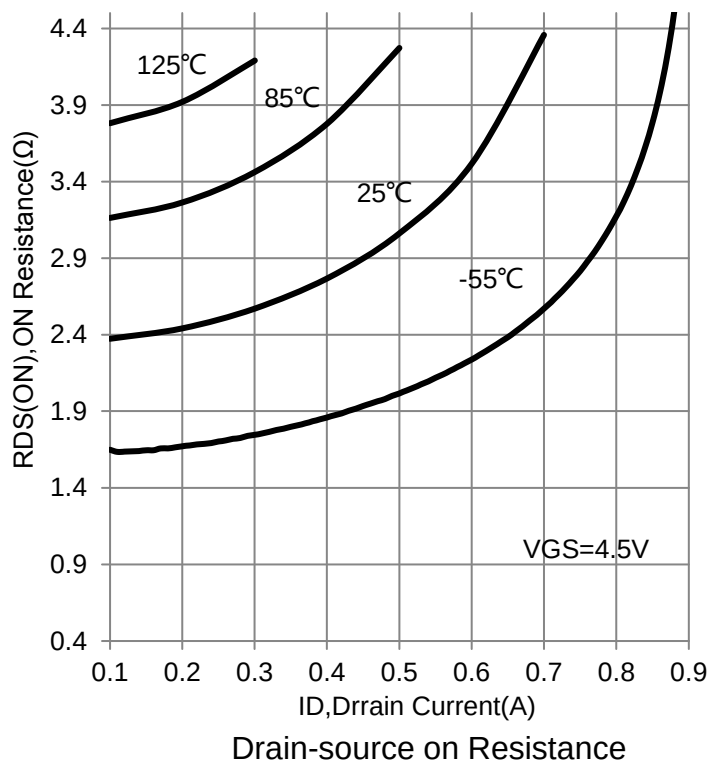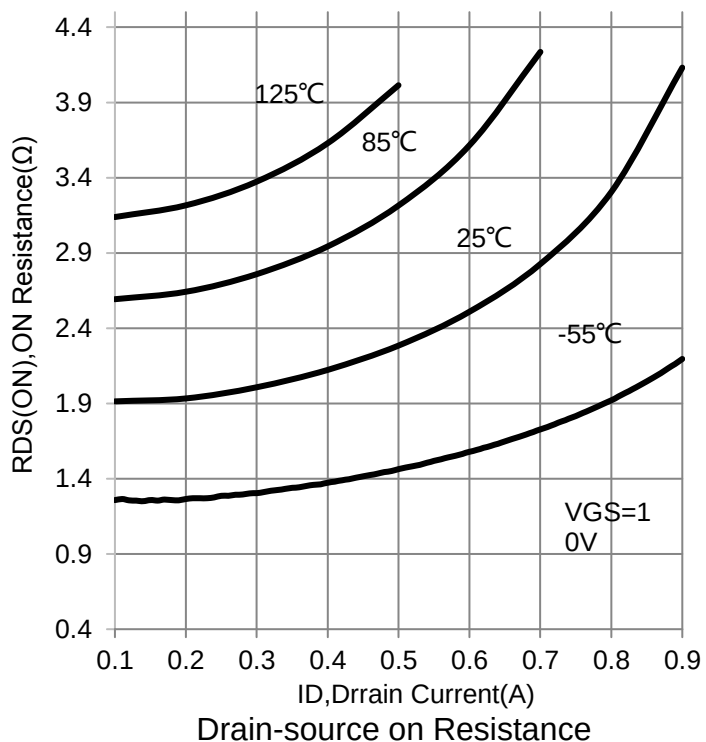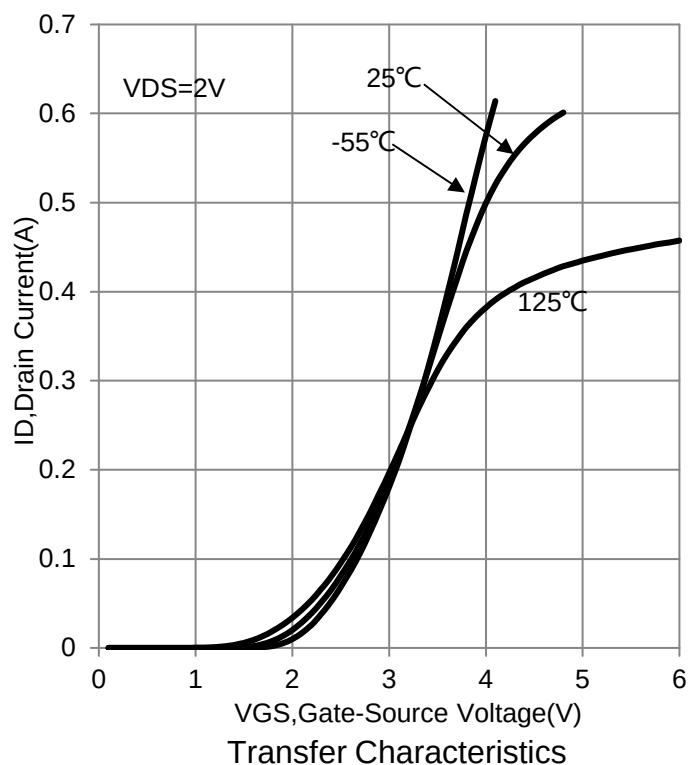

8.OUTLINE AND DIMENSIONS

Notes:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.

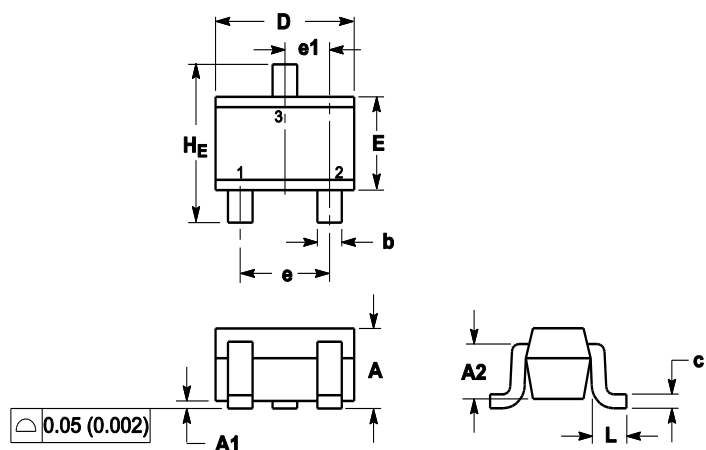

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.90	1.00	0.032	0.035	0.039
A1	0.00	0.05	0.10	0.000	0.002	0.004
A2	0.70REF			0.028REF		
b	0.30	0.35	0.40	0.012	0.014	0.016
c	0.10	0.18	0.25	0.004	0.007	0.010
D	1.80	2.10	2.20	0.071	0.083	0.087
E	1.15	1.24	1.35	0.045	0.049	0.053
e	1.20	1.30	1.40	0.047	0.051	0.055
e1	0.65REF			0.026REF		
L	0.20	0.38	0.56	0.008	0.015	0.022
HE	2.00	2.10	2.40	0.079	0.083	0.095

9.SOLDERING FOOTPRINT

