


W005G THRU W10G

MINIATURE GLASS PASSIVATED SINGLE-PHASE SILICON BRIDGE RECTIFIER
VOLTAGE - 50 to 1000 Volts CURRENT - 1.5 Amperes

FEATURES

- ◆ Glass passivated chip junctions
- ◆ Plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- ◆ High case dielectric strength
- ◆ Typical I_R less than $0.1 \mu A$
- ◆ High overload surge capability
- ◆ Ideal for printed circuit board
- ◆ High temperature soldering guaranteed: 265° C / 10 seconds / .375", (9.5mm) lead length / 5lbs., (2.3 kg) tension

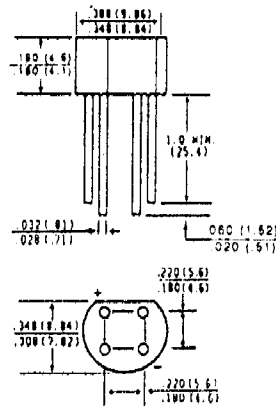

Dimensions in inches
and
(millimeters)

MECHANICAL DATA

Case: Molded plastic

Terminals: Leads solderable per MIL-STD-202, Method 208

Weight: 0.04 ounce, 1.1 grams

Mounting Position: Any

Weight: 0.04 ounce, 1.1 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
60 Hz, resistive or inductive load.

	SYMBOLS	W 005G	W 01G	W 02G	W 04G	W 08G	W 08G	W 10G	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at 375° (9.5mm) lead length at $T_A = 25^\circ C$	$I_{(AV)}$	1.5							Amps
Peak Forward Surge Current Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50.0							Amps
Rating for fusing (1t=8.3ms)	I_t^2	10.0							A ² s
Maximum Instantaneous Forward Voltage Drop per element at 1.0 Amperes	V_f	1.0							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage per Bridge Element	I_R	5.0							μA
Typical Junction Capacitance per element	C_J	14.0							pf
Typical Thermal Resistance	$R_{\theta JA}$	36.0							°C/W
Operating Temperature Range	T_A	-55 to +150			-55 to +125				°C
Storage Temperature Range	T_{STG}	-55 to +150							°C



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors