



Data Sheet



Product Category: Filters

Series Number	Package	Description	Last Modified
751 ~ 752	Ceramic XT	Trap For TV / VCR	Jan. 01 2007

Filter FEATURES

- Wide bandwidth Ceramic Trap
- Low insertion loss
- Excellent spurious suppression characteristics
- TV SIF stage use
- RoHS Compliant



OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS / PART NUMBER GUIDE

PART NO.	Type	Fig.	Frequency (fn1)	Attenuation (at fn1)	Attenuation BW (fn1)
			MHz	dB min.	KHz min.
751-0035	XT/J	1	3.580	20	20 @ 20dB Att BW
751-0044	XT/J	1	4.430	20	40 @ 20dB Att BW
751-0045	XT/J	1	4.500	20	40 @ 20dB Att BW
751-0055	XT/J	1	5.500	20	40 @ 20dB Att BW
751-0057	XT/J	1	5.742	20	40 @ 20dB Att BW
751-0060	XT/J	1	6.000	20	40 @ 20dB Att BW
751-0065	XT/J	1	6.500	20	40 @ 20dB Att BW
752-0035	XT/B	2	3.580	25	40 @ 25dB Att BW
752-0044	XT/B	2	4.430	30	50 @ 30dB Att BW
752-0045	XT/B	2	4.500	35	70 @ 30dB Att BW
752-0055	XT/B	2	5.500	35	90 @ 30dB Att BW
752-0057	XT/B	2	5.742	35	90 @ 30dB Att BW
752-0060	XT/B	2	6.000	35	90 @ 30dB Att BW
752-0065	XT/B	2	6.500	35	90 @ 30dB Att BW

REFERENCE: The level at 1MHz shall be made for a reference (0dB)

NOTE: Deviations on all parameters available. Please consult Oscilent for details.

DEFINITIONS: Click on the characteristic names above, for definitions of the particular characteristic.

PACKAGE DIMENSIONS (mm)

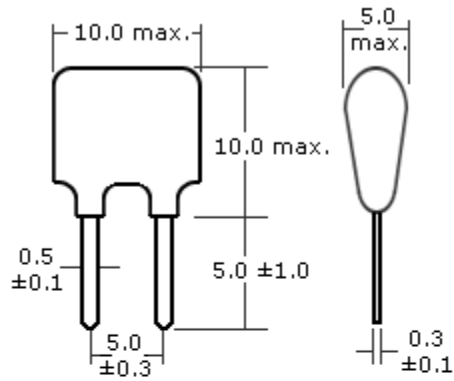


Figure 1



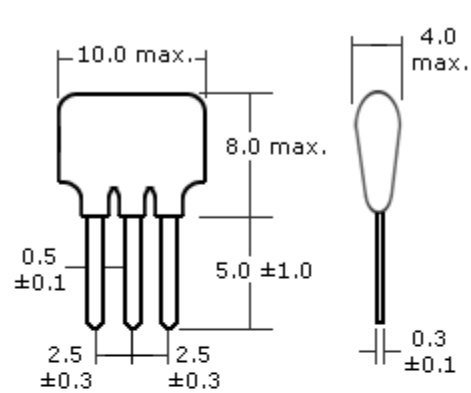


Figure 2

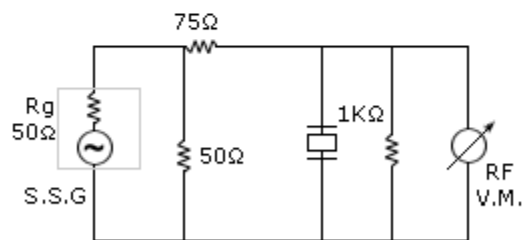

Test Circuit

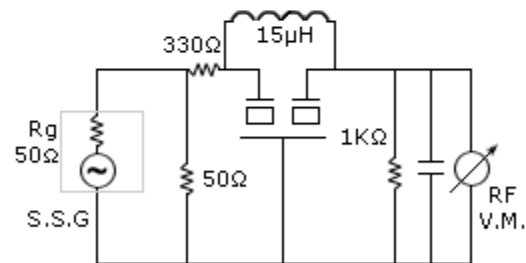

Test Circuit

Oscilent Corporation - CALL **949.252.0522**
 18195 East McDermott Street . Building D . Irvine . CA 92614 . USA
 Fax: 949.252.0599 . E-Mail: Sales@Oscilent.com

Series No.: 751 to 752