
isc N-Channel MOSFET Transistor TK13A60W

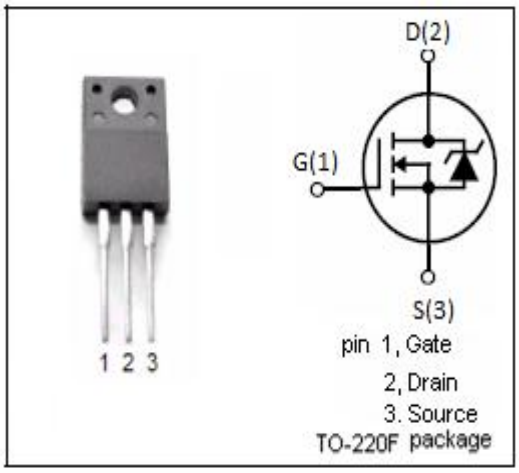


• FEATURES

- With TO-220F packaging
- High speed switching
- Low gate input resistance
- Standard level gate drive
- Easy to use
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• APPLICATIONS

- Power supply
- Switching applications

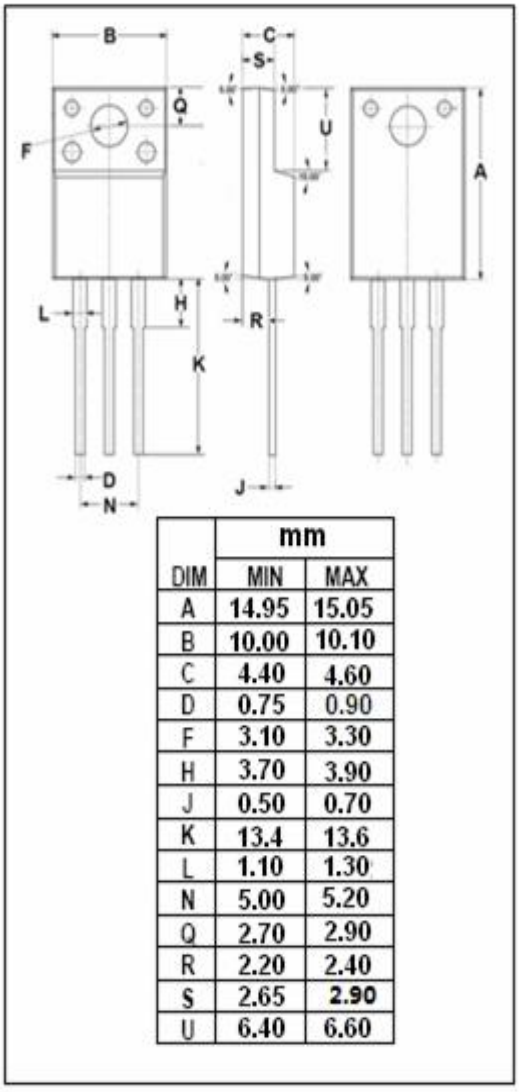

DIM	mm MIN	mm MAX
A	14.95	15.05
B	10.00	10.10
C	4.40	4.60
D	0.75	0.90
F	3.10	3.30
H	3.70	3.90
J	0.50	0.70
K	13.4	13.6
L	1.10	1.30
N	5.00	5.20
Q	2.70	2.90
R	2.20	2.40
S	2.65	2.90
U	6.40	6.60

• ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	600	V
V_{GSS}	Gate-Source Voltage	±30	V
I_D	Drain Current-Continuous	13	A
I_{DM}	Drain Current-Single Pulsed	52	A
P_D	Total Dissipation	50	W
T_j	Operating Junction Temperature	150	℃
T_{stg}	Storage Temperature	-55~150	℃

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
Rth(ch-c)	Channel-to-case thermal resistance	2.5	℃/W
Rth(ch-a)	Channel-to-ambient thermal resistance	62.5	℃/W

Download from alldatasheet.com

isc N-Channel MOSFET Transistor TK13A60W

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V; I_D= 10mA	600			V
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}; I_D=1mA	2.0		4.0	V
$R_{DS(on)}$	Drain-Source On-Resistance	V_{GS}= 10V; I_D=6.5A			430	mΩ
I_{GSS}	Gate-Source Leakage Current	V_{GS}=±30V;V_{DS}= 0V			±1	μA
I_{DSS}	Drain-Source Leakage Current	V_{DS}= 600V; V_{GS}= 0V			10	μA
V_{SDF}	Diode forward voltage	I_{SD}=13A, V_{GS} = 0 V			1.7	V

Download from alldatasheet.com