



ETA-USA

The Power Professionals

AOPS600

600W Power Supply



FEATURES

- Wide Input voltage range
- Over voltage protection
- Overcurrent protection
- Built in PFC
- Remote ON/OFF
- Power Fail Signal
- 2 Yr warranty



MODEL/CHANNEL		Unit	AOPS600-3.3	AOPS600-5	AOPS600-9	AOPS600-12
OUTPUT	Normal Voltage	V	3.3	5	9	12
	Setting Voltage Range	V	3.26~3.33	4.95~5.05	8.91~9.09	11.88~12.12
	Current	A	100	100	66.5	50
	Peak Current	A	120	120	66.5	50
	Line Regulations	mV	25	25	45	60
	Load Regulations	mV	50	50	90	120
	Temperature Drift	mV	75	75	135	180
	Ripple Max.	mV	80	80	120	120
	Ripple & Noise Max.	mV	120	120	150	150
	Efficiency 110V Typ. 220V	%	69 71	74 77	76 79	78 81
MODEL/CHANNEL		Unit	AOPS600-15	AOPS600-24	AOPS600-28	AOPS600-48
OUTPUT	Normal Voltage	V	15	24	28	48
	Setting Voltage Range	V	14.85~15.15	23.76~24.24	27.72~28.28	47.52~48.48
	Current	A	40	25	21	12.5
	Line Regulations	mV	75	120	140	240
	Load Regulations	mV	150	240	280	480
	Temperature Drift	mV	225	360	420	720
	Ripple Max.	mV	120	120	120	150
	Ripple & Noise Max.	mV	150	150	150	250
	Efficiency 110V Typ. 220V	%	79 83	81 84	81 84	82 85
	Turn-on Time max	ms	1000(ACIN110/220V, Io-100%)			
	Hold-up Time Typ.	ms	20(ACIN110/220V, Io-100%)			



ETA-USA

16170 Vineyard Blvd. Suite 180 Morgan Hill, CA 95037 <http://www.eta-usa.com>
Toll-free (US only): 800-ETA-POWR (800-382-7697) Telephone: 408 778-2793 FAX: 408-779-2753



AOPS600


600W Power Supply

MODEL/CHANNEL			Unit	AOPS600-3.3	AOPS600-5	AOPS600-9	AOPS600-12
INPUT	Current	110V	A	4.3	6.6	7.2	
		220V		2.2	3.3	3.6	
	Power factor Typ.	110V	-	0.98	0.98	0.99	
		220V		0.92	0.93	0.95	
MODEL/CHANNEL			Unit	AOPS600-15	AOPS600-24	AOPS600-28	AOPS600-48
INPUT	Current	110V	A	7.2			
		220V		3.6			
	Power factor Typ.	110V	-	0.99			
		220V		0.95			
	Voltage, Frequency		V	AC100-240V(AC85-264V).50/60Hz(47-63)			
	Inrush Current Typ.	110V	A	20 (Ta=25°C, ColdStart)			
		220V		40 (Ta=25°C, ColdStart)			
	Leakage Current Max.	110V	mA	0.5(Typ.)			
220V		1(Typ)					
FUNCTION	Over Voltage Protection		V	Works at 115~140% of rating			
	Over Current Protection		A	Works at over 110% of rating and recovers automatically			
	Parallel/Series Operation		-	Possible/ Possible			
	Cooling / O.T.P		-	Forced air by blower fan/Possible			
ELECTRICAL ISOLATION	(1) Input - Output		-	AC 3 KV 1 min, cut-off: 20 mA/DC 500V 100MΩ			
	(2) Input - F.G		-	AC 2 KV 1 min, Cut-off: 20 mA/DC 500V 100MΩ			
	(3) Output - F.G		-	AC 0.5 KV 1 min, Cut-off: 100mA/DC 500V 100 MΩ			
Environment	Operating temp. & Humidity		-	-10~65°C 20~90% RH (Non Condensing)			
	Storage temp. & Humidity		-	-20~75°C 20~90% RH (Non Condensing)			
	Vibration		-	10~55 Hz at 2G 3 minutes period, 30 minutes along X. Y and Z axis			
	Safety		-	Complied with EN60950-1			
	Conducted Emission		-	Complied with EN55022-B			
	PFHC		-	Complied with IEC61000-3-2			
Dimension	Size(LxWxH)/Weight		mm/g	190x92x120/2000			






Block Diagram

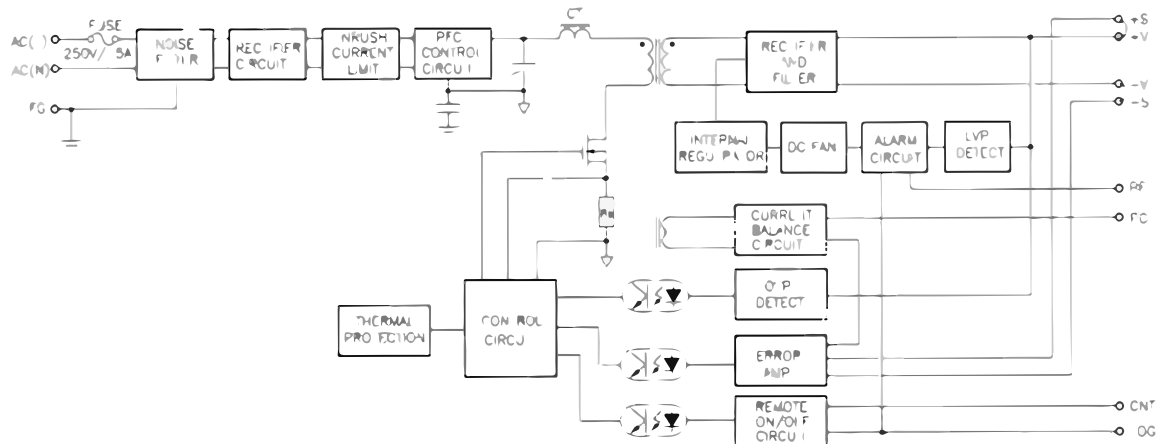

Derating Curve

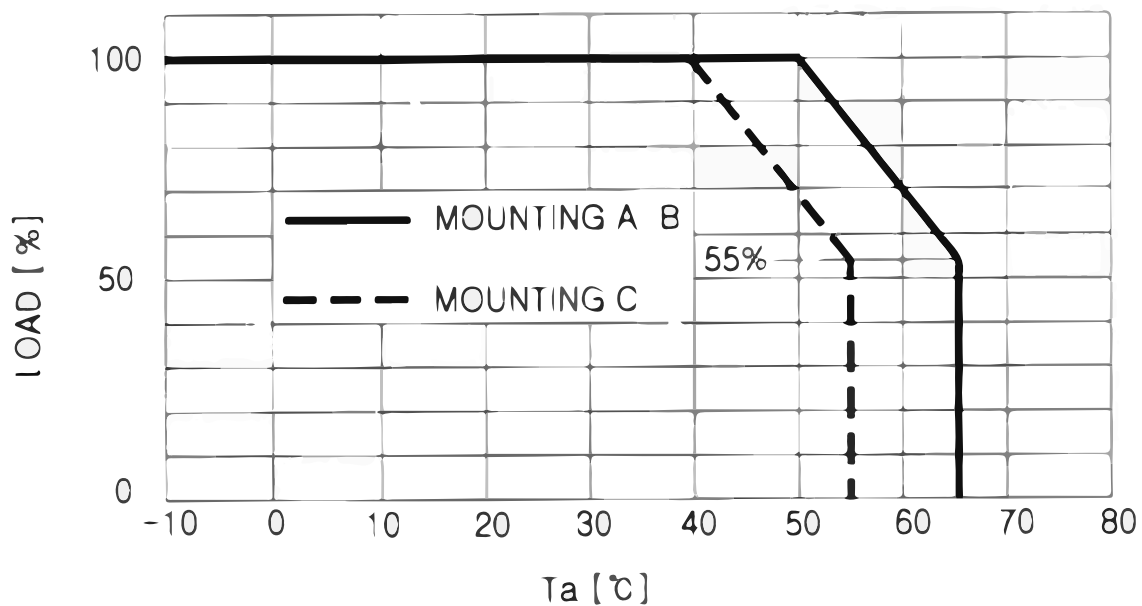





ETA-USA
The Power Professionals

Mounting/Installation


(A) Standard
Mounting




(B)





(C)



(D) Inhibit



(E) Inhibit

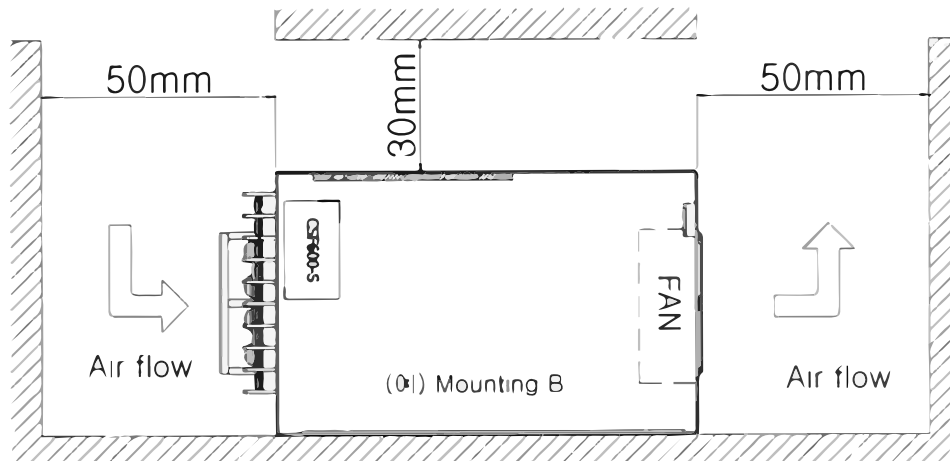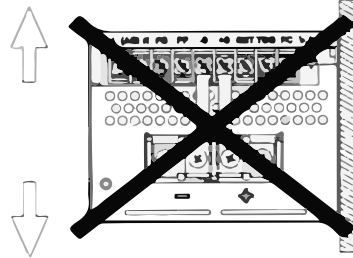


ETA-USA

16170 Vineyard Blvd. Suite 180 Morgan Hill, CA 95037 <http://www.eta-usa.com>
Toll-free (US only): 800-ETA-POWR (800-382-7697) Telephone: 408 778-2793 FAX: 408-779-2753



Terminal Connection

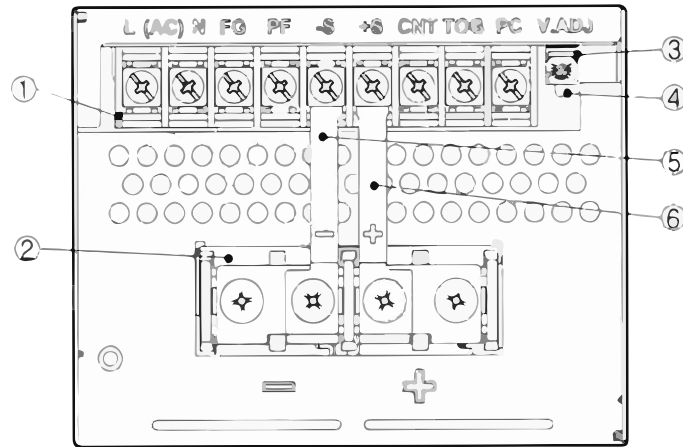

① TB1 Terminal Block (Screw M3 5X8)


Mark	Pin Connection	Function
L	AC Live line	AC Terminal (Fuse in line)
N	AC Neutral line	AC Terminal
FG	Frame ground	AC CASE
PF	Power fail signal	Power fail signal Terminal
-S	(-) Remote sensing	DC (-) Remote sensing terminal
+S	(+) Remote sensing	DC (+) Remote sensing terminal
CNT	Remote ON/OFF (+)	Remote ON/OFF (+) control terminal
TOG	CNT PF ground	CNT PF signal ground terminal
PC	Current balance	SMPS Current balance terminal





ETA-USA
The Power Professionals

Mechanical Drawings

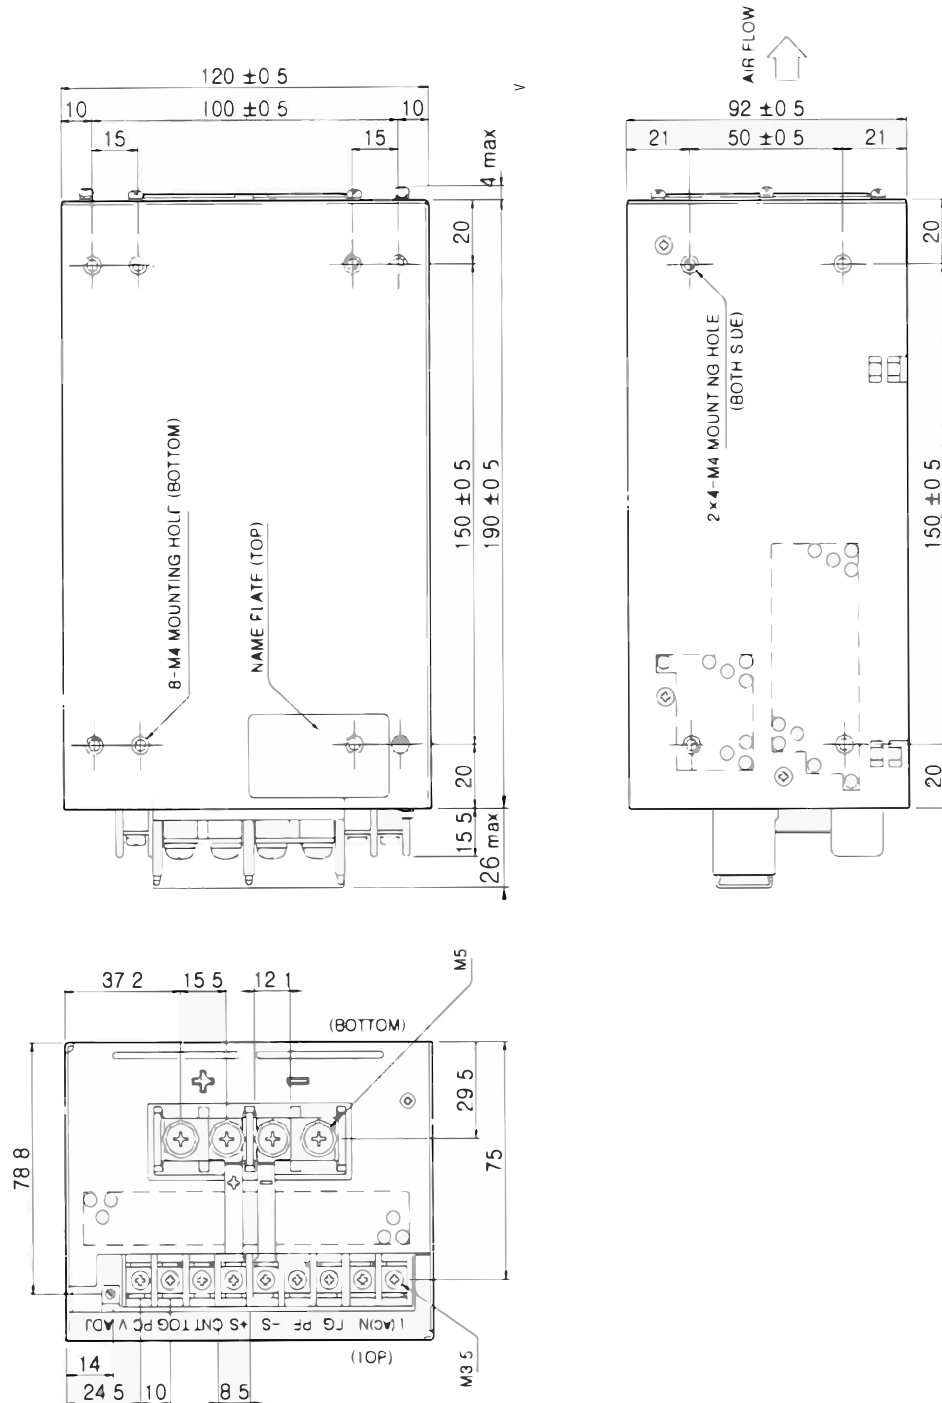

ETA-USA

16170 Vineyard Blvd. Suite 180 Morgan Hill, CA 95037 <http://www.eta-usa.com>
Toll-free (US only): 800-ETA-POWR (800-382-7697) Telephone: 408 778-2793 FAX: 408-779-2753