

# BZX584C2V4~BZX584C75

## SURFACE MOUNT SILICON ZENER DIODES

**VOLTAGE** 2.4 to 75 Volts **POWER** 200 mWatts

### FEATURES


- Planar Die construction
- 200mW Power Dissipation
- Zener Voltages from 2.4~75V
- Ideally Suited for Automated Assembly Processes
- Component are in compliance with EU RoHS 2002/95/EC directives

### MECHANICAL DATA

- Case: SOD-523, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Standard packaging : 8mm tape
- Weight : approximately 0.002

SOD-523

Unit: inch ( mm )



### MAXIMUM RATINGS

| Parameter                                             | Symbol | Value       | Units            |
|-------------------------------------------------------|--------|-------------|------------------|
| Power Dissipation @ $T_A = 25^\circ\text{C}$ (Note A) | $P_D$  | 200         | mW               |
| Operating Junction and Storage Temperature Range      | $T_J$  | -55 to +150 | $^\circ\text{C}$ |

#### NOTES:

A. Mounted on 5.0mm<sup>2</sup>(.013mm thick) land areas.



# BZX584C2V4~BZX584C75

## ELECTRICAL CHARACTERISTICS

| Part Number | Nominal Zener Voltage            |        |        | Max. Zener Impedance              |     |                                   |      | Max Reverse Leakage Current     |       | Marking Code | Package |
|-------------|----------------------------------|--------|--------|-----------------------------------|-----|-----------------------------------|------|---------------------------------|-------|--------------|---------|
|             | V <sub>Z</sub> @ I <sub>ZT</sub> |        |        | Z <sub>ZT</sub> @ I <sub>ZT</sub> |     | Z <sub>ZK</sub> @ I <sub>ZK</sub> |      | I <sub>R</sub> @ V <sub>R</sub> |       |              |         |
|             | Nom. V                           | Min. V | Max. V | Ω                                 | mA  | Ω                                 | mA   | uA                              | V     |              |         |
| BZX584C2V4  | 2.4                              | 2.28   | 2.52   | 100                               | 5.0 | 600                               | 1.00 | 50                              | 1.0   | W1           | SOD-523 |
| BZX584C2V7  | 2.7                              | 2.57   | 2.84   | 100                               | 5.0 | 600                               | 1.00 | 20                              | 1.0   | W2           | SOD-523 |
| BZX584C3V0  | 3                                | 2.85   | 3.15   | 95                                | 5.0 | 600                               | 1.00 | 10                              | 1.0   | W3           | SOD-523 |
| BZX584C3V3  | 3.3                              | 3.14   | 3.47   | 95                                | 5.0 | 600                               | 1.00 | 5.0                             | 1.0   | W4           | SOD-523 |
| BZX584C3V6  | 3.6                              | 3.42   | 3.78   | 90                                | 5.0 | 600                               | 1.00 | 5.0                             | 1.0   | W5           | SOD-523 |
| BZX584C3V9  | 3.9                              | 3.71   | 4.10   | 90                                | 5.0 | 600                               | 1.00 | 3.0                             | 1.0   | W6           | SOD-523 |
| BZX584C4V3  | 4.3                              | 4.09   | 4.52   | 90                                | 5.0 | 600                               | 1.00 | 3.0                             | 1.0   | W7           | SOD-523 |
| BZX584C4V7  | 4.7                              | 4.47   | 4.94   | 80                                | 5.0 | 500                               | 1.00 | 3.0                             | 2.0   | W8           | SOD-523 |
| BZX584C5V1  | 5.1                              | 4.85   | 5.36   | 60                                | 5.0 | 480                               | 1.00 | 2.0                             | 2.0   | W9           | SOD-523 |
| BZX584C5V6  | 5.6                              | 5.32   | 5.88   | 40                                | 5.0 | 400                               | 1.00 | 1.0                             | 2.0   | WA           | SOD-523 |
| BZX584C6V2  | 6.2                              | 5.89   | 6.51   | 10                                | 5.0 | 150                               | 1.00 | 3.0                             | 4.0   | WB           | SOD-523 |
| BZX584C6V8  | 6.8                              | 6.46   | 7.14   | 15                                | 5.0 | 80                                | 1.00 | 2.0                             | 4.0   | WC           | SOD-523 |
| BZX584C7V5  | 7.5                              | 7.13   | 7.88   | 15                                | 5.0 | 80                                | 1.00 | 1.0                             | 5.0   | WD           | SOD-523 |
| BZX584C8V2  | 8.2                              | 7.79   | 8.61   | 15                                | 5.0 | 80                                | 1.00 | 0.7                             | 5.0   | WE           | SOD-523 |
| BZX584C9V1  | 9.1                              | 8.65   | 9.56   | 15                                | 5.0 | 100                               | 1.00 | 0.5                             | 6.0   | WF           | SOD-523 |
| BZX584C10   | 10                               | 9.50   | 10.50  | 20                                | 5.0 | 150                               | 1.00 | 0.2                             | 7.0   | WG           | SOD-523 |
| BZX584C11   | 11                               | 10.45  | 11.55  | 20                                | 5.0 | 150                               | 1.00 | 0.1                             | 8.0   | WH           | SOD-523 |
| BZX584C12   | 12                               | 11.40  | 12.60  | 25                                | 5.0 | 150                               | 1.00 | 0.1                             | 8.0   | WI           | SOD-523 |
| BZX584C13   | 13                               | 12.35  | 13.65  | 30                                | 5.0 | 170                               | 1.00 | 0.1                             | 8.0   | WK           | SOD-523 |
| BZX584C14   | 14                               | 13.30  | 14.70  | 30                                | 5.0 | 170                               | 1.00 | 0.1                             | 10.00 | WJ           | SOD-523 |
| BZX584C15   | 15                               | 14.25  | 15.75  | 30                                | 5.0 | 200                               | 1.00 | 0.1                             | 10.50 | WL           | SOD-523 |
| BZX584C16   | 16                               | 15.20  | 16.80  | 40                                | 5.0 | 200                               | 1.00 | 0.1                             | 11.20 | WM           | SOD-523 |
| BZX584C17   | 17                               | 16.15  | 17.85  | 40                                | 5.0 | 200                               | 1.00 | 0.1                             | 12.20 | 17C          | SOD-523 |
| BZX584C18   | 18                               | 17.10  | 18.90  | 45                                | 5.0 | 225                               | 1.00 | 0.1                             | 12.60 | WN           | SOD-523 |
| BZX584C20   | 20                               | 19.00  | 21.00  | 55                                | 5.0 | 225                               | 1.00 | 0.1                             | 14.00 | WO           | SOD-523 |
| BZX584C22   | 22                               | 20.90  | 23.10  | 55                                | 5.0 | 250                               | 1.00 | 0.1                             | 15.40 | WP           | SOD-523 |
| BZX584C24   | 24                               | 22.80  | 25.20  | 70                                | 5.0 | 250                               | 1.00 | 0.1                             | 16.80 | WR           | SOD-523 |
| BZX584C27   | 27                               | 25.65  | 28.35  | 80                                | 5.0 | 300                               | 1.00 | 0.1                             | 18.90 | WS           | SOD-523 |
| BZX584C28   | 28                               | 26.60  | 29.40  | 80                                | 5.0 | 300                               | 1.00 | 0.1                             | 20.50 | 28C          | SOD-523 |
| BZX584C30   | 30                               | 28.50  | 31.50  | 80                                | 5.0 | 300                               | 1.00 | 0.1                             | 21.00 | WT           | SOD-523 |
| BZX584C33   | 33                               | 31.35  | 34.65  | 80                                | 5.0 | 325                               | 1.00 | 0.1                             | 23.10 | WU           | SOD-523 |
| BZX584C36   | 36                               | 34.20  | 37.80  | 90                                | 5.0 | 350                               | 1.00 | 0.1                             | 25.20 | WW           | SOD-523 |
| BZX584C39   | 39                               | 37.05  | 40.95  | 130                               | 5.0 | 350                               | 1.00 | 0.1                             | 27.30 | WX           | SOD-523 |
| BZX584C43   | 43                               | 40.85  | 45.15  | 150                               | 5.0 | 375                               | 1.00 | 0.1                             | 30.10 | WY           | SOD-523 |
| BZX584C47   | 47                               | 44.65  | 49.35  | 170                               | 5.0 | 375                               | 1.00 | 0.1                             | 32.90 | WZ           | SOD-523 |
| BZX584C51   | 51                               | 48.45  | 53.55  | 100                               | 5.0 | 400                               | 1.00 | 0.1                             | 38.00 | XA           | SOD-523 |
| BZX584C56   | 56                               | 53.20  | 58.80  | 135                               | 2.5 | 1000                              | 1.00 | 0.1                             | 42.00 | X2           | SOD-523 |
| BZX584C62   | 62                               | 58.90  | 65.10  | 150                               | 2.5 | 1000                              | 1.00 | 0.1                             | 46.00 | X3           | SOD-523 |
| BZX584C68   | 68                               | 64.60  | 71.40  | 200                               | 2.5 | 1000                              | 1.00 | 0.1                             | 51.00 | X4           | SOD-523 |
| BZX584C75   | 75                               | 71.25  | 78.75  | 250                               | 2.5 | 1000                              | 1.00 | 0.1                             | 56.00 | X5           | SOD-523 |

## BZX584C2V4~BZX584C75

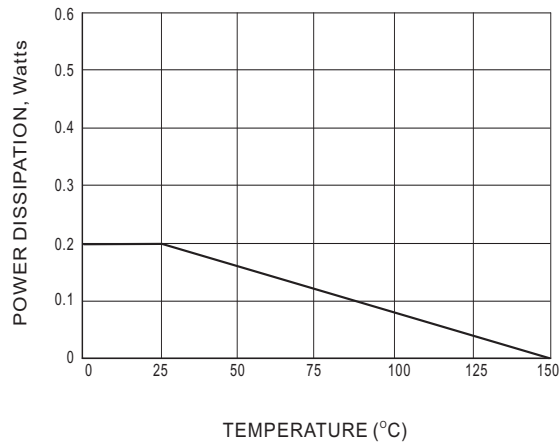


Fig.1 STEADY STATE POWER DERATING

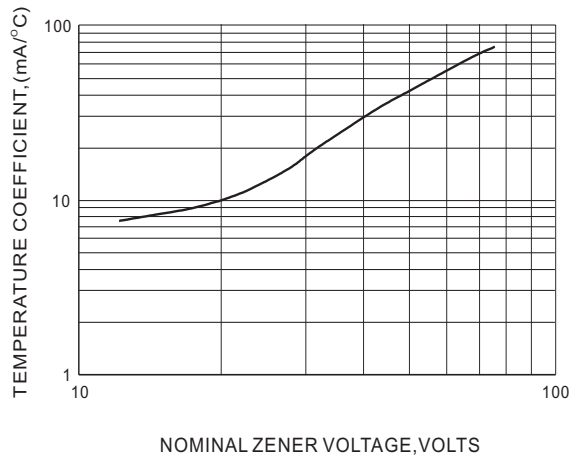


Fig.2 TEMPERATURE COEFFICIENTS

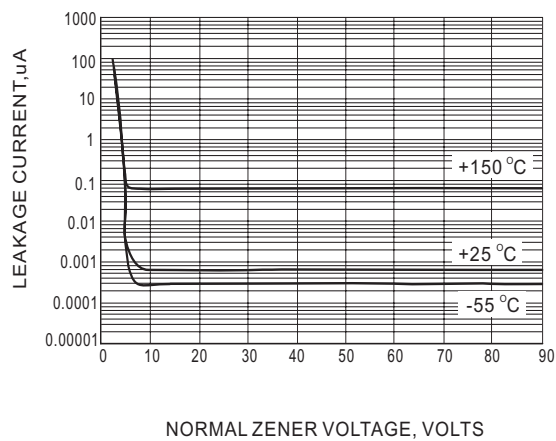


Fig.3 TYPICAL LEAKAGE CURRENT


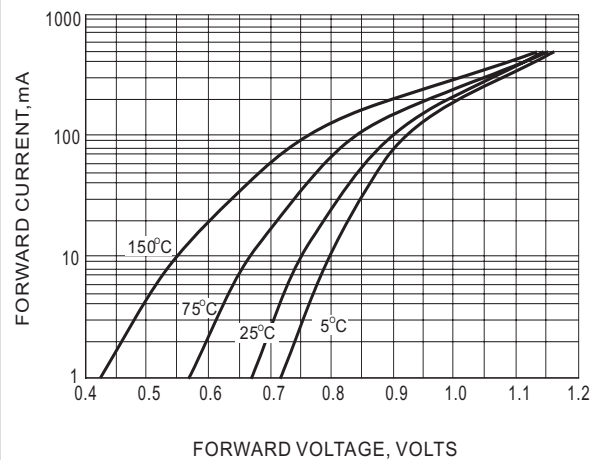


Fig.4 TYPICAL FORWARD VOLTAGE

# BZX584C2V4~BZX584C75

## MOUNTING PAD LAYOUT

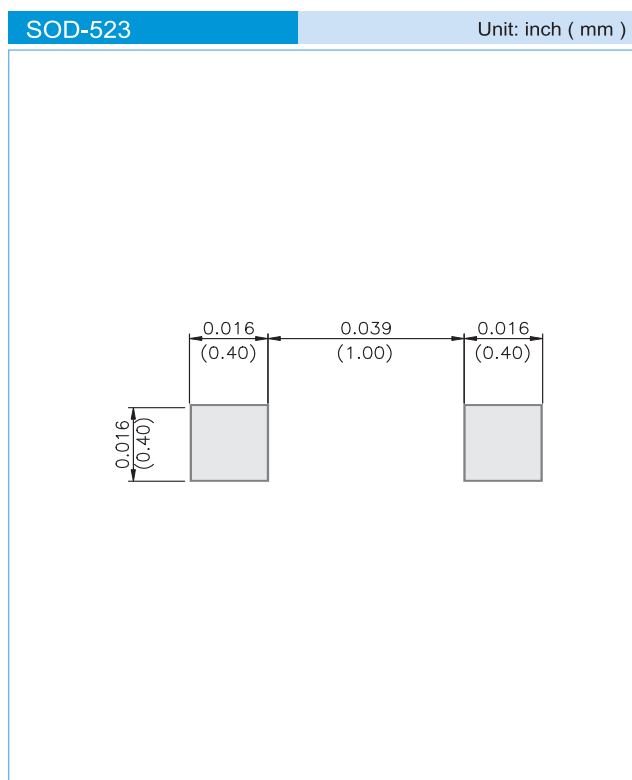

## ORDER INFORMATION

- Packing information
  - T/R - 12K per 13" plastic Reel
  - T/R - 5K per 7" plastic Reel

## LEGAL STATEMENT

### Copyright PanJit International, Inc 2009

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.