
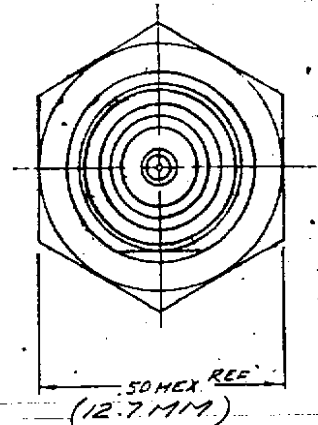


NOTES:

4. SAME AS M39012/21-0002, KC-79-106 EXCEPT FOR FINISH.

UNLESS OTHERWISE SPECIFIED:
 1. TOLERANCES: FRACTIONS ± .010 DECIMALS ± .004 ANGLES ± 0° 30' T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED THE SUM OF THEIR TOLERANCES.
 2. REMOVE ALL BURNS. BREAK SHARP EDGES .003 MAX.
 3. NO FILLETS PERMITTED.
 4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
 5. ALL DIMENSIONS PRIOR TO PLATING.



S-D

KC-79-131

REVISIONS	
ISSUE	CHANGES
0	ER 3072 C.C. 7 DEC 70
1	CN 12479 A JL 28 JUL 75
2	CN 14568 C GA 24 JUN 75
3	CN 19252 C GMF 17 FEB 80
4	CN 21551 C KOR 21 JAN 81

S-D

S-D

ITEM	REQ'D	DESCRIPTION	DWG. NO.
7	1	BNC CONTACT ASSEMBLY	
6	1	HEX NUT	708-4-MOG
5	1	LOCKWASHER	C-71-09-7-MOG
2	1	INSULATOR	
1	1	BODY	

REF.	
FINISH	
SPEC	KER-10004
MATL	
SPEC	
BNC BULK HEAD RECEPTACLE	
DRAWN	C.C. DATE 3 DEC 70
APPR	SC DATE 12-7-70
KINGS ELECTRONICS 44 MARLBOROUGH ROAD TUCKAHOE, N. Y.	
DWG. NO.	KC-79-131