

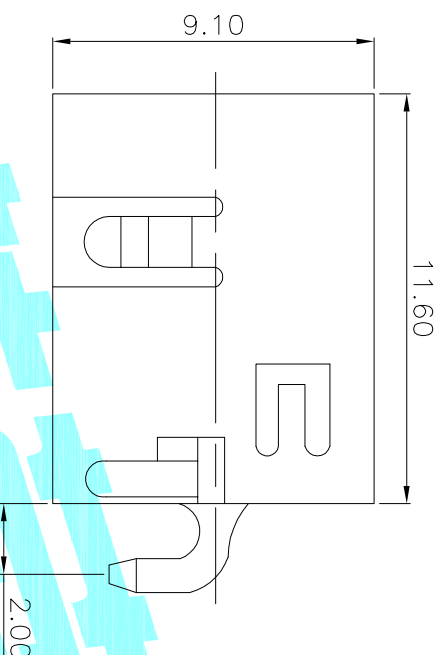


P.C.B LAYOUT TOP VIEW

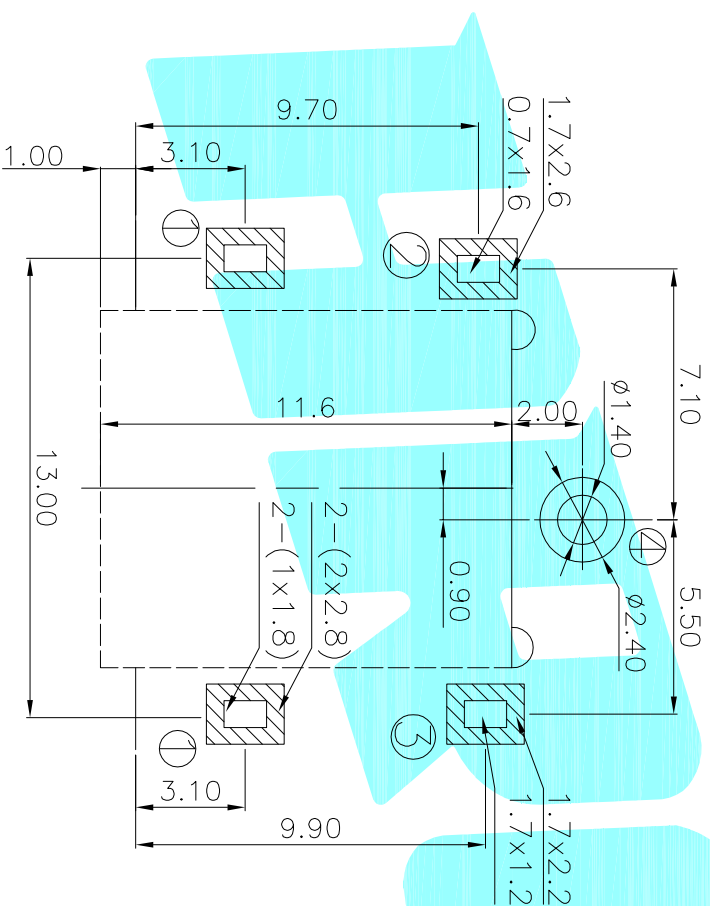

SCHEMATIC

PIN	165	20	25
APPD	165	20	25

Rating:5A 24V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

②	Terminal	3	Phosphor bronze	Au Plating		
①	Housing	1	Nylon	Black		
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE	TITLE: PHONE JACKES			
DRAWN		J.X.Zhong	2013/11/11	ELECTRONICS CO.,LTD		
CHECKED				PART NO. DC-028S		
APPROVALS				SCALE: 1:1		
TOLERANCES ARE		30~0.1±	±0.30	ANGLE	UNIT: mm	PROJ: 1:1
		10~0.30	±0.20			
		5~0.10	±0.15	±2'	DRAWING NO.	SHEET 1 OF 1
		~ 5	±0.10			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			