
High Speed Data Communications Pulse Transformer

For use with 75 Ohm Coaxial Cable

High Isolation 2000Vrms / Fast Rise Times

Small 16-Pin 50 mil SMD Package


Schematic Diagram

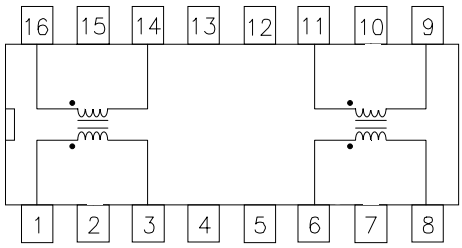

Electrical Specifications at 25° C

Part Number	Schematic Style	Turns Ratio ± 5%	Inductance Pri. OCL (µH min.)	Rise Time 20-80% max. (ns)	Pri. / Sec. $C_{W/W}$ max. (pF)	L_L max. (µH)	DCR max. (Ω)	Hi-Pot min. (V_{RMS})
T-14021	16 Pin Dual	1:1	7.5	0.5	5.0	0.10	0.20	2000

Physical Dimensions
inches (mm)

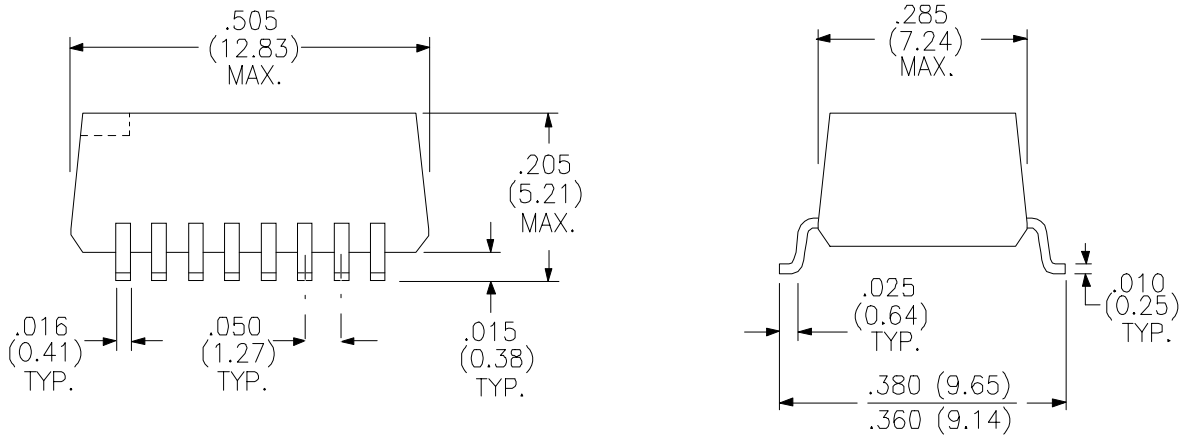

RHOMBUS P/N: T-14021	
CUST P/N:	NAME:
DATE: 05/29/96	SHEET: 1 of 1

Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649
Phone: (714) 898-0960
FAX: (714) 896-0971

www.rhombus-ind.com