

Cree® 5-mm Round LED

Model # LC512TWR1-25Q-A1

Data Sheet

25-degree, 5-mm round LED lamp in warm white color with water-transparent lens and no stopper

Applications

- Advertising Signs
- Indicators
- LCD Back Light
- Illuminations

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$)

| Items | Symbol | Absolute Maximum Rating | Unit |
|--|-----------|--|------|
| Forward Current | I_F | 25 | mA |
| Peak Forward Current <small>Note</small> | I_{FP} | 100 | mA |
| Reverse Voltage | V_R | 5 | V |
| Power Dissipation | P_D | 100 | mW |
| Operation Temperature | T_{opr} | -40 ~ +95 | °C |
| Storage Temperature | T_{stg} | -40 ~ +100 | °C |
| Lead Soldering Temperature | T_{sol} | Max. 260°C for 3 sec. max. (3 mm from the base of the epoxy bulb) | |

Note: Pulse width ≤ 0.1 msec, duty $\leq 1/10$.

Typical Electrical & Optical Characteristics ($T_A = 25^\circ\text{C}$)


| Characteristics | Symbol | Condition | Unit | Minimum | Typical | Maximum |
|--------------------------|--------------------|---------------------------|---------------|---------|---------|---------|
| Forward Voltage | V_F | $I_F = 20$ mA | V | | 3.4 | 4.0 |
| Forward Voltage | V_F | $I_F = 1.0$ μA | V | 1.7 | | 2.5 |
| Reverse Current | I_R | $V_R = 5$ V | μA | | | 100 |
| Luminous Intensity | I_V | $I_F = 20$ mA | mcd | 2130 | 3800 | |
| Chromaticity Coordinates | x | $I_F = 20$ mA | | | 0.426 | |
| | y | $I_F = 20$ mA | | | 0.407 | |
| Color Temperature | CCT | $I_F = 20$ mA | K | | 3000 | |
| 50% Power Angle | $2\theta_{1/2H-H}$ | $I_F = 20$ mA | deg | | 25 | |

Standard Bins for LC512TWR1-25Q-A1 ($I_F = 20 \text{ mA}$)

Lamps are sorted to luminous intensity (I_v) and chromaticity coordinates (x,y) bins shown.

Orders for LC512TWR1-25Q-A1 may be filled with any or all bins contained as below.

All luminous intensity (I_v) and chromaticity coordinates (x,y) values shown and specified are at $I_F = 20 \text{ mA}$.

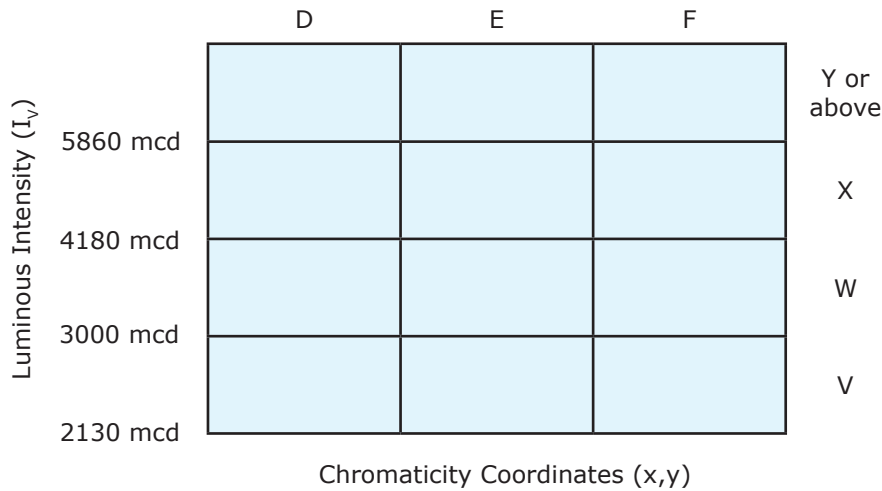


| Rank | | D | | | | E | | | | F | | | |
|--------------------------|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Chromaticity Coordinates | x | 0.3541 | 0.3610 | 0.4030 | 0.3822 | 0.3822 | 0.4030 | 0.4490 | 0.4129 | 0.4129 | 0.4490 | 0.5080 | 0.4588 |
| | y | 0.3401 | 0.3900 | 0.4250 | 0.3580 | 0.3580 | 0.4250 | 0.4530 | 0.3725 | 0.3725 | 0.4530 | 0.4720 | 0.3838 |

Important Notes:

- All ranks will be included per delivery; rank ratio will be based on the dice distribution.
- Pb content <1000 ppm.
- Tolerance of measurement of luminous intensity is $\pm 15\%$.
- Tolerance of measurement of the color coordinates is ± 0.01 .
- Tolerance of measurement of V_F is $\pm 0.05 \text{ V}$.
- Packaging methods are available for selection; please refer to the "Cree LED Lamp Packaging Standard" document.
- Please refer to the "Cree LED Lamp Reliability Test Standards" document for reliability test conditions.
- Please refer to the "Cree LED Lamp Soldering & Handling" document for information about how to use this LED product safely.

CIE Chromaticity Diagram

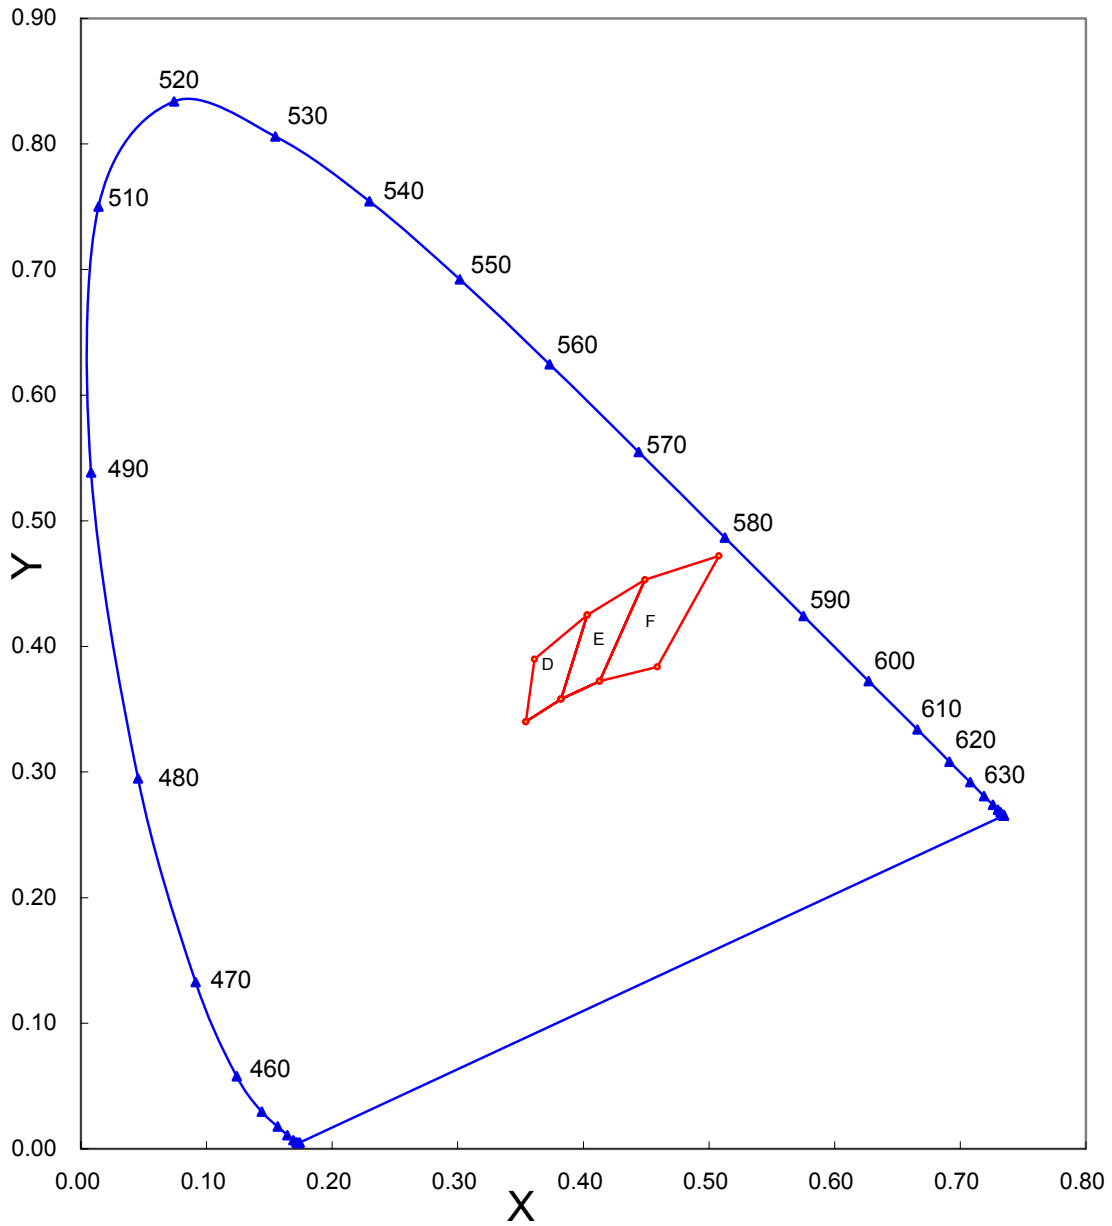

Graphs

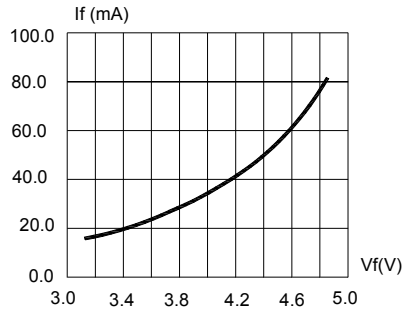


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

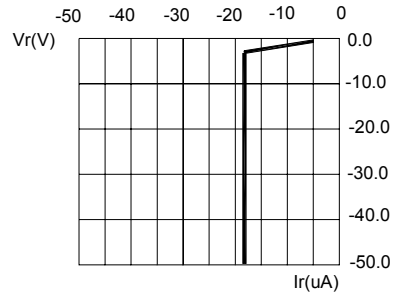


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE.

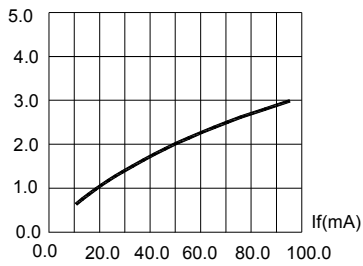


FIG.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT




FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.

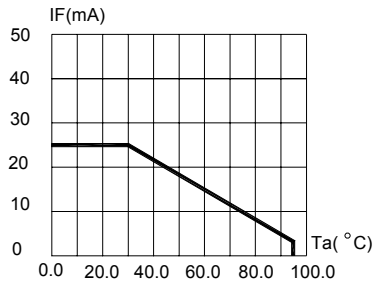


FIG.5 MAXIMUM FORWARD DC CURRENT VS AMBIENT TEMPERATURE (Tjmax=105°C)


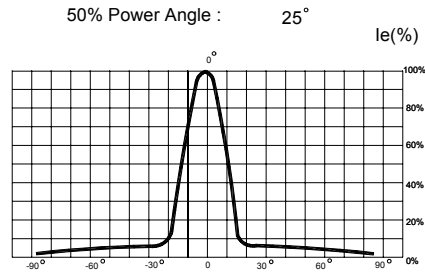


FIG.6 FAR FIELD PATTERN

Kit Number System

Cree LED lamps are tested and sorted into performance bins. A bin is specified by ranges of color, forward voltage, and brightness. Sorted LEDs are packaged for shipping in various convenient options. Please refer to the "Cree LED Lamp Packaging Standard" document for more information about shipping and packaging options.

Cree LEDs are sold by order codes in combinations of bins called kits. Order codes are configured in the following manner:

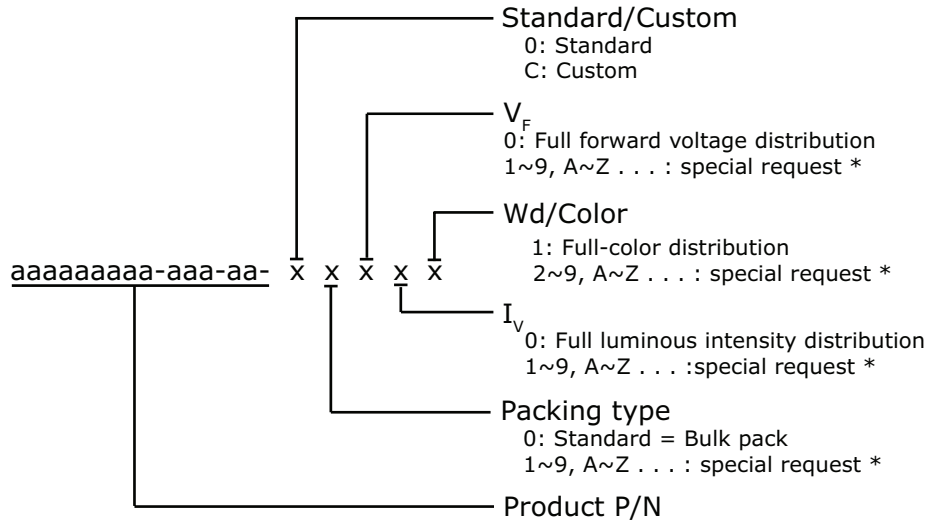

* Contact your Cree sales representative for ordering information.

Standard Available Kits*

| Kit Number | Description |
|------------------------|---|
| LC512TWR1-25Q-A1-00001 | 5mm Round 25 Warm White, FULL RANK, Bulk Pack |

* Please contact your Cree representative about the availability of non-standard kits.