

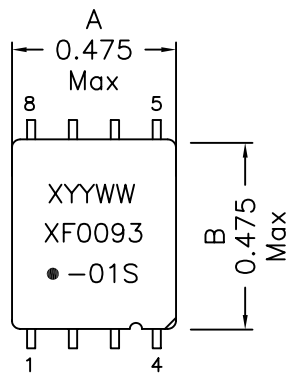



## 1. Mechanical Dimensions:




Top view

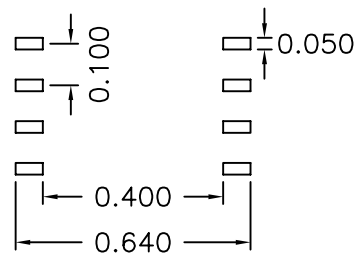

(SUGGESTED MOUNTING PAD)

## 2. Schematic:

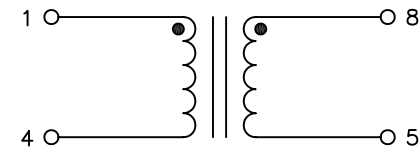

## 3. Electrical Specifications: @25°C

Isolation Voltage: 1500Vrms, Wdg to Wdg

Inductance: 9.0mH±30% @100KHz 20mV

Q: 8 Min @10KHz 50mV

DC Resistance: 0.600 Ohms Max, Each Wdg

### Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40C to +85C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component


DOC. REV: B/1

<b>XFMRs Inc.</b> <a href="http://www.XFMRS.com">www.XFMRS.com</a>	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0093-01S	REV. B
TOLERANCES: .xxx ±0.010	DWN.	Feng	May-29-12
Dimensions in Inch	CHK.	YK Liao	May-29-12
SHEET 1 OF 2	APP.	BW	May-29-12

**PROPRIETARY**

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XF0093-01S

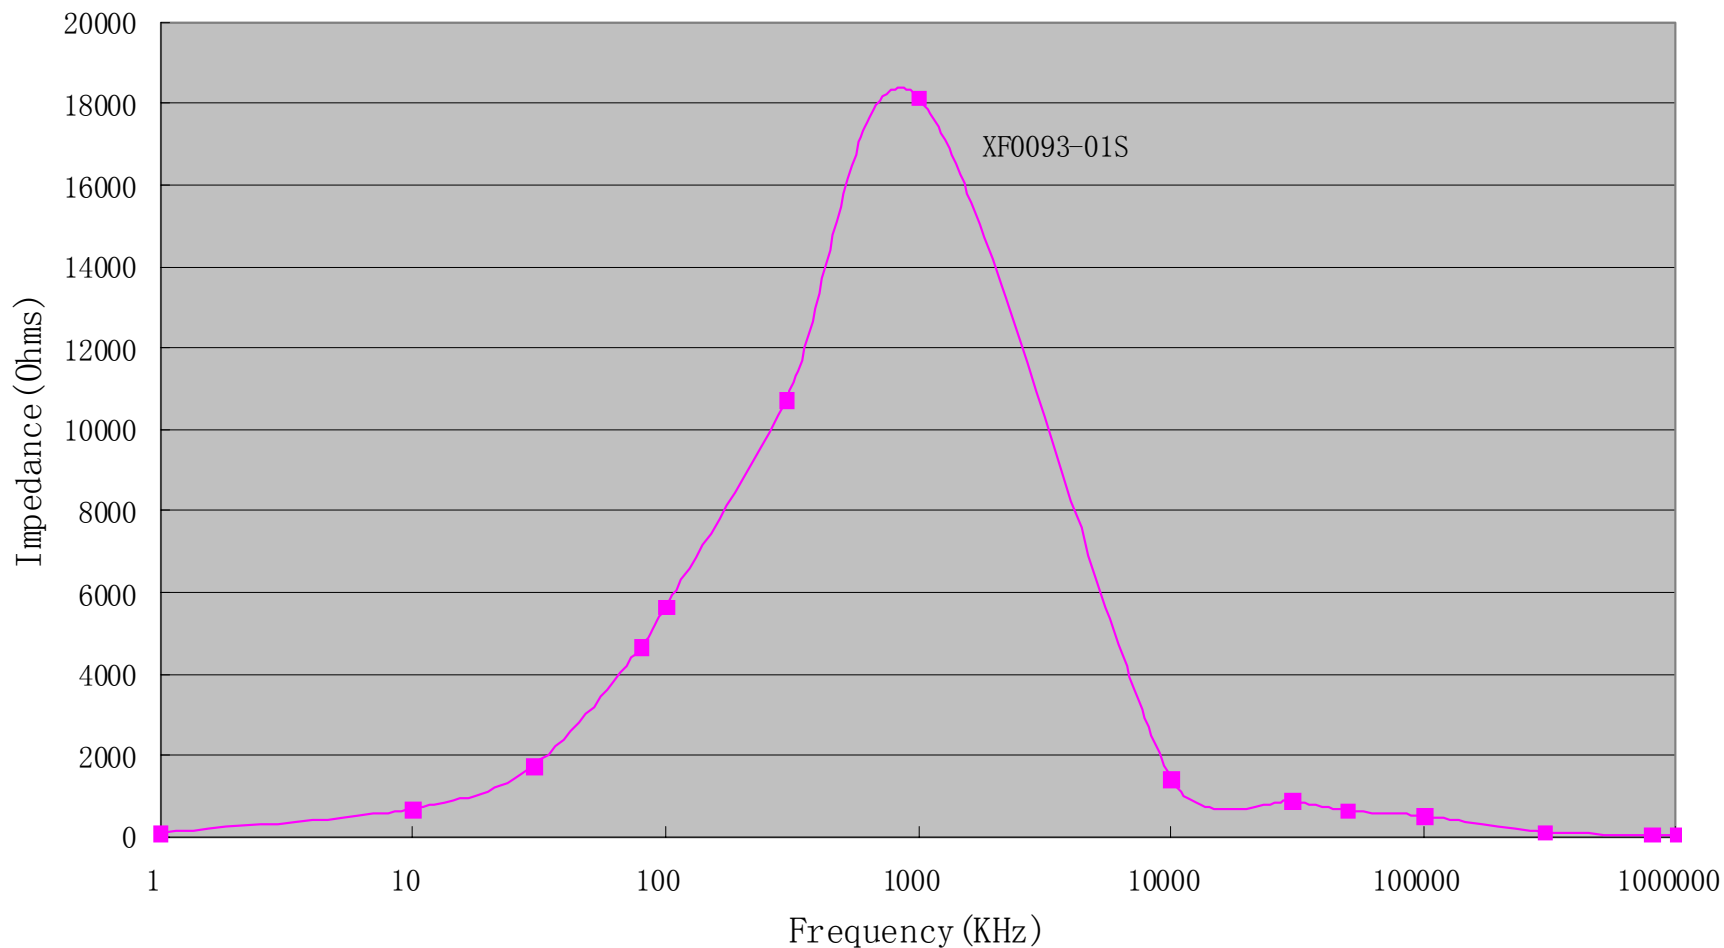

<b>XFMRs Inc.</b> www.XFMRS.com	Title: COMMON MODE CHOKE			
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF0093-01S	REV. B	
	DWN.	Feng	May-29-12	
	CHK.	YK Liao	May-29-12	
SHEET 2 OF 2	APP.	BW	May-29-12	

DOC. REV: B/1

**PROPRIETARY**

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.