


Bridge Rectifiers

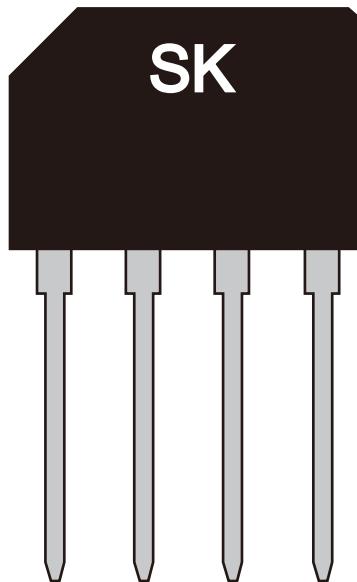

Features

- Glass passivated die construction
 - Low forward voltage drop
 - High current capability
 - High surge current capability
- Plastic material-UL flammability 94V-0

Mechanical Data

- Case: KBP, molded plastic
- Terminals: plated leads solderable per MIL-STD-202, Method 208
- Polarity: as marked on case
- Mounting position: Any
- Marking: type number
- Lead Free: For RoHS / Lead Free Version

■ Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

TYPE NUMBER	SYMBOL	KBP 3005G	KBP 301G	KBP 302G	KBP 304G	KBP 306G	KBP 308G	KBP 310G	UNITS
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
	V_{RWM}								
	V_{DC}								
RMS Reverse Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Average Rectified Output Current (Note 1) $\text{@} T_a=50^\circ\text{C}$	I_o	3.0							A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	60							A
Forward Voltage per element @IF=3.0A	V_{FM}	1.1							V
Peak Reverse Current @ $T_a=25^\circ\text{C}$ At Rated DC Blocking Voltage @ $T_a=125^\circ\text{C}$	I_R	5.0 500							uA
Typical Thermal Resistance per leg (Note 2)	$R_{\theta JA}$	30							°C/W
	$R_{\theta JL}$	11							
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150							°C

Note:1. Mounted on glass epoxy PC board with 1.3mm² solder pad.

2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C..

■ Characteristics(Typical)

Fig. 1 Forward Current Derating Curve

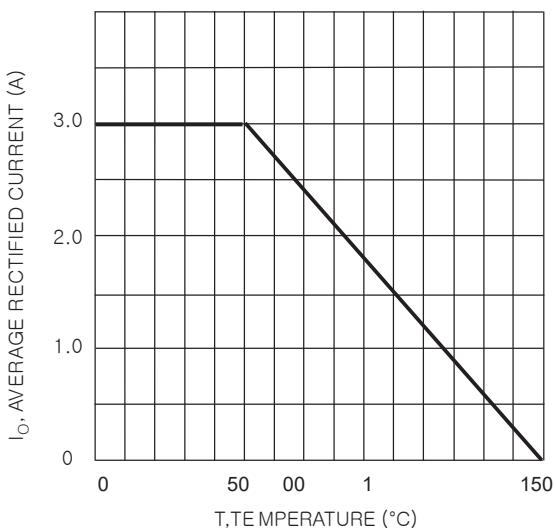


Fig. 2 Typical Fwd Characteristics

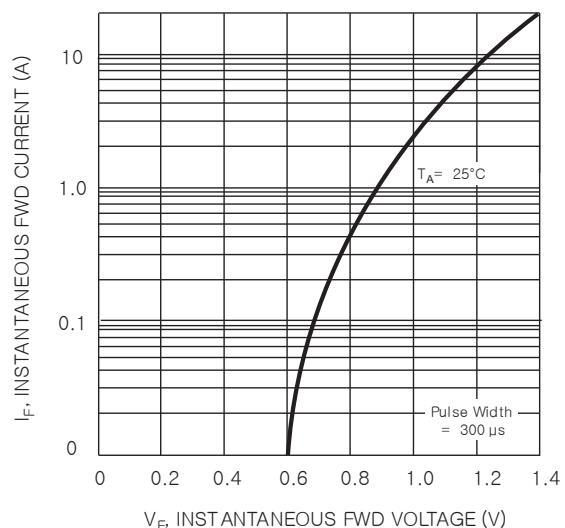


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

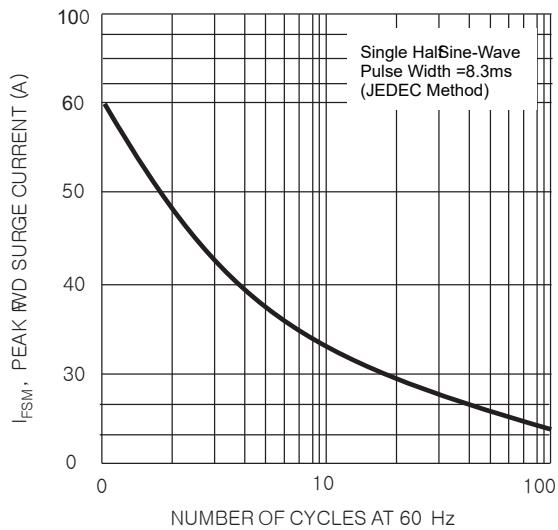


Fig. 4 Typical Junction Capacitance


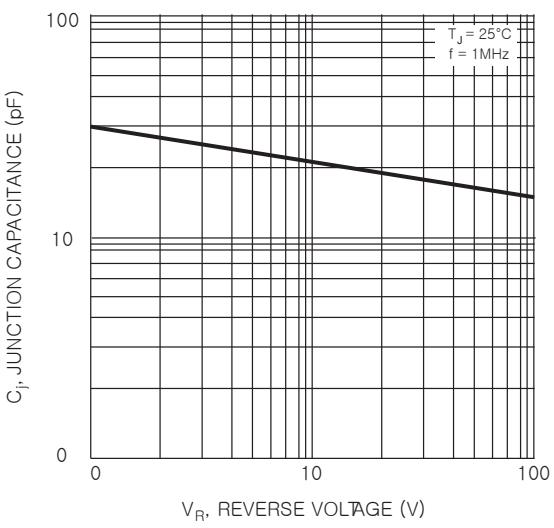


Fig. 5 Typical Reverse Characteristics (per element)

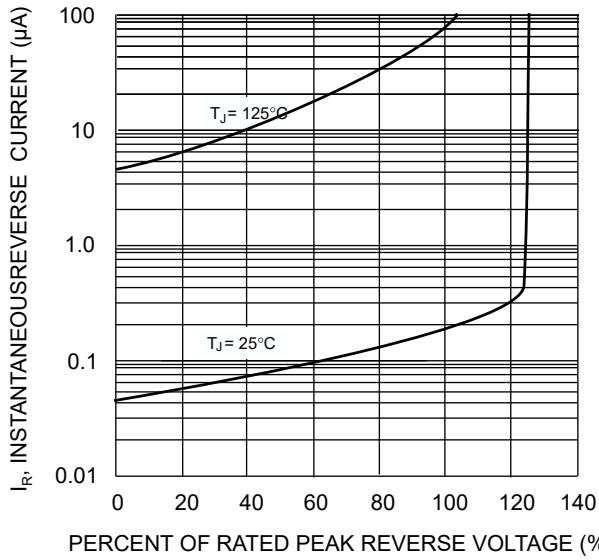

■Outline Dimensions