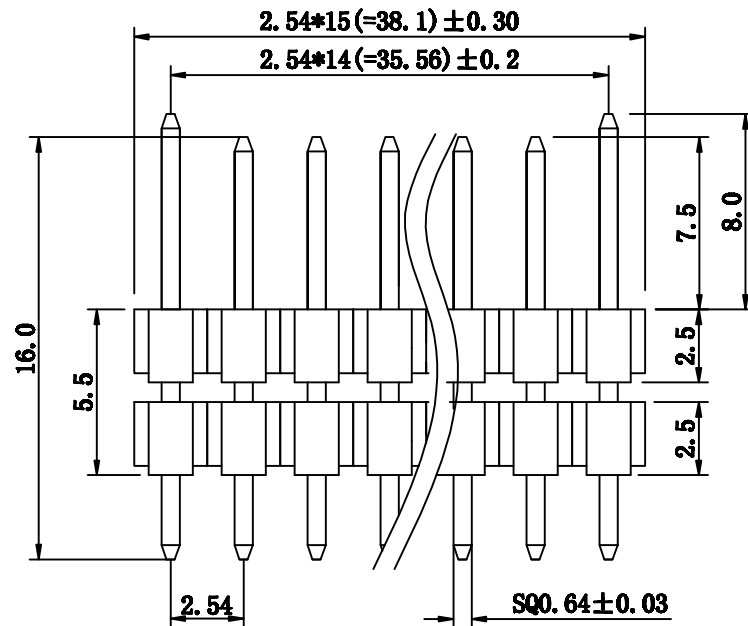
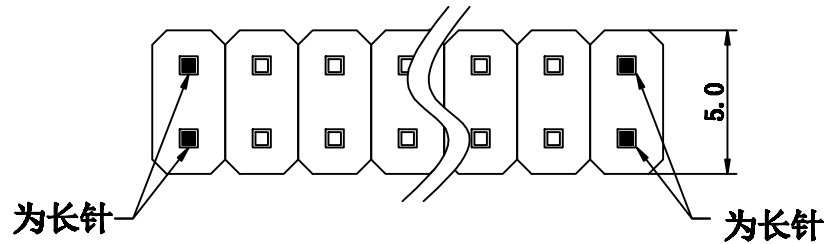


RECOMMENDED P.C.B LAYOUT

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

Specification

Insulator Material: Polysetr,UL94V-0
Standard: PA6T

Contact Material: Brass

Contact plated: 0.8u" Gold Over Nickel

Poles:2~40P (Double)


Current Rating : 3Amp

Contact Resistance:20 Milliohms Max

Insulation Resistace : 1000MΩ Min.

Dielectric withstanding Voltage:AC 500V

Operation Temperature : -40℃ -- +105℃

APPROVED:	DATE:	C _{kmtw} 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO., LTD					
CHECKED:	DATE:	TITLE: 210S-2*15P L=16.0/16.5MM 双塑(PA6T料)					
DRAWN: luli-Liu	DATE: 2016-10-28	CLIENT P/N		281301000012			
		UNIT	mm	SCALE	free		
		FILE NO.		S062100028		REV.	A