

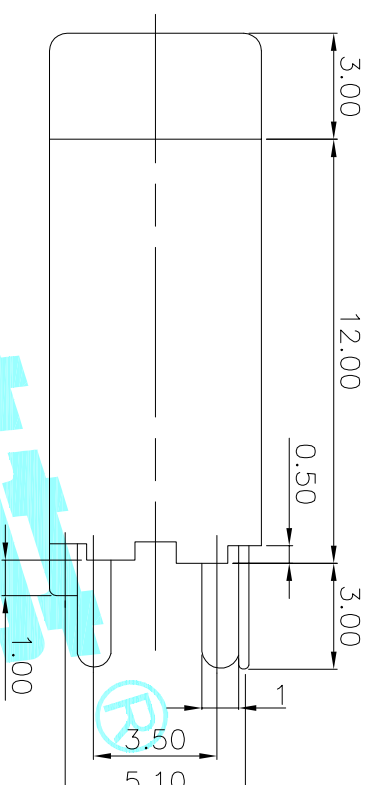
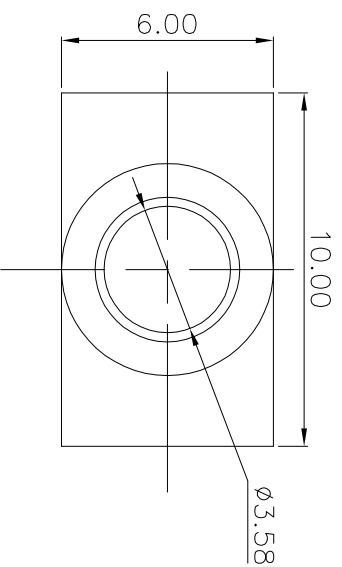


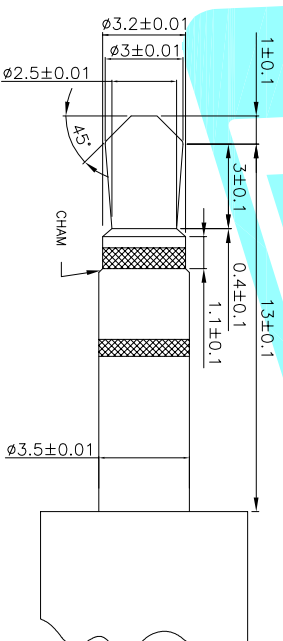

P.C.B LAYOUT(copper-sided view)

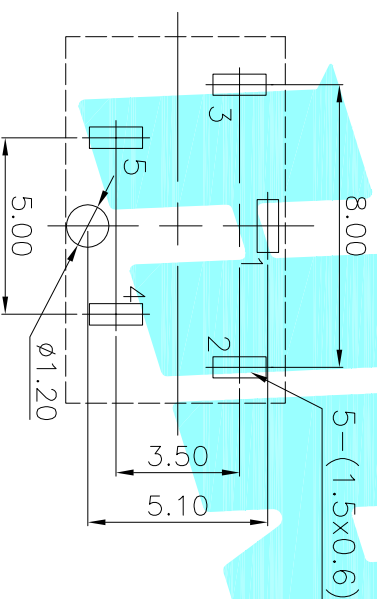

Model NO.	PJ-3580-A
Schematic	

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:−20℃~70℃
Operating force:3~20N
Operating Life:5,000cycles

Rating:0.5A 30V DC								
Contact Resistance:100 mΩ Max.								
Operating temperature:-20℃~70℃								
Operating force:3-20N								
Operating Life:5,000cycles								
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.		
_____	A	_____	NEW	_____	_____	_____		
CHECKED				TITLE:	PHONE JACKETS			
DRAWN				J.X.Zhang	2013/11/11	ELECTRONICS CO.,LTD		
APPROVALS						DATE		
②	Terminal	_____	5	Phosphor bronze	Au Plating	_____		
①	Housing	_____	1	Nylon	Black	_____		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK		
APPROVALS				DATE				
TOLERANCES ARE				30~以上 10~30 5~10 ~ 5	+0.30 +0.20 +0.15 ± 0.10	ANGLE	± 2°	DRAWING NO.
				UNIT: mm	SCALE: 1:1	PROJ. 		SHEET 1 OF 1
APPROVALS				PART NO.		PJ-3580		