

Specifications(规格):

Voltage rating(额定电压):500V AC/DC

Current rating(额定电流):2A AC/DC

Withstanding voltage(耐压值):1500V AC/minute

Temperature range(工作温度):-40°C~+85°C

Insulation resistance(绝缘电阻):1000MΩ

Contact resistance(接触电阻):<30mΩ

After environmental testing(环境测试后):<40mΩ

X3700 H-02-PT




① ② ③ ④

1.系列

2.类别:H-HSG

3.PIN数或防呆KEY形态:单排-XX

4.材质:PA66, UL94V-0

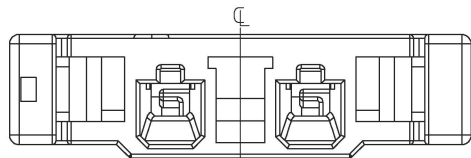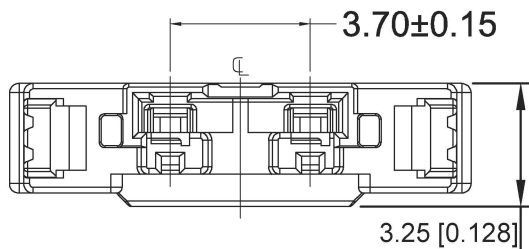

X3700H-02-PT	PA66 UL94V-0	X3700T	X3700W
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

广东星坤科技股份有限公司

生	日期
發	

ΔX	DESCRIPTION	DATE	REVISED	APPROVED
MARK	文件工程章			

REVISIONS

www.xk-lg.cn www.helloxkb.com www.helloxkb.cn

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5

UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: X3700H-02-PT
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	3.70mm BTB Style Connectors
APPD	DATE	SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT
			1.0g
			SHEET
			1/1
			REVISION
			A0