


REVISION			
REV.	DESCRIPTION	DATE	APPROVED

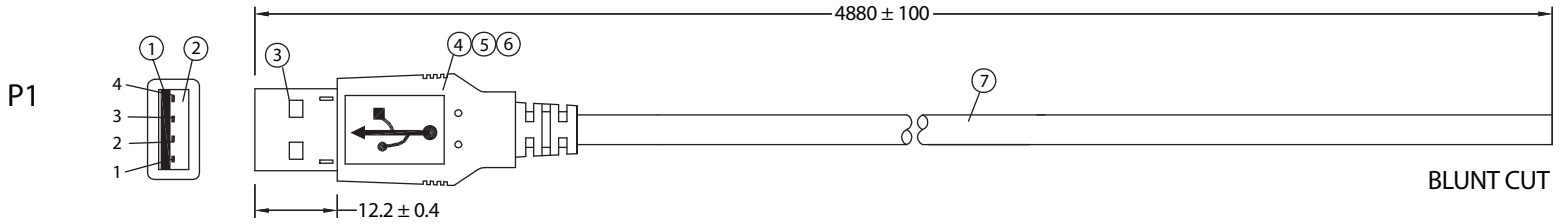

TAPE

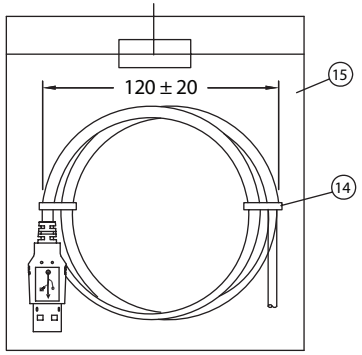

PIN OUT

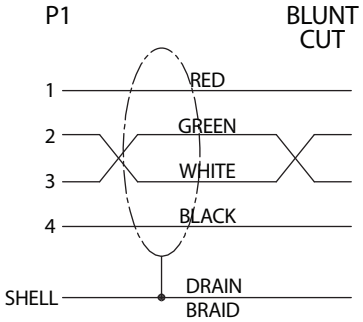

NOTES:

1. CABLE: UL2725 24/26AWG
   (26AWGx1P+24AWGx2C+FOIL+DW+BD)x1
   OUTER JACKET: BLACK, OD: 4.5 ± 0.2mm
   PRINTING: "E166307 AWM 2725 24/26AWG 80˚C 30V VW-1
   HI-SPEED USB 2.0"
2. CONNECTORS: USB 4P(A) MALE TO OPEN
3. HOOD: MOLDED TYPE
4. ELECTRICAL TEST:
   <1>.100% OPEN SHORT & MISS WIRE TEST
   <2>. INSULATION RESISTANCE: DC400V 10M ohm MIN.
   <3>. CONDUCTOR RESISTANCE: 1 ohm MAX.
5. PACKING: 1PC/POLYBAG

No.	PARTS NAME	SPECIFICATION STANDARD	QTY	REMARKS
①	USB 4P(A)/M - CONTACT	BRASS / GOLD PLATED (CRIMPING TYPE)	4	
②	USB 4P(A)/M - INSULATOR	PBT+G,F / WHITE UL94V-0	1	
③	USB 4P(A)/M - SHELL 1	STEEL GOLD PLATED	1	
④	USB 4P(A)/M - SHELL 2	STEEL GOLD PLATED	1	
⑤	USB 4P(A)/M - COPPER FOIL	WIDTH: 5xLENGTH 27	1	
⑥	USB 4P(A)/M - OUTER MOLD	45P PVC / COLOR: BLACK	1	
⑦	CABLE	L01007ABK01A	1	
⑧	MINI TIE	PE / BLACK	2	
⑨	POLYBAG	PE / 0.08x160x180	1	

Dim range (mm)	Tolerance +/- (mm)
0-1	0.15
1-6	0.20
6-18	0.30
18-50	0.50
50-120	0.70
120-250	0.90
250-500	1.20

Qualtek Electronics Corp.
WCT DIVISION

Part Number: 3021023-16 RoHS Compliant

Description: USB 4P(A)/M - BLUNT CUT

	Drawn / Date	Checked / Date	Approved / Date
	B. Grubb 01-26-07	01-26-07	JJH / 01-26-07