

PS008 Power Supply Data Sheet



9 Vdc 0.67 A Plug & Go SMPSU


Product Image



Please Note: Unit comes with a UK, Euro and USA AC head.
Australian head pictured here is available as an additional requested item.



Mechanical Drawings (mm)

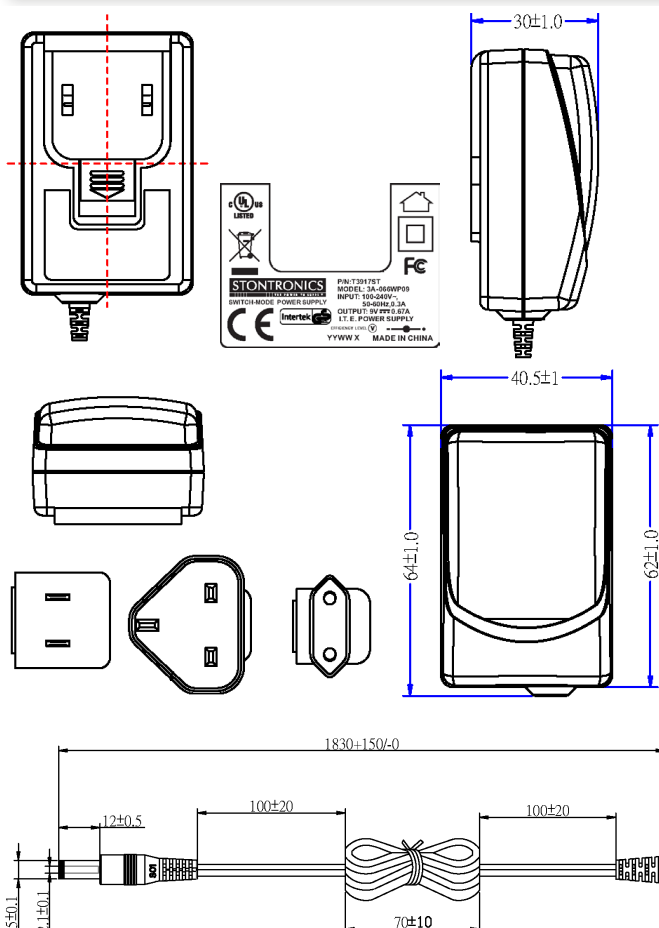

#22AWGX2C UL2468 HAVE ON WORD WIRE IN OUTER, NO WORD WIRE IN INNER
OD: $\varnothing 1.7 \times 3.4$

Input

Input Voltage Range 90 - 264 VAC
Input Voltage Rating 100 - 240 VAC
Frequency Range 47 - 63 Hz
Frequency Rating 50 - 60 Hz
Input Current 300 mA RMS max.
Inrush Current .. 15A (115VAC) / 30A (230VAC) max. at cool start
Leakage Current 0.25 mA
Input Power (with no load)..... <0.3 W
AC Plug Interchangeable - UL, VDE, UK (SAA available)

Output

Output Voltage +9 VDC
Current Min 0 amp.
Current Max 0.67 amp.
Power Rating 6 watt
Line Regulation +/- 3 %
Output Voltage Tolerance +/- 5 %
Ripple And Noise 150 mV p-p max.
Efficiency 73% min.
Over voltage protection Protection through the Primary Circuit IC
Short circuit protection Output shut down and auto restart
Output Cable and Plug..... 2.1x5.5x12 C+ve | 1.83 meter DC lead

Other

Dimensions 64 (L) * 40.5 (W) * 30 (H) mm max.
Weight 112 g max.
Operating Temperature 0 °C to 40 °C
Storage Temperature -10 °C to 70 °C
Operating Humidity 20 ~ 80 % RH Non-Condensing
Storage Humidity 10 ~ 90 % RH Non-Condensing

Safety

Hi-Pot I/P to O/P 3000 VAC or 4242 VDC 10 mA 1 min.
Insulation Resis. I/P to O/P 500 VDC not less than 100 MΩ
EMI Standards
Designed To meet FCC Part15B; EN55022B
Safety Standards
Safety approved to: UL/CUL,GS & CE

Disclaimer

Pico Technology accepts no responsibility for typographical errors in the production of this leaflet. Product specifications are subject to change without notice.

Pico Technology Ltd is ISO 9001:2008 registered.



For more information please contact us:

Pico Technology
James House, Colnworth Business Park, St Neots, Cambs. PE19 8YP
Tel: 01480 396395 • Fax: 01480 396395
Email: support@picotech.com • www.picotech.com