

CMC501-SERIES



- Low Power Oscillator
- HCMOS/ LVCMOS output
- SMD package 5.0 x 3.2 mm

ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
Frequency Range	f_0	Any Frequency between Frequency range, accurate to 6 decimal places	1.0		110.0	MHz
Supply Voltage	V_s		1.8		3.3	V
Supply Current	I_s	$V_s = 1.8V, f_0=20MHz$, no load		3.5	4.1	mA
		$V_s = 2.5V, f_0=20MHz$, no load		3.7	4.2	mA
		$V_s = 2.8V, f_0=20MHz$, no load		3.8	4.5	mA
		$V_s = 3.3V, f_0=20MHz$, no load		3.8	4.5	mA
Operating Temperature	T_a		-20		+70	°C
			-40		+85	°C
Frequency Stability	$\Delta f/f_0$	Including First Year aging, initial frequency tolerance at 25°C, Frequency stability over temperature range, supply variation, load variation	-20 -25 -50		+20 +25 +50	ppm ppm ppm
Enable / Disable/ Standby Function	$E/D/St$	Enable = Open or "1" ($V_{IH} \geq 0.75V_s$) (output signal active)	0.75Vs			V
		Disable = GND or "0" ($V_{IL} < 0.25V_s$) (output high impedance, oscillator operates)			0.25Vs	V
		Standby = GND or "0" ($V_{IL} < 0.25V_s$) (output weakly pulled down, oscillator sleep mode)			0.25Vs	V
Enable / Disable Time	$T_{E/D}$	$f_0=110MHz$			130	ms
Enable / Disable Current	$I_{E/D}$	$V_s=1.8V, E/D = GND$			4.0	mA
		$V_s=2.5V$ to $3.3V, E/D = GND$ Output in high impedance state			4.2	mA
Standby Current	I_{stby}	STBY=GND, $V_s=1.8V$		0.2	1.3	μA
		STBY=GND, $V_s=2.5V$		1.1	2.5	μA
		STBY=GND, $V_s=2.8V$ to $3.3V$ Output is weakly pulled down		2.1	4.3	μA
Startup Time	T_{ST}				5	ms
RMS Phase Jitter	J_{PH}	$f_0=75MHz, BW 900KHz$ to $7.5MHz$		0.5	0.9	ps
		$f_0=75MHz, BW 12KHz$ to $20MHz$		1.3	2.0	ps
RMS Period Jitter	J_P	$f_0=75MHz$		1.8	3	ps
Peak to Peak Period Jitter	J_{PK-PK}	$f_0=75MHz, V_s=2.5$ to $3.3V$		12	25	ps
		$f_0=75MHz, V_s=1.8V$		14	30	ps

CMC501-SERIES

OUTPUT CHARACTERISTICS

	PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
				Min	Typ.	Max	
LVC MOS	Output Levels	V_{OH}	$I_{OH} = -2 \text{ mA (Vs=1.8V)}$ $I_{OH} = -3 \text{ mA (Vs=2.5V or 2.8V)}$ $I_{OH} = -4 \text{ mA (Vs=3.0V or 3.3V)}$	0.9 Vs			V
		V_{OL}	$I_{OL} = 2 \text{ mA (Vs=1.8V)}$ $I_{OL} = 3 \text{ mA (Vs=2.5V or 2.8V)}$ $I_{OL} = 4 \text{ mA (Vs=3.0V or 3.3V)}$			0.1Vs	V
	Duty Cycle	DC	50% Output level	45		55	%
	Output Load	O_{CL}	$T_a = 25^\circ \text{C}$		15	60	pF

Table 1. Rise/Fall Time vs. CLoad (CL), Vs=1.8V

CL	5pF	15pF	30pF	45pF	60pF
Drive Strength	@20% to 80% (ns) typ.				
D0, default	0.65	1.30	2.40	3.35	4.56
D1	0.70	1.48	2.64	3.68	5.09
D2	0.78	1.66	2.94	4.09	5.74
D3	0.93	1.91	3.32	4.66	6.48
D4	1.65	3.23	5.79	8.18	11.08
D5	2.11	4.31	7.65	10.77	14.47
D6	3.19	6.35	11.00	16.01	21.52
D7	6.16	11.61	22.00	31.27	39.91

Table 2. Rise/Fall Time vs. CLoad (CL), Vs=2.5V

CL	5pF	15pF	30pF	45pF	60pF
Drive Strength	@20% to 80% (ns) typ.				
D0	0.34	0.88	1.64	2.54	3.32
D1	0.43	0.96	1.81	2.79	3.65
D2, default	0.54	1.00	2.01	3.10	4.01
D3	0.62	1.28	2.27	3.51	4.45
D4	1.09	2.20	3.88	5.86	7.57
D5	1.45	2.81	5.16	7.65	9.88
D6	2.11	4.27	7.64	11.20	14.49
D7	4.13	8.25	12.82	21.45	27.79

CMC501-SERIES

Table 3. Rise/Fall Time vs. CLoad (CL), Vs=2.8V

CL	5pF	15pF	30pF	45pF	60pF
Drive Strength	@20% to 80% (ns) typ.				
D0	0.29	0.81	1.48	2.29	2.99
D1	0.34	0.88	1.64	2.52	3.30
D2, default	0.44	1.00	1.83	2.82	3.67
D3	0.55	1.12	2.08	3.22	4.08
D4	0.97	2.00	3.54	5.43	6.93
D5	1.29	2.57	4.72	7.01	9.06
D6	1.94	3.90	7.03	10.24	13.34
D7	3.77	7.54	12.28	19.57	25.27

Table 4. Rise/Fall Time vs. CLoad (CL), Vs=3.0V


CL	5pF	15pF	30pF	45pF	60pF
Drive Strength	@20% to 80% (ns) typ.				
D0	0.27	0.76	1.39	2.16	2.85
D1	0.30	0.83	1.55	2.40	3.13
D2	0.38	0.92	1.72	2.71	3.51
D3, default	0.51	1.00	1.97	3.07	3.90
D4	0.89	1.92	3.39	5.20	6.64
D5	1.22	2.46	4.54	6.76	8.62
D6	1.84	3.71	6.72	9.86	12.68
D7	3.60	7.21	11.97	18.74	24.30

Table 5. Rise/Fall Time vs. CLoad (CL), Vs=3.3V

CL	5pF	15pF	30pF	45pF	60pF
Drive Strength	@20% to 80% (ns) typ.				
D0	0.25	0.72	1.31	1.83	2.61
D1	0.28	0.79	1.46	2.05	2.93
D2	0.33	0.87	1.64	2.30	3.35
D3, default	0.46	1.00	1.86	2.60	3.84
D4	0.81	1.82	3.22	4.52	6.33
D5	1.16	2.33	4.29	6.04	8.34
D6	1.74	3.50	6.38	8.98	12.19
D7	3.39	6.88	11.63	17.56	23.59

CMC501-SERIES

MECHANICAL DIMENSIONS AND PIN FUNCTIONING

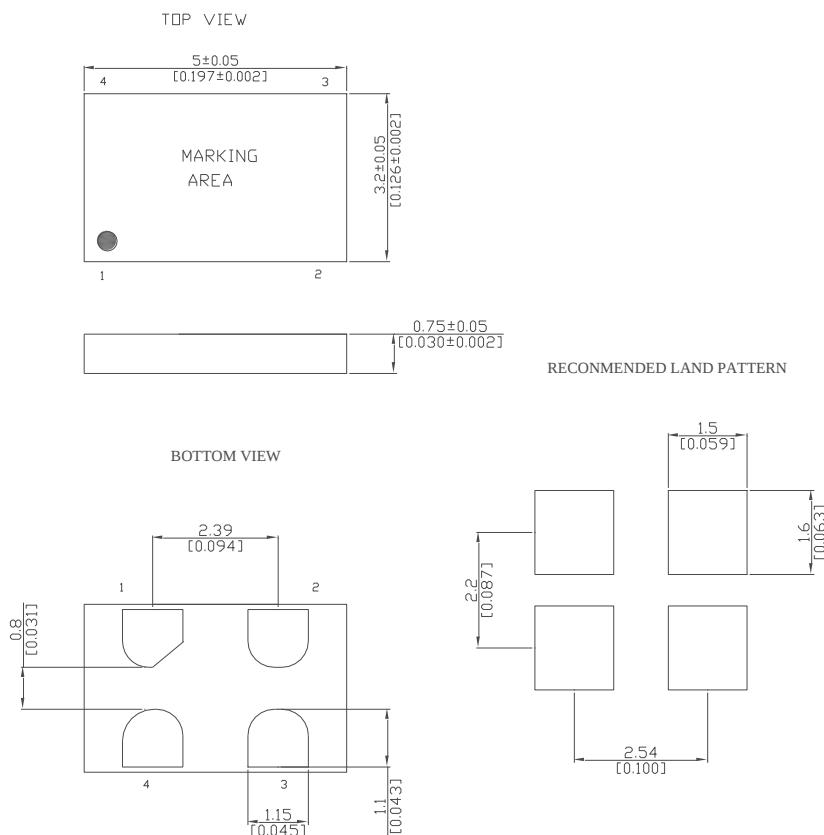

PIN	SYMBOL	FUNCTION
1	E/D/STBY/N	H :Enable output frequency L:Disable output frequency , high impedance In E/D or STBY mode connect a pull-up resistor of 10kΩ to pin 1, in case not externally driven. In case pin1 is left floating, use N option
2	GND	Electrical Ground
3	OUTPUT	Output Signal
4	Vs	Supply Voltage


Note: Connect a capacitor of 0.1μF or higher value between Vs and GND

CMC501-SERIES

ENVIRONMENTAL

Soldering	MIL-STD-883F, Method 2003
Moisture Sensitivity Level	MSL 1 at 260°C
Temperature Cycle	JESD22, Method A104
Vibration	MIL-STD-883F, Method 2007
Mechanical Shock	MIL-STD-883F, Method 2002
Storage Temperature	-65° +150°C

REFLOW PROFILE

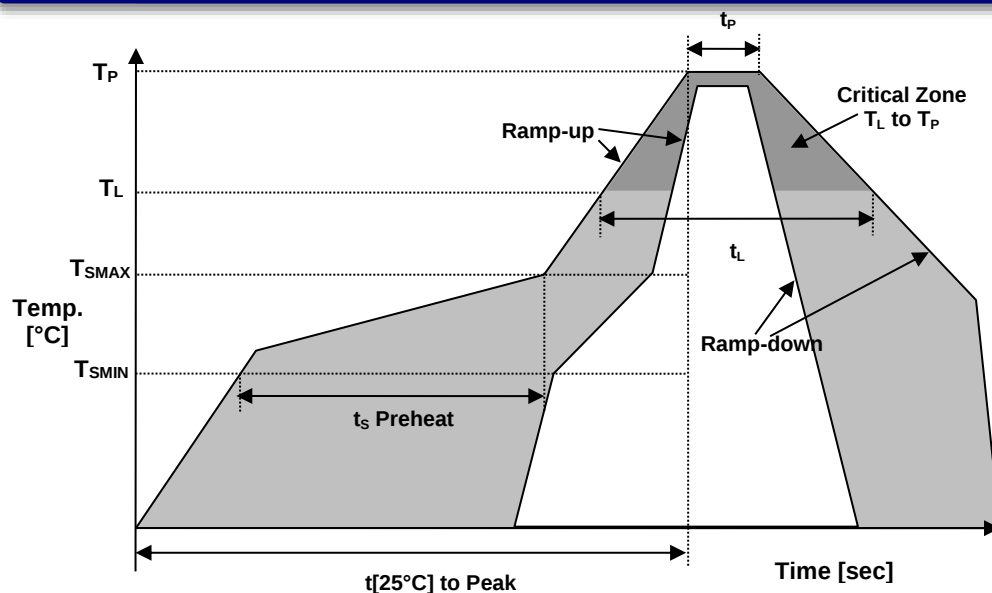

Recommended Solder Reflow Profile		
Temperature Min Preheat	T _{SMIN}	150°C
Temperature Max Preheat	T _{SMAX}	200°C
Time (T _{SMIN} to T _{SMAX})	t _s	60-180 sec.
Temperature	T _L	217°C
Peak Temperature	T _P	260°C
Ramp-up rate	R _{UP}	3°C/sec max.
Ramp-down rate	R _{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t _p	10 sec
Time t[25°C] to Peak Temperature	t[25°C] to Peak	480 sec.
Time	t _L	60-150 sec.

CMC501-SERIES

ORDERING INFORMATION

SERIES	SUPPLY VOLTAGE (V)	Frequency Stability	TEMP RANGE (°C)	Output Drive	Enable/ Disable Function	-	OUTPUT FREQUENCY (MHz)
CMC501	18: Vs=1.8V 25: Vs=2.5V 28: Vs=2.8V 30: Vs=3.0V 33: Vs=3.3V XX: Vs=2.5V-10% to 3.3V+10%	A:±20ppm B:±25ppm C:±50ppm	U: -20~70 V: -40~85	1:D0 2:D1 3:D2 4:D3 5:D4 6:D5 7:D6 8:D7 See table 1 to 5	E: E/D output S:Standby N: No connect	-	

APPROVALS

Eng. approval, date: SP, 07/05/2016

Created by, date: SP, 07/05/2016

Revision: A