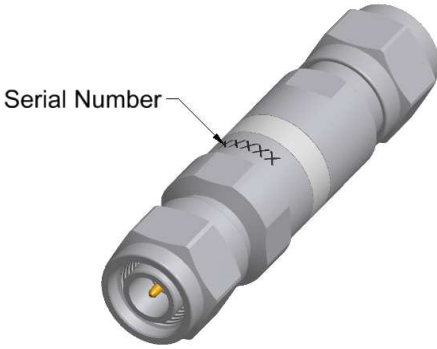
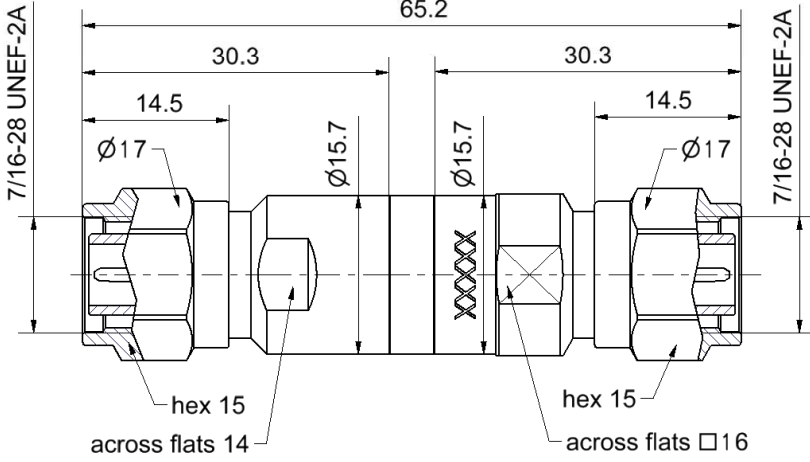


Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/09.14/6.2

Technical Data Sheet		Rosenberger																		
RPC-TNC	Calibration Adaptor Plug/Plug	06S121-S20S3																		
 Serial Number  65.2 30.3 30.3 14.5 14.5 Ø17 Ø15.7 Ø15.7 Ø17 7/16-28 UNEF-2A 7/16-28 UNEF-2A hex 15 across flats 14 hex 15 across flats 16																				
All dimensions are in mm; tolerances according to ISO 2768 m-H																				
Interface According to IEC 61169-26																				
Documents Application note AN001 "Calibration Services"																				
Material and plating <table><tr><td>Connector parts</td><td>Material</td><td>Plating</td></tr><tr><td>Center conductor</td><td>CuBe</td><td>Gold, min. 1.27 µm, over nickel</td></tr><tr><td>Outer conductor</td><td>Stainless steel</td><td>Passivated</td></tr><tr><td>Body</td><td>Stainless steel</td><td>Passivated</td></tr><tr><td>Coupling nut</td><td>Stainless steel</td><td>Passivated</td></tr><tr><td>Dielectric</td><td>PTFE / PPE</td><td></td></tr></table>			Connector parts	Material	Plating	Center conductor	CuBe	Gold, min. 1.27 µm, over nickel	Outer conductor	Stainless steel	Passivated	Body	Stainless steel	Passivated	Coupling nut	Stainless steel	Passivated	Dielectric	PTFE / PPE	
Connector parts	Material	Plating																		
Center conductor	CuBe	Gold, min. 1.27 µm, over nickel																		
Outer conductor	Stainless steel	Passivated																		
Body	Stainless steel	Passivated																		
Coupling nut	Stainless steel	Passivated																		
Dielectric	PTFE / PPE																			
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de		Tel. : +49 8684 18-0 Email : info@rosenberger.de Page 1 / 3																		

Electrical data

Frequency range	DC to 18 GHz
Return loss	≥ 30 dB, DC to 4 GHz ≥ 20 dB, 4 GHz to 18 GHz

Mechanical data

Mating cycles	≥ 500
Maximum torque	1.70 Nm
Recommended torque	0.55 Nm
Gauge	5.28 mm to 5.38 mm

General standard definitions

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

Offset Z_o / Impedance / Z_o	50 Ω
Offset Delay	250.84 ps
Length (electrical) / Offset Length	75.20 mm
Offset Loss	2.50 G Ω /s
Loss	0.0545 dB/ $\sqrt{\text{GHz}}$

Environmental data

Operating temperature range ¹	+ 20 °C to +26 °C
Rated temperature range of use ²	0 °C to +50 °C
Storage temperature range	- 40 °C to +85 °C

RoHS	compliant
------	-----------

¹ Temperature range over which these specification are valid.

² This range is underneath and above the operating temperature range, within the calibration adaptor is fully functional and could be used without damage.

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/09.14/6.2

Technical Data Sheet				Rosenberger			
RPC-TNC		Calibration Adaptor Plug/Plug		06S121-S20S3			
Declaration of calibration options Factory Calibration Standard delivery for this calibration standard includes a Factory Calibration. The Calibration Certificate issued reports individual calibration results, traceable to Rosenberger standards, national / international standards are not available. Model based standard definitions are reported in an Agilent/Keysight, Rohde & Schwarz and Anritsu compatible VNA format. Accredited Calibration Not available. For further, more detailed information see application note AN001 on the Rosenberger homepage. Calibration interval Recommendation 12 months Packing Standard Weight 1 pce in box 72 g/pce							
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.							
Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Herbert Babinger	02.12.04	Markus Müller	22.04.16	d00	16-s067	Marcel Panicke	22.04.16
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de			Page 3 / 3