


NOTES:

- ELECTRICAL SPECIFICATIONS:
 CENTER FREQUENCY = 1580±1.5 MHz
 BANDWIDTH: 10.0 MHz MIN @ -10 dB
 BORE SIGHT AXIAL RATIO: 3.0 dB MAX. @ 1580±1.5 MHz
 GAIN: 1.5 dBic MIN
 RETURN LOSS: 15 dB MIN
 RIGHT HAND CIRCULAR POLARIZATION
- SPECIFICATIONS ARE FOR UNPACKAGED ANTENNA.
- FOOTPRINT AND ELECTRICAL SPECIFICATIONS ARE SUBJECT TO CHANGE.
 CONSULT SPECTRUM FSY MICROWAVE FOR SPECIFIC APPLICATIONS.
- TESTING TO BE PERFORMED ON AN ALUMINUM GROUND PLANE,
 1.969 [50MM] X 1.969 [50MM] INCHES, IN FREE SPACE.
- DIMENSIONS IN BRACKETS IN MILLIMETERS.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
0	INITIAL RELEASE PER CN 99852	4/16/01	M.STEGER
1	REDRAWN PER ECN04354, MY, 5/6/04	5/12/04	MI
2	ADD RoHS SYMBOL, ECN 48062	4-30-09	JLK.

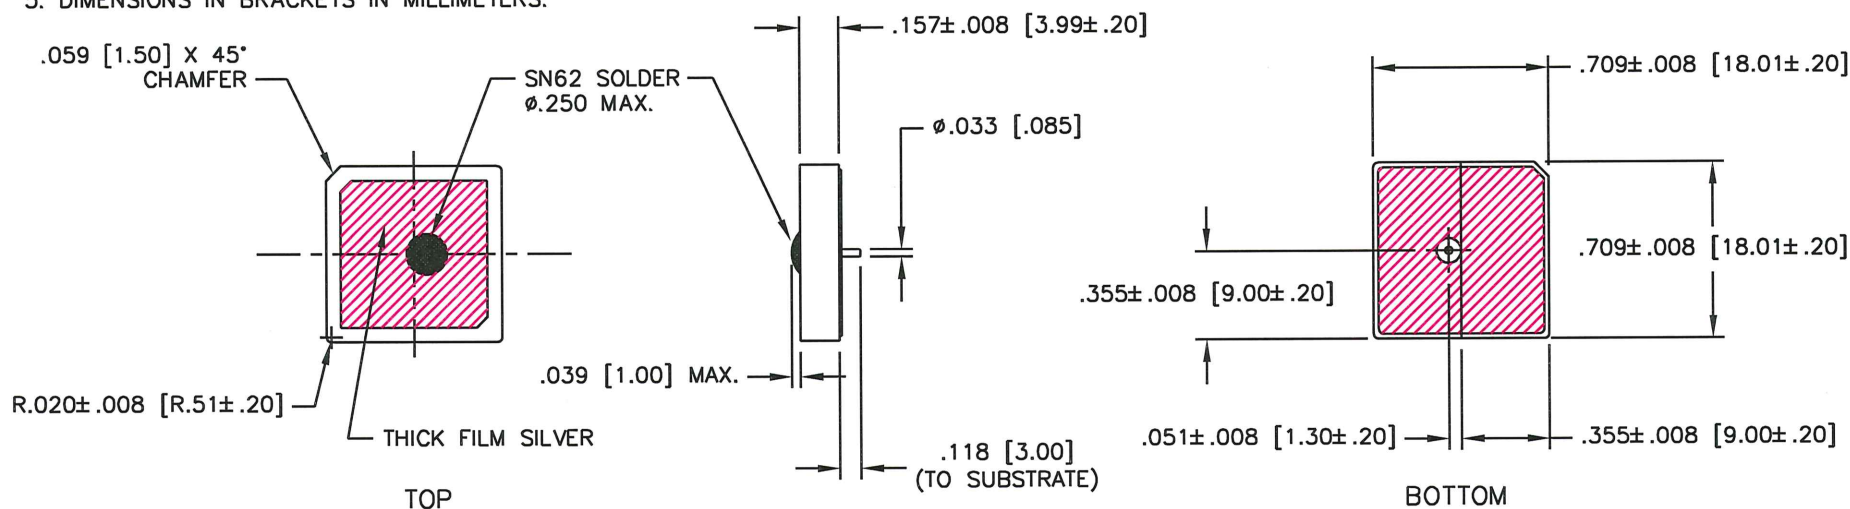

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES
 DIMENSIONS APPLY AFTER PLATING
 INTERPRET DIM. AND TOL. PER
 ASME Y14.5M - 1994
 TOLERANCES:
 .XX±.02 .XXX±.005 ∠±.50°
 BREAK ALL SHARP EDGES AND DEBURR

DRAWN	M. YAKER	5/6/04
CHECKED		
ENGR	C. KIRETA	4-30-09
MAN	-	-
O.C.	-	-
APPROVED		

Spectrum FSY Microwave, Inc.
 COLUMBIA, MARYLAND USA

SALES DRAWING,
 PA18-1580-010SA

All technical information and the design disclosure in this drawing or in any accompanying technical data was originated by and is the property of Spectrum FSY Microwave, Inc. All patent, proprietary, design, manufacturing, reproduction, use and sales rights in any information disclosed herein are reserved by Spectrum FSY Microwave, Inc. No right or license to use any such information for any purpose other than as agreed to by Spectrum FSY Microwave, Inc. is prohibited without written permission of Spectrum FSY Microwave, Inc.

SIZE	CAGE CODE	DRAWING NO.	REV
B	0LSP2	STO-4834	2
SCALE	DO NOT SCALE PRINTS		SHEET 1 OF 1