


ZS Series

SILICON PLANAR ZENER DIODES

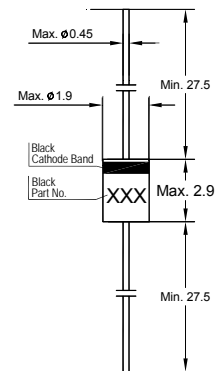

Glass Case DO-34
Dimensions in mm

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Power Dissipation	P_{tot}	400 ¹⁾	mW
Junction Temperature	T_j	175	$^\circ\text{C}$
Storage Temperature Range	T_s	- 65 to + 175	$^\circ\text{C}$

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.

Characteristics at $T_a = 25\text{ }^\circ\text{C}$


Parameter	Symbol	Max.	Unit
Thermal Resistance Junction to Ambient Air	R_{thA}	0.3 ¹⁾	K/mW
Forward Voltage at $I_F = 100\text{ mA}$	V_F	1	V

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Type	Zener Voltage ¹⁾			Maximum Dynamic Resistance		Maximum Reverse Leakage Current	
	Min. (V)	Max. (V)	I_{ZT} (mA)	(Ω) at I_{ZT}	I_{ZT} (mA)	I_R (μA)	V_R (V)
ZS3C-1	3.1	3.3	5	100	5	5	0.5
ZS3C-2	3.2	3.4					
ZS3C-3	3.3	3.5					
ZS33-1	31.2	32.6	2	120	2	1	25
ZS33-2	32.2	33.6					
ZS33-3	33.2	34.6					

¹⁾ Tested with pulses $t_p = 20\text{ ms}$.



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company
listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002 Certificate No. 05103
ISO 14001:2004 Certificate No. 7116
ISO 9001:2000 Certificate No. 0506098

Dated : 25/06/2007