
Vanadium Pentoxide Lithium Coin Batteries (VL Series): Individual Specifications

VL2020

■ Dimensions(mm)

Weight:2.2g

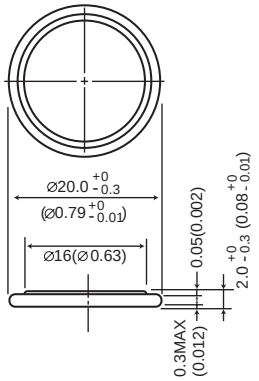


Note: This bare cell diagram is for size reference only. Please refer to the tab configurations at the end of this section for available tabs.


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	20.0
Continuous standard load (mA)	0.07
Operating temperature (C)	-20 ~ +60

■ Discharge Temperature Characteristics

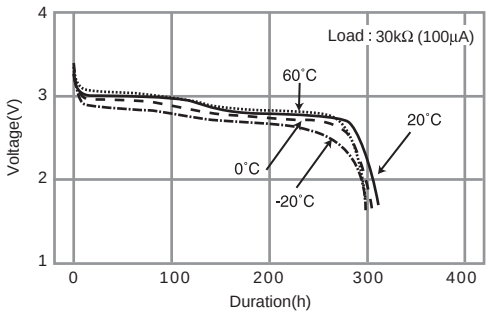


■ Consumption current vs. Duration time

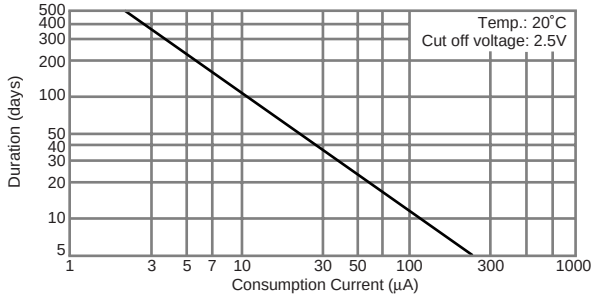

VL2320

■ Dimensions(mm)

Weight:2.7g

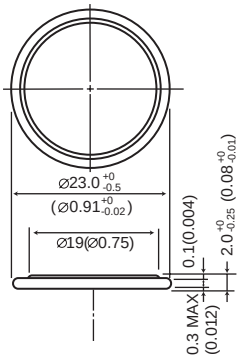


Note: This bare cell diagram is for size reference only. Please refer to the tab configurations at the end of this section for available tabs.


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	30.0
Continuous standard load (mA)	0.1
Operating temperature (C)	-20 ~ +60

■ Discharge Temperature Characteristics

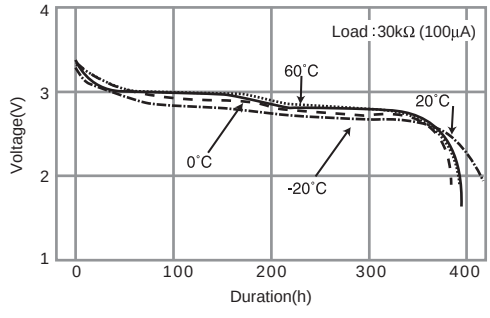

■ Consumption current vs. Duration time

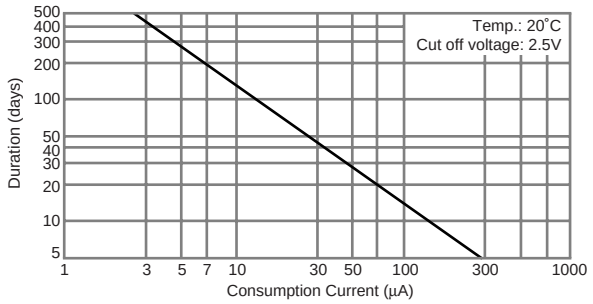

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Panasonic for the latest information.