



1. Mechanical Dimensions:

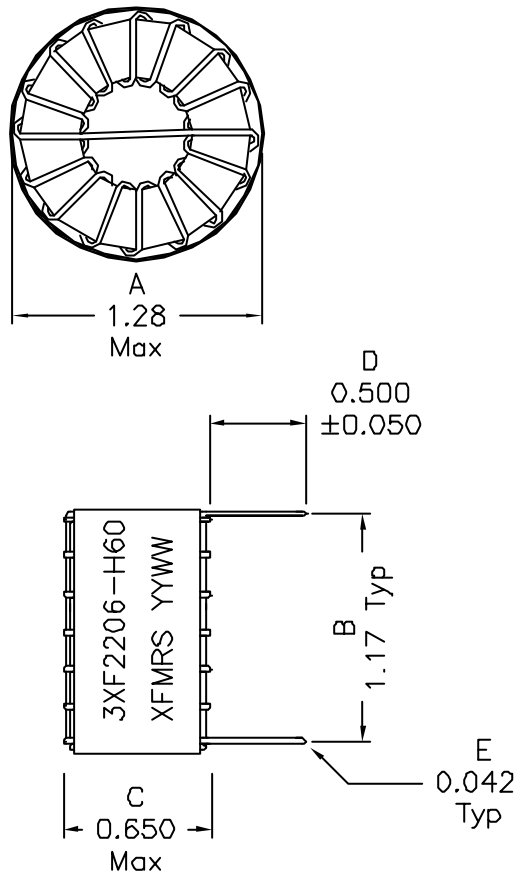

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 220uH±15% @1KHz, 0.1V, 0Adc
 136.6uH±15% @1KHz, 0.1V, 6.8Adc
 Q: 10 Min @100KHz, 0.25V
 DCR: 0.061 Ohms Max

Notes:

- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- Operating Temperature Range: All listed parameters are to be within tolerance from -55°C to +200°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible
- Electrical and mechanical specifications 100% tested
- RoHS Compliant Component

DOC. REV: A/1

| | | | |
|---|------------------|----------------------------------|-----------|
| XFMRs Inc www.XFMRS.com | | Title: HORIZONTAL OPEN TOROID | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.010 Dimensions in Inches | P/N: 3XF2206-H60 | | REV. A |
| | DWN. | Xiany | Feb-05-09 |
| | CHK. | YK Liao | Feb-05-09 |
| SHEET 1 OF 1 | APP. | Joe Huff | Feb-05-09 |