





XKB

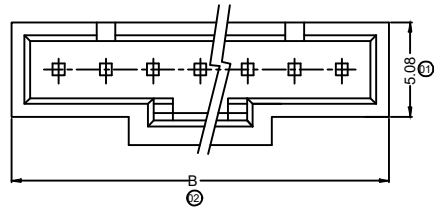


2P




3P

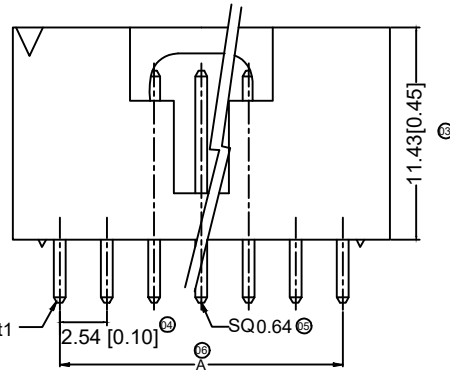



4P-24P



2P



3P



P.C.B LAY OUT

Specifications:

规格: XKB

Voltage rating: 250V AC/DC

额定电压: 250V AC/DC

Current rating: 3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage: 1500V

AC/minute

耐受电压: 1500V AC/分钟

Temperature range: -25°C-+85°C

温度范围: -25°C-+85°C

Insulation resistance: ≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance: ≤20mΩ

接触电阻: ≤20mΩ XKB

After environmental testing: ≤30mΩ

环境测试后: ≤30兆欧

X9556 W V XX- XX X-N0XX XX

(11) Series No. (12) Category : (13) W-wafer (14) Welding Board Angle: V-180° (15) Row No. -Pin No. XX-Single row (16) Special NO. (17) Material: N0 -PA66 94V-0 (18) Planting Category: V**:All Gold-Plated *01-Gold Flash ; *02-2u" ; *03-3u" ; *05-5u" *10-10u" ; *15-15u" ; *30-30u" ; *50-50u" SN-Bright tin plating 70u" SN1-Bright tin plating 120u"Min. ; SW-Fog Tin plating (19) Color: Blank-natural color

Pole s	Dimensions (mm)	
	A	B
2	2.54	7.62
3	5.08	10.16
4	7.62	12.70
5	10.16	15.24
6	12.70	17.78
7	15.24	20.32
8	17.78	22.86
9	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02
13	30.48	35.56
14	33.02	38.10
15	35.56	40.64
16	38.10	43.18
17	40.64	45.72
18	43.18	48.26
19	45.72	50.80
20	48.26	53.34
21	50.80	55.88
22	53.34	58.42
23	55.88	60.96
24	58.42	63.50

X9556WV-XX-N0V15	Nylon 66 UL 94V-0	Brass	Gold-Plated 15u "	X9556H
X9556WV-XX-N0V01	Nylon 66 UL 94V-0	Brass	Gold-Flash	
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal

				XKB	DSND	DATE	SCALE: N/A	MODEL TYPE: X9556WV-XX-N0XX		
ΔX				ANGLAR	DWN	DATE	VIEW:	PART NO.:		
ΔX				L ≤ 4	CHKD	DATE	UNIT: mm/in	2.54 mm Crimp Style Connectors		
ΔX				4 < L ≤ 16	APPD	DATE	SIZE: A4	DWG NO.:		
MARK	DESCRIPTION	DATE	REVISED	APPROVED						
				UNSPECIFIED TOLERANCES	XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT	SHEET	REVISION
				www.helloxkb.com				1.0g	1/1	A0