

# DATA SHEET

PART NO.: L-S110WDT

REV: A / 4

CUSTOMER'S APPROVAL : \_\_\_\_\_

DCC : \_\_\_\_\_

DRAWING NO. : DS-73-06-0010

DATE : 2009-11-26 PAGE


1 of 15

# SURFACE MOUNT DEVICE LED

Part No. : L-S110WDT

REV:A / 4

## ● PACKAGE OUTLINE DIMENSIONS

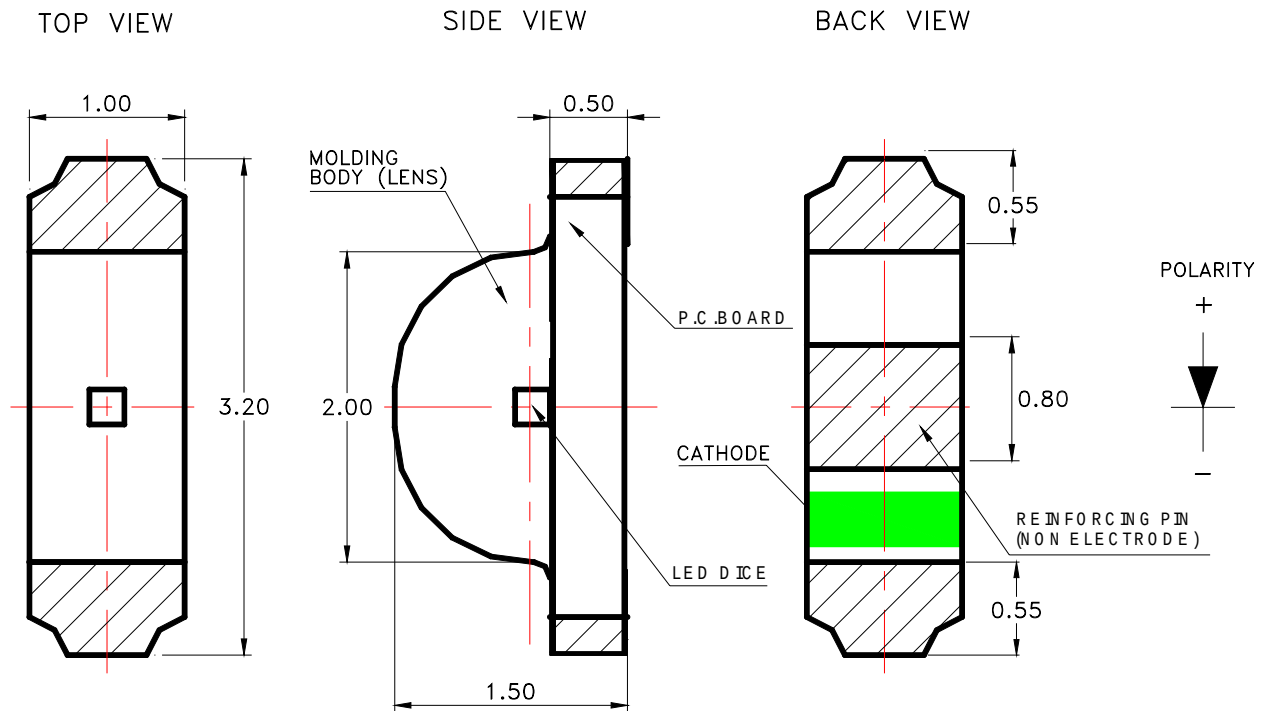

### Notes:

1. All dimensions are in millimeters.
2. Tolerance is  $\pm 0.1\text{mm}$  (.004") unless otherwise noted.

## ● Features

- \* Wide view angle, White color SMD chip LED .
- \* Compatible with automatic Pick & Place equipment.
- \* Compatible with Reflow soldering and Wave soldering processes.
- \* EIA STD package.(ANSI/EIA-481-B-2001)
- \* I.C. compatible, low current application
- \* Pb free product and acceptable lead-free process!.
- \* RoHS compliant version.

## ● Application

- \* LCD back light
- \* Switch back lights
- \* Illuminations.

# SURFACE MOUNT DEVICE LED

Part No. : L-S110WDT

REV:A / 4

## ● CHIP MATERIALS

- \* Dice Material : InGaN
- \* Light Color : White
- \* Lens Color : Light Yellow Diffused.

## ● Absolute Maximum Ratings(Ta=25°C)

| Symbol          | Parameter                                                    | Rating    | Unit  |
|-----------------|--------------------------------------------------------------|-----------|-------|
| P <sub>D</sub>  | Power Dissipation                                            | 100       | mW    |
| I <sub>PF</sub> | Peak Forward Current<br>(1/10 Duty Cycle, 0.1ms Pulse Width) | 100       | mA    |
| I <sub>F</sub>  | Continuous Forward Current                                   | 25        | mA    |
| -               | De-rating Linear From 25°C                                   | 0.25      | mA/°C |
| V <sub>R</sub>  | Reverse Voltage                                              | 5         | V     |
| ESD             | Electrostatic Discharge Threshold(HBM) <sup>Note A</sup>     | 2000      | V     |
| Topr            | Operating Temperature Range                                  | -40 ~ +85 | °C    |
| Tstg            | Storage Temperature Range                                    | -40 ~ +85 | °C    |

Note A :

HBM : Human Body Model. Seller gives no other assurances regarding the ability of to withstand ESD.

## ● Electro-Optical Characteristics(Ta=25°C)

| Parameter          | Symbol         | Min. | Typ. | Max. | Unit  | Test Condition        |
|--------------------|----------------|------|------|------|-------|-----------------------|
| Luminous Intensity | I <sub>V</sub> | 100  | 300  |      | mcd   | I <sub>F</sub> =20mA  |
| Radiant Intensity  | L <sub>m</sub> | 0.14 | 0.28 |      | mw/sr |                       |
| Viewing Angle      | 2 θ 1/2        |      | 130  |      | Deg   | Note 2                |
| CIE Chromaticity   | X              |      | 0.30 |      |       | I <sub>F</sub> =20mA  |
| CIE Chromaticity   | Y              |      | 0.30 |      |       |                       |
| Forward Voltage    | V <sub>F</sub> |      | 3.2  | 3.50 | V     | I <sub>F</sub> = 20mA |
| Reverse Current    | I <sub>R</sub> |      |      | 50   | μ A   | V <sub>R</sub> = 5V   |

# SURFACE MOUNT DEVICE LED

Part No. : L-S110WDT

REV:A / 4

## Notes:

1. Luminous intensity is measured with a light sensor and filter combination that proximities the CIE eye-response curve.
2.  $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
3. The dominant wavelength  $\lambda_d$  is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
4. Caution in ESD :  
Static Electricity and surge damages the LED. It is recommended use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.
5. Major standard testing equipment by “Instrument System” Model : CAS140B Compact Array Spectrometer and “KEITHLEY” Source Meter Model : 2400.

## ● Typical Electro-Optical Characteristics Curves

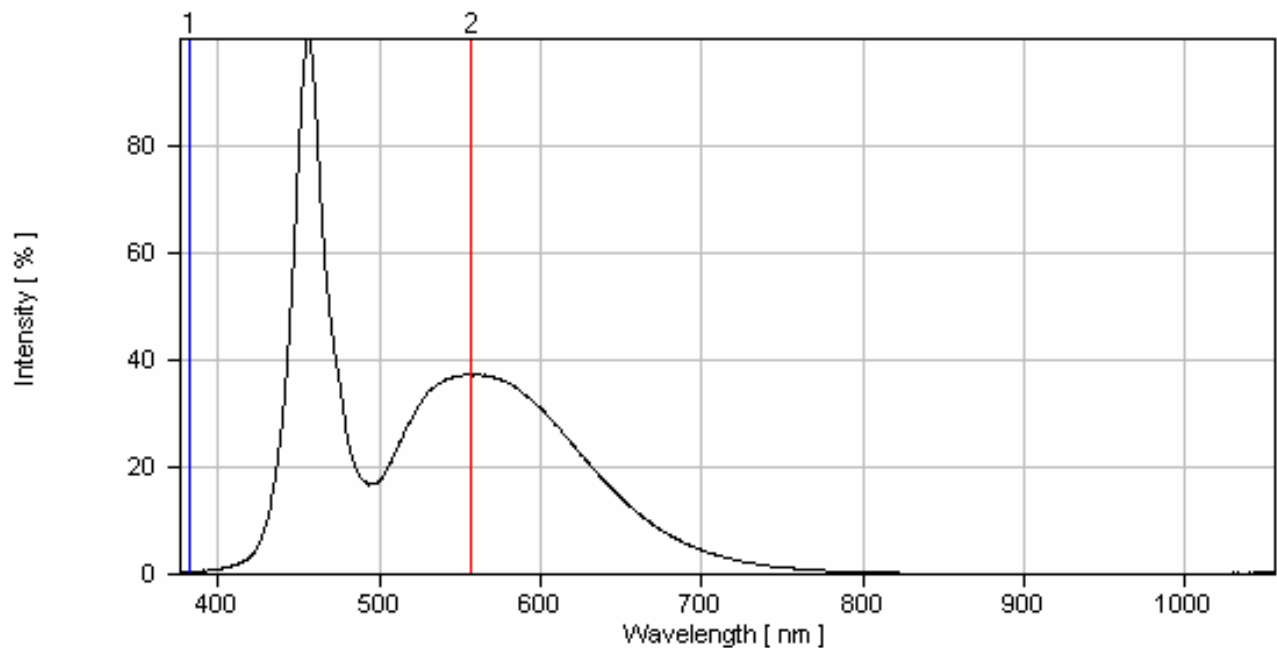


Fig.1 Relative Intensity vs. Wavelength

# SURFACE MOUNT DEVICE LED

Part No. : L-S110WDT

REV:A / 4

## ● Typical Electro-Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

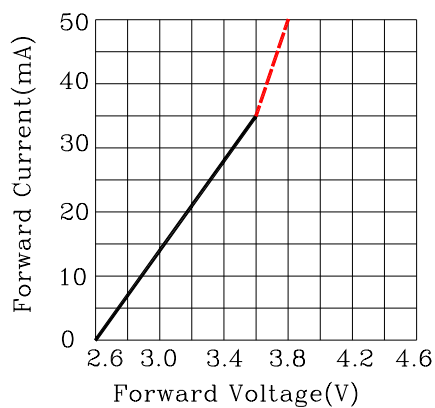


Fig.1 Forward Current vs. Forward Voltage

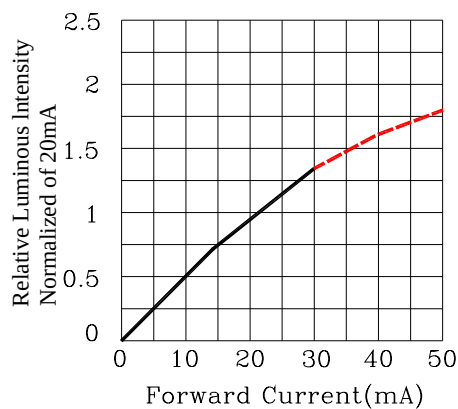


Fig.2 Relative Luminous Intensity vs. Forward Current

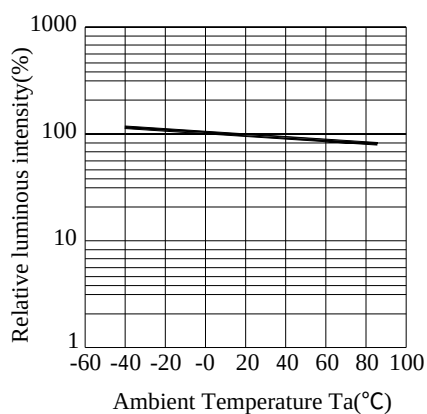


Fig.3 Luminous Intensity vs. Ambient Temperature

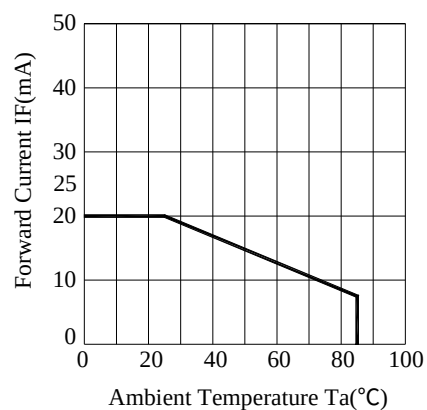


Fig.4 Forward Current Derating Curve

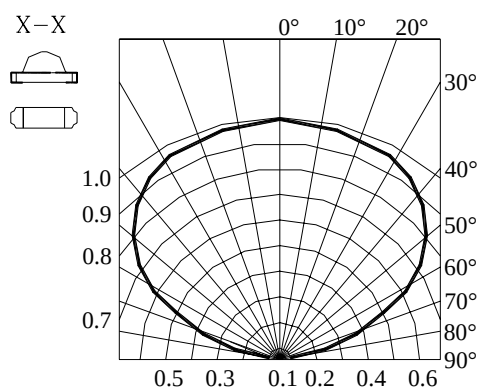


Fig.5 Relative Intensity vs. Angle

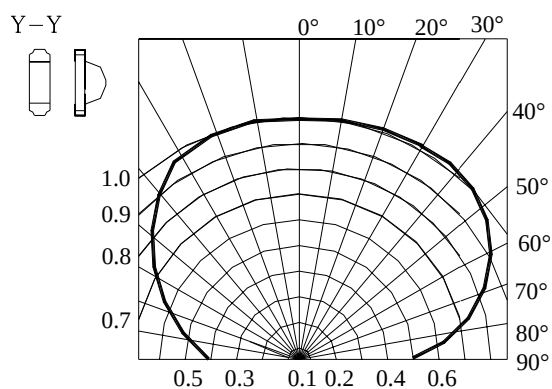


Fig.6 Relative Intensity vs. Angle

# SURFACE MOUNT DEVICE LED

Part No. : L-S110WDT

REV:A / 4

## ● Label Explanation

CUS.PART NO: PARA

CUSTOMER: C

PART ON: P



LOT NO: L BIN BATCH: L1B9AC



QUANTITY: Q



DATE CODE: D QC:



CUS. PART NO: To be denominated.

CUSTOMER: To be denominated.

PART NO: Refer to P15

IV --- Luminous Intensity Code

VF --- Forward Voltage Code

WD --- Dominant Wavelength Code

LOT NO: E L S 6 8 0001  
A B C D E F

A---E: For series number

B---L: Local F: Foreign

C---S:SMD

D---Year

E---Month

F---SPEC.

PACKING QUANTITY OF BAG :

3000pcs max for 150、170、110、115 series

4000pcs max for 191 series

5000pcs max for 192 series

DATE CODE : 2006 06 08  
G H I

G--- Year

H--- Month


I --- Day

# SURFACE MOUNT DEVICE LED

Part No. : L-S110WDT

REV:A / 4

## ● Reel Dimensions

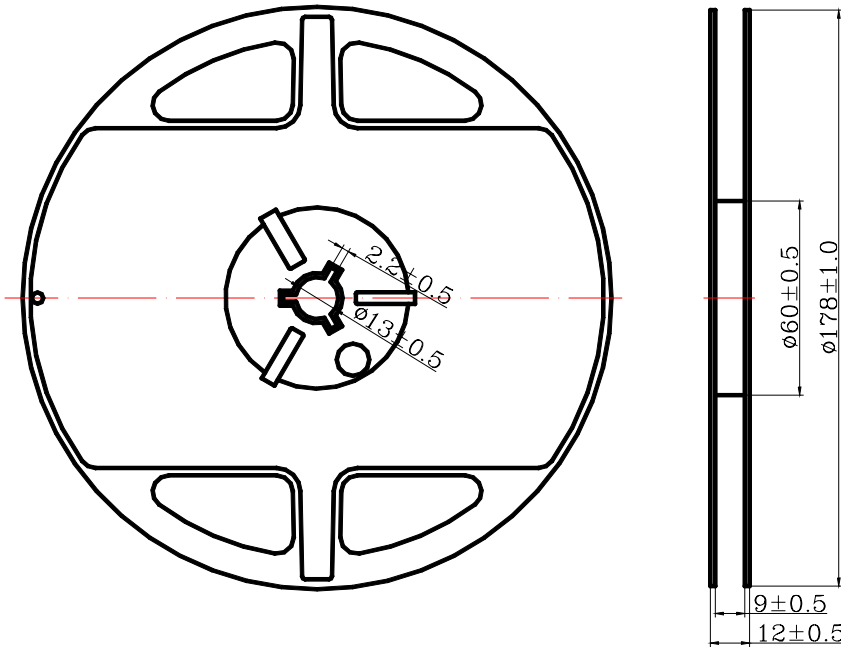

### Notes:


1. Taping Quantity : 3000pcs (Minimum packing quantity will be 500 pcs for remainders)
2. The tolerances unless mentioned is  $\pm 0.1$  mm, Angle  $\pm 0.5^\circ$ , Unit : mm.

# SURFACE MOUNT DEVICE LED

Part No. : L-S110WDT


REV:A / 4

## ● Package Dimensions Of Tape And Reel

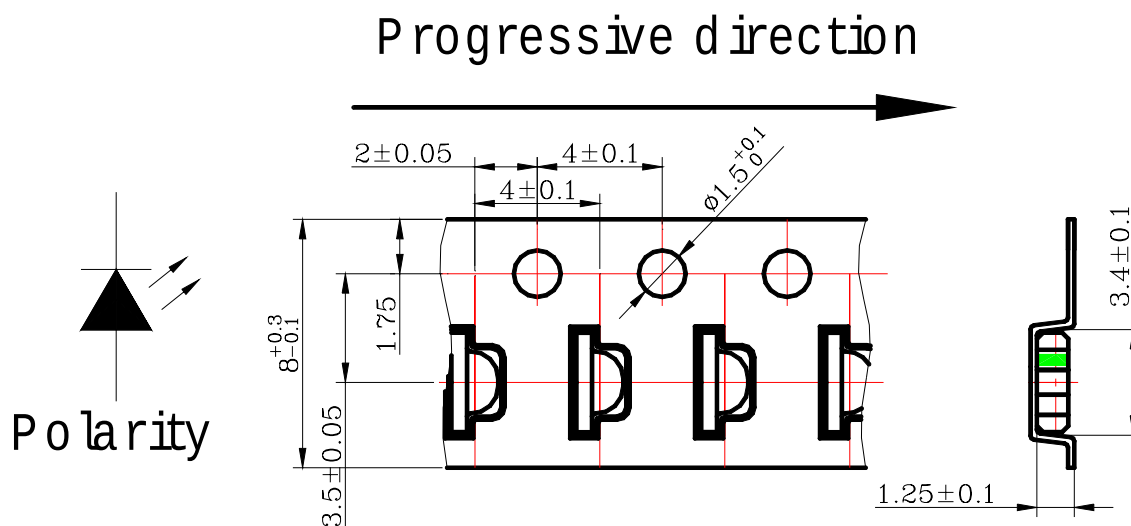

Notes: All dimensions are in millimeters.

## Moisture Resistant Packaging

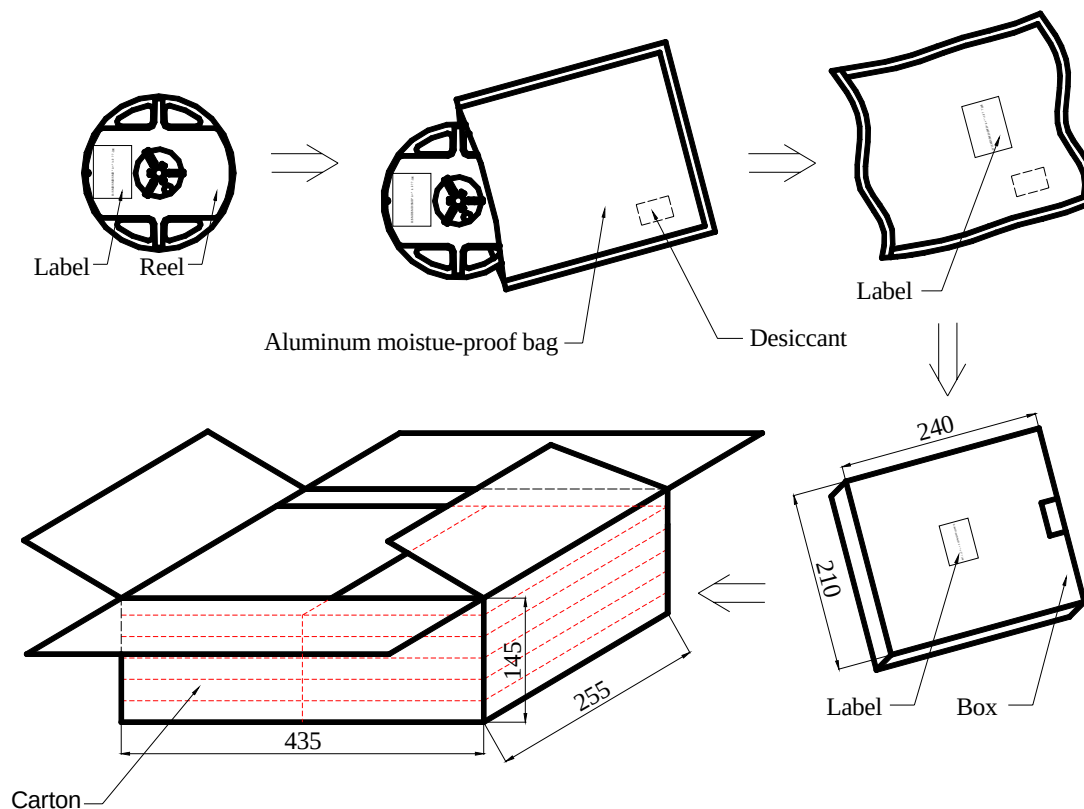

Notes : One reel in a bag, one bag in a inner box, ten inner boxes in a carton. Unit : mm.

# SURFACE MOUNT DEVICE LED


Part No. : L-S110WDT

REV:A / 4

## ● Cleaning

- \* If cleaning is required , use the following solutions for less than 1 minute and less than 40°C.
- \* Appropriate chemicals: Ethyl alcohol and isopropyl alcohol.
- \* Effect of ultrasonic cleaning on the LED resin body differs depending on such factors as the oscillator output, size of PCB and LED mounting method. The use of ultrasonic cleaning should be enforced at proper output after confirming there is no problem.

## ● Suggest Soldering Pad Dimensions

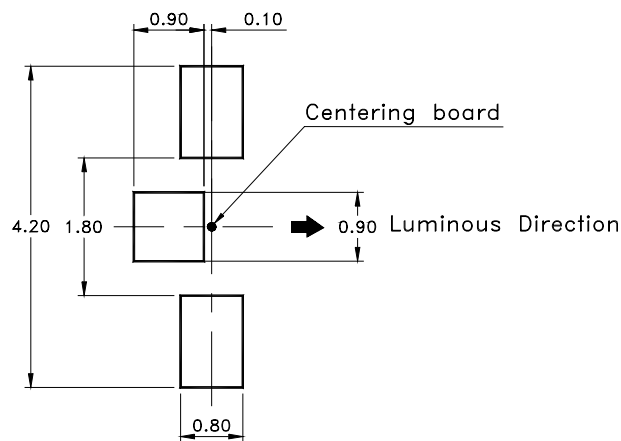


Direction of PWB camber  
and go to reflow furnace

# SURFACE MOUNT DEVICE LED


Part No. : L-S110WDT

REV:A / 4

## ● Suggest Sn/Pb IR Reflow Soldering Profile Condition:

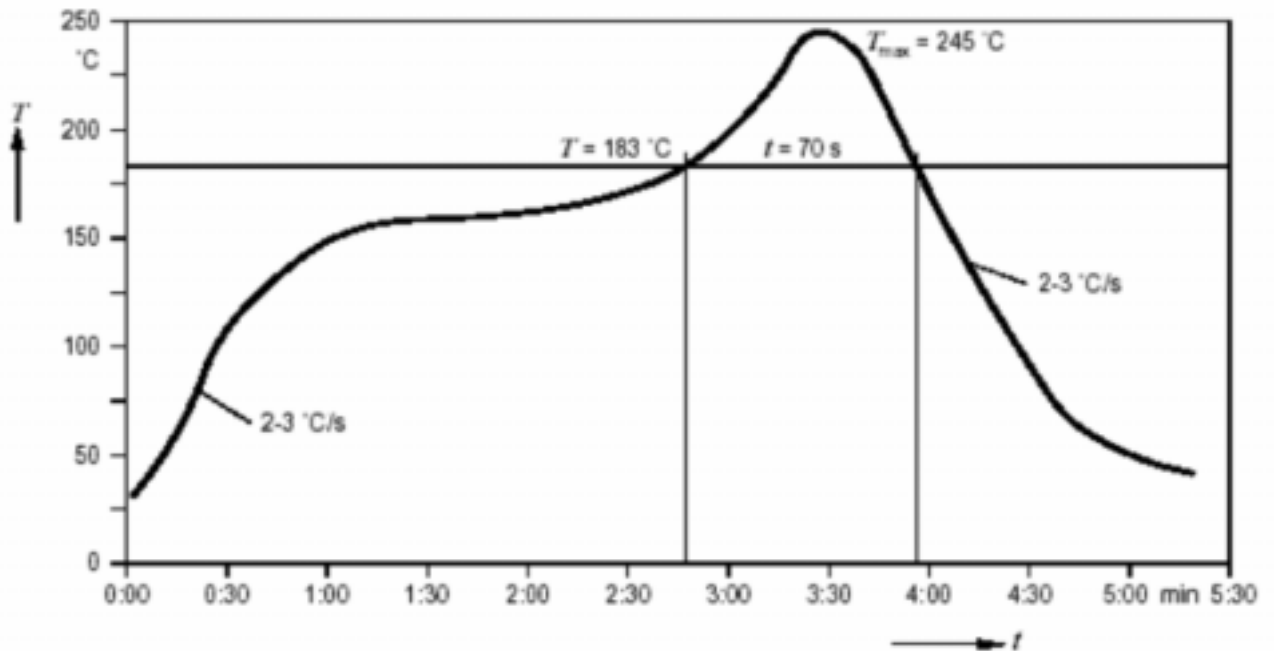

## ● Suggest Pb-Free IR Reflow Soldering Profile Condition:

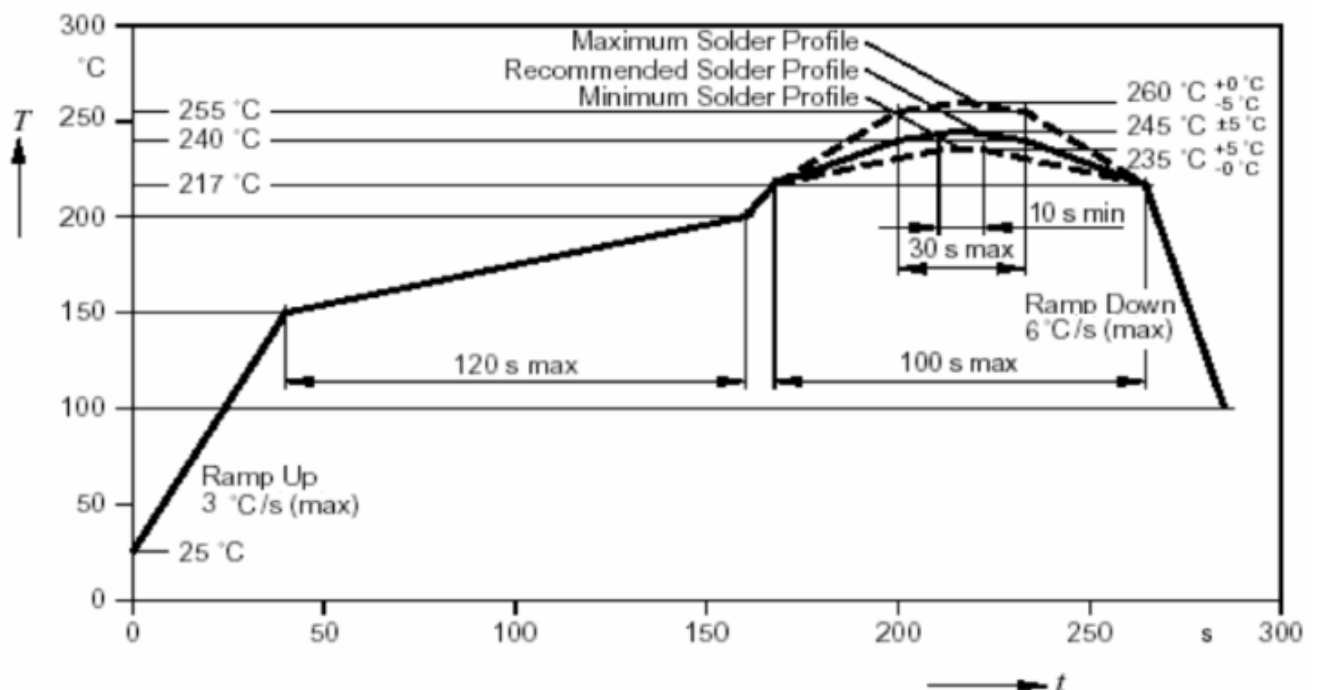

# SURFACE MOUNT DEVICE LED

Part No. : L-S110WDT

REV:A / 4

## ● Bin Code List

| Luminous Intensity(IV), Unit:mcd@20mA |       |       |
|---------------------------------------|-------|-------|
| Bin Code                              | Min   | Max   |
| R                                     | 112.0 | 180.0 |
| S                                     | 180.0 | 280.0 |
| T                                     | 280.0 | 450.0 |
|                                       |       |       |

| Forward Voltage(VF), Unit:V@20mA |      |      |
|----------------------------------|------|------|
| Bin Code                         | Min  | Max  |
| K8                               | 2.80 | 2.95 |
| K9                               | 2.95 | 3.10 |
| K10                              | 3.10 | 3.25 |
| K11                              | 3.25 | 3.40 |


Tolerance of each bin are  $\pm 10\%$

Tolerance of each bin are  $\pm 0.1\text{V}$

| Color Rank (CIE chromaticity X , Y) @ 20mA |       |       |       |       |         |       |       |       |       |
|--------------------------------------------|-------|-------|-------|-------|---------|-------|-------|-------|-------|
| Rank W1                                    |       |       |       |       | Rank W2 |       |       |       |       |
| X                                          | 0.280 | 0.264 | 0.283 | 0.296 | X       | 0.287 | 0.283 | 0.330 | 0.330 |
| Y                                          | 0.248 | 0.267 | 0.305 | 0.276 | Y       | 0.295 | 0.305 | 0.360 | 0.339 |
| Rank W3                                    |       |       |       |       | Rank W4 |       |       |       |       |
| X                                          | 0.296 | 0.287 | 0.330 | 0.330 | X       | 0.330 | 0.330 | 0.361 | 0.356 |
| Y                                          | 0.276 | 0.295 | 0.339 | 0.318 | Y       | 0.318 | 0.360 | 0.385 | 0.351 |

※ Measurement of Color coordinates :  $\pm 0.02$

## C.I.E. Chromaticity Diagram

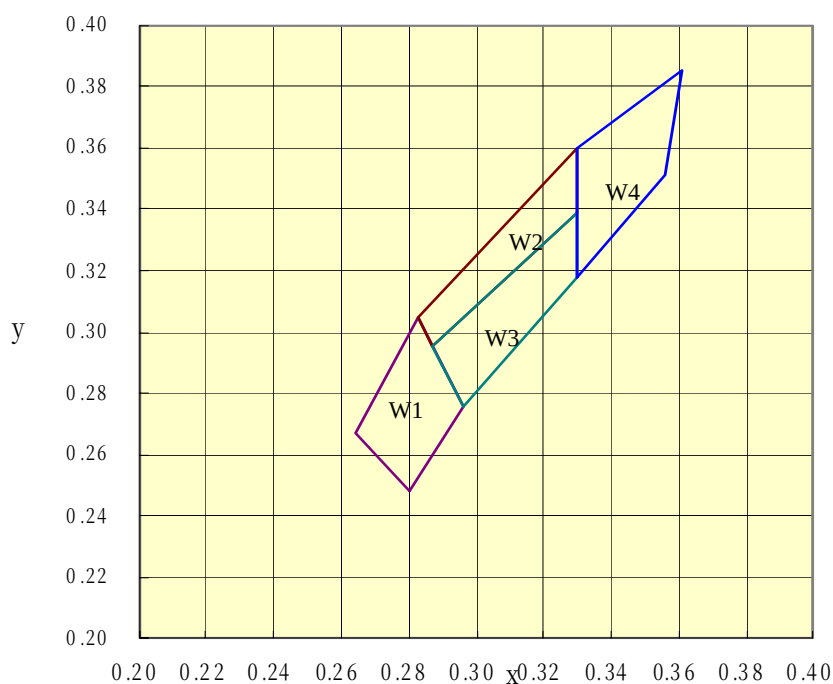

# SURFACE MOUNT DEVICE LED

Part No. : L-S110WDT

REV:A / 4

## ● CAUTIONS

### 1.Application Limitation :

The LED's described here are intended to be used for ordinary electronic equipment (such as office equipment, communication equipment and household application).Consult PARA's sales in advance for information on application in which exceptional quality and reliability are required, particularly when the failure or malfunction of the LED's may directly jeopardize life or health (such as airplanes, automobiles, traffic control equipment, life support system and safety devices).

### 2.Storage :

Before opening the package :

The LEDs should be store kept at 5°C to 30°C or less and 85%RH or less.

After opening the package :

The LEDs should be kept at 5°C to 30°C or less and 70%RH or less. The LEDs should be soldered within 168 hours(7 days) after opening the package.

Please avoid rapid transitions in ambient temperature in high humidity environments where condensation may occur.

LEDs stored out of their original packaging for more than a week should be baked at 30°C for at 24 hours before solder assembly.

### 3.Soldering

Do not apply any stress to the lead frame during soldering while the LED is at high temperature.

Recommended soldering condition.

Reflow Soldering :

Pre-heat 120~150°C, 120sec. MAX., Peak temperature : 240°C Max. Soldering time : 10 sec Max.

Soldering Iron : (Not recommended)

Temperature 300°C Max., Soldering time : 3 sec. Max.(one time only), power dissipation of iron : 20W Max. use SN60 solder of solder with silver content and don't to touch LED lens when soldering.

Wave soldering :

Pre-heat 100°C Max, Pre-heat time 60 sec. Max, Solder wave 260°C Max, Soldering time 5 sec. Max. preformed consecutively cooling process is required between 1st and 2nd soldering processes.

# SURFACE MOUNT DEVICE LED

Part No. : L-S110WDT

REV:A / 4

## 4. Lead-Free Soldering

For Reflow Soldering :

- 1、Pre-Heat Temp:150-180°C,120sec.Max.
- 2、Soldering Temp:Temperature Of Soldering Pot Over 230°C,40sec.Max.
- 3、Peak Temperature:260°C, 5sec.
- 4、Reflow Repetition:2 Times Max.
- 5、Suggest Solder Paste Formula 93.3 Sn/3.1 Ag/3.1 Bi /0.5 Cu

For Soldering Iron (Not Recommended) :


- 1、Iron Tip Temp:350°C Max.
- 2、Soldering Iron:30w Max.
- 3、Soldering Time:3 Sec. Max. One Time.

For Dip Soldering :


- 1、Pre-Heat Temp:150°C Max. 120 Sec. Max.
- 2、Bath Temp:265°C Max.
- 3、Dip Time:5 Sec. Max.

## 5. Drive Method

Circuit model A

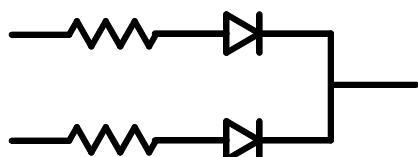

Circuit model B

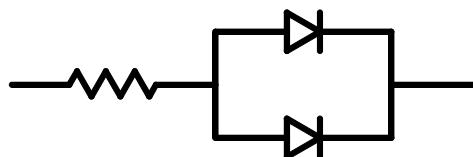

(A)Recommended circuit.

(B)The difference of brightness between LEDs could be found due to the Vf-If characteristics of LED.

# SURFACE MOUNT DEVICE LED

Part No. : L-S110WDT

REV:A / 4

## 6. Reliability Test

| Classification     | Test Item                              | Test Condition                                                                                                     | Reference Standard                                                                                                        |
|--------------------|----------------------------------------|--------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Endurance Test     | Operation Life                         | Ta= Under Room Temperature As Per Data Sheet Maximum Rating<br>*Test Time= 1000HRS<br>(-24HRS,+72HRS)*@20mA.       | MIL-STD-750D:1026 (1995)<br>MIL-STD-883D:1005 (1991)<br>JIS C 7021:B-1 (1982)                                             |
|                    | High Temperature High Humidity Storage | IR-Reflow In-Board, 2 Times<br>Ta= 65±5°C, RH= 90~95%<br>*Test Time= 1000HRS±2HRS                                  | MIL-STD-202F:103B(1980)<br>JIS C 7021:B-11(1982)                                                                          |
|                    | High Temperature Storage               | Ta= 105±5°C<br>Test Time= 1000HRS (-24HRS,72HRS)                                                                   | MIL-STD-883D:1008 (1991)<br>JIS C 7021:B-10 (1982)                                                                        |
|                    | Low Temperature Storage                | Ta= -55±5°C<br>*Test Time=1000HRS (-24HRS,72H RS)                                                                  | JIS C 7021:B-12 (1982)                                                                                                    |
| Environmental Test | Temperature Cycling                    | 105±5°C      -55±5°C<br>10mins      10mins      100 Cycles                                                         | MIL-STD-202F:107D (1980)<br>MIL-STD-750D:1051(1995)<br>MIL-STD-883D:1010 (1991)<br>JIS C 7021:A-4(1982)                   |
|                    | Thermal Shock                          | IR-Reflow In-Board, 2 Times<br>105±5°C      -55°C±5°C<br>10mins      10mins      100 Cycles                        | MIL-STD-202F:107D(1980)<br>MIL-STD-750D:1051(1995)<br>MIL-STD-883D:1011 (1991)                                            |
|                    | Solder Resistance                      | Tsol= 260 ± 5°C<br>Dwell Time= 10 ± 1sec                                                                           | MIL-STD-202F:210A(1980)<br>MIL-STD-750D:2031(1995)<br>JIS C 7021:A-1(1982)                                                |
|                    | Solder ability                         | Tsol= 235 ± 5°C<br>Immersion time 2±0.5 sec<br>Immersion rate 25±2.5 mm/sec<br>Coverage ≥95% of the dipped surface | MIL-STD-202F:208D(1980)<br>MIL-STD-750D:2026(1995)<br>MIL-STD-883D:2003(1991)<br>IEC 68 Part 2-20<br>JIS C 7021:A-2(1982) |

## 7. Others:

The appearance and specifications of the product may be modified for improvement without notice.

# SURFACE MOUNT DEVICE LED

Part No. : L-S110WDT

REV:A / 4

● PART NO. SYSTEM :

L - S 1 1 0 X C X X - X X X X

XXXX : Special specification for customer

T : Taping for 7 inch reel  
TC : Taping for 13 inch reel  
TH : IV half binning  
TP : Wavelength binning

Lens color  
C : Water Clear  
W : White Diffused  
T : Color Transparent  
D : Color Diffused

G : Gap 570nm Green  
Y : GaAsp 585 nm Yellow  
E : GaAsp 620 nm Orange  
SR : GaAlAs 634 nm Red  
KG : AlInGap 570nm Super Green  
KY : AlInGap 590nm Super Yellow  
KF : AlInGap 605nm Super Amber  
KR : AlInGap 630 nm Super Red  
LB/TB : InGaN 470nm Blue  
LG : InGaN 525nm Green.....

0 : Single chip  
1/2 : Super thin single chip  
5/6 : Dual chip  
F : Three chip(Full color)

150 : 1206 1.1T Type  
170 : 0805 0.8T Type  
191 : 0603 0.6T Type  
192 : 0603 0.4T Type  
110 : 1206 1.0T Type

C : Top View Type  
S : Side View Type