
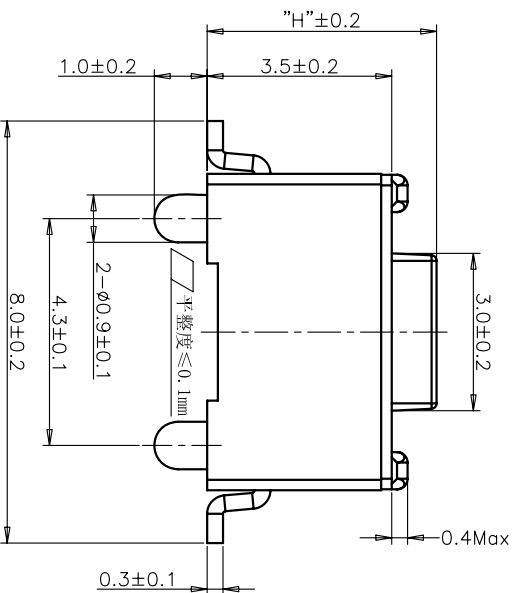


安装尺寸图

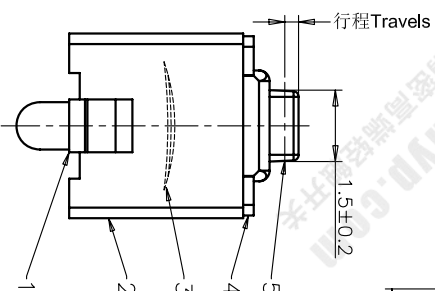

规格 Specifications

额定负荷 Rating	DC 12V/50mA
接触电阻 Contact Resistance	100mΩ max.
绝缘电阻 Insulation resistance	DC100V 60S 100MΩ min.
抗电强度 Dielectric strength	AC250V(50-60HZ) 60S min.
操作力 Operation force	≤180±30gf ≤300±50gf
寿命试验 Operating Life	50,000 cycles 30,000 cycles
行程 Travels	0.25±0.1mm

REV	ECN NO.	APPD
A	HC-11-0027	PROJOM
B	HC-11-0062	PROJOM
C	HC-12-0061	PROJOM
D	HC-15-0064	PROJOM

PRODUCT NO.: 1TS002*****-CT

轻触开关
3X6系列
外形:
A=插脚
B=贴片
C=贴片带柱
E=贴片2.5高
K=贴片带柱8.8
L=贴片10.2

按钮颜色:
底座颜色:
盖板颜色:

操作力度:

手感:

产品高度(H):

材质:

非编带, 不启用

材料:
0=PA66
1=LCP+PPA
2=LCP
3=PA66+PPA
4=新增材质
依次增加

初始颜色
则不启用

0=常规
1=大手感
2=小手感
3=特殊手感

130=130±20gf
160=160±30gf
180=180±30gf
220=220±40gf
250=250±50gf
300=300±50gf

430=4.3mm
500=5.0mm

5

ITEM	PART NAME	QUANTITY	MATERIAL	FINISH
5	ACTUATOR	1	PAG6	WHITE
4	COVER	1	STAINLESS STEEL	NATURAL
3	DOME	1	STAINLESS STEEL	Ag-PLATED
2	HOUSING	1	PAG6	WHITE
1	TERMINAL	1	BRASS	Ag-PLATED/0.2µm

X. ±	0.3	X' ±	3'
.X ±	0.2	X' ±	2'
.XX ±	0.1	.XX' ±	1'
.XXX ±	0.05	.XXX' ±	0.5'

NAME(INTENDED USE)	HON YUAN
3X6 SMT SERIES(POST)	HON YUAN PRECISION IND. CO.,LTD.
TACT SWITCH	SHENZHEN, CHINA.
TITLE:	PRODUCT DRAWING
APPD:	ZO 2015/11/12
CHKD:	M.H.LI 2015/11/12
DR:	WP.LU 2015/11/11
DWG NO.:	1TS002C

SCALE	SHEET	REV.
10/1	1/4	D

5