

REV.	ECN. NO.	NAME	DATE

NOTES:

MATERIAL:

CAGE: NICKEL SILVER

CONNECTOR:

PLASTIC HOUSING: HIGH TEMPERATURE LCP, UL94 V-0.

LIGHT PIPE: POLYCARBONATE; COLOR: CLEAR






SPRING: STAINLESS STEEL

CONTACTS: PHOSPHOR BRONZE

CONTACT PLATING: 15u" MIN. GOLD ON MATING AREA,
150u" MATTE TIN ON SOLDER TAILS

PACKAGING: TRAY PACKAGING.

TEMPERATURE RANGE: -40°C TO +85°C

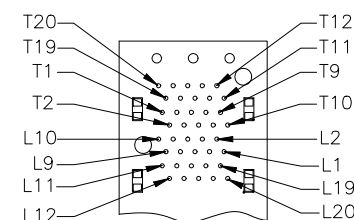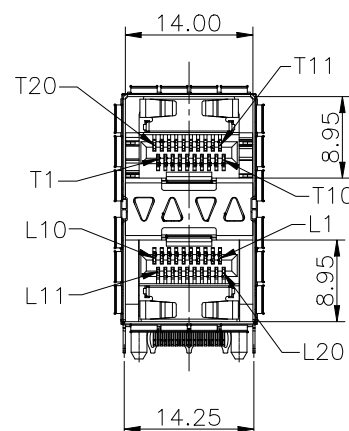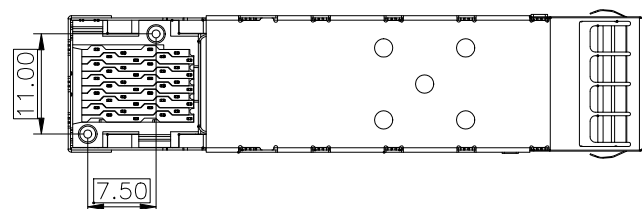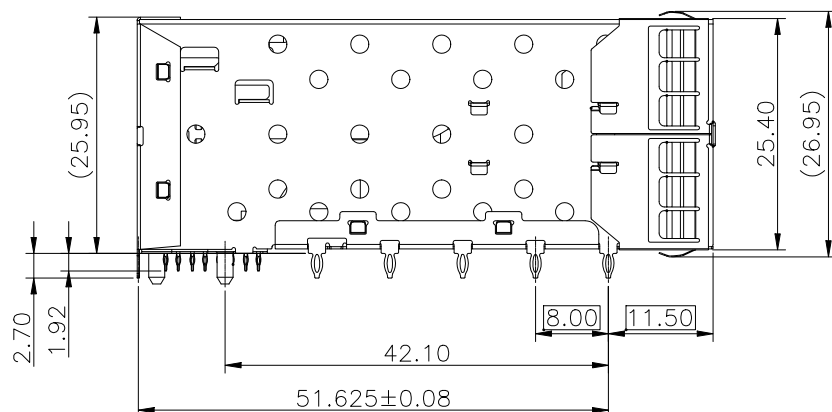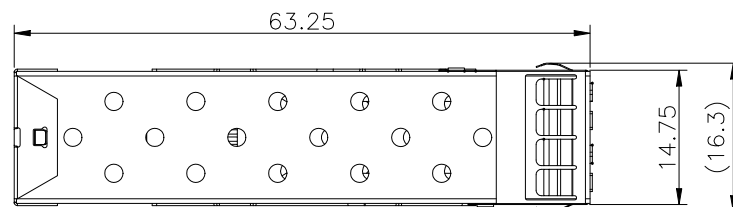


CONNECTOR PIN-OUT
COMPONENT SIDE OF BOARD

RoHS Compliant

TOLERANCE UNSPECIFIED		VITALCON a vital connector company		FOR YOUR VITAL CONNECTION	
.0	± 0.38			TITLE: SFP+2*1CAGE+ CONN	
.00	± 0.25	DRAWN BY: BECKER		PART NO: SN212	
.000	± 0.10	CHECKED BY: VTA		UNIT:mm	
ANGLE	± 3.00°	APPROVED BY: QPF		SHEET:10F3	
MANUFACTURING COPY		PROJECTION		http://www.vitalconn.com	
				REV: A	
				FCN: A4	


REV.	ECN. NO.	NAME	DATE

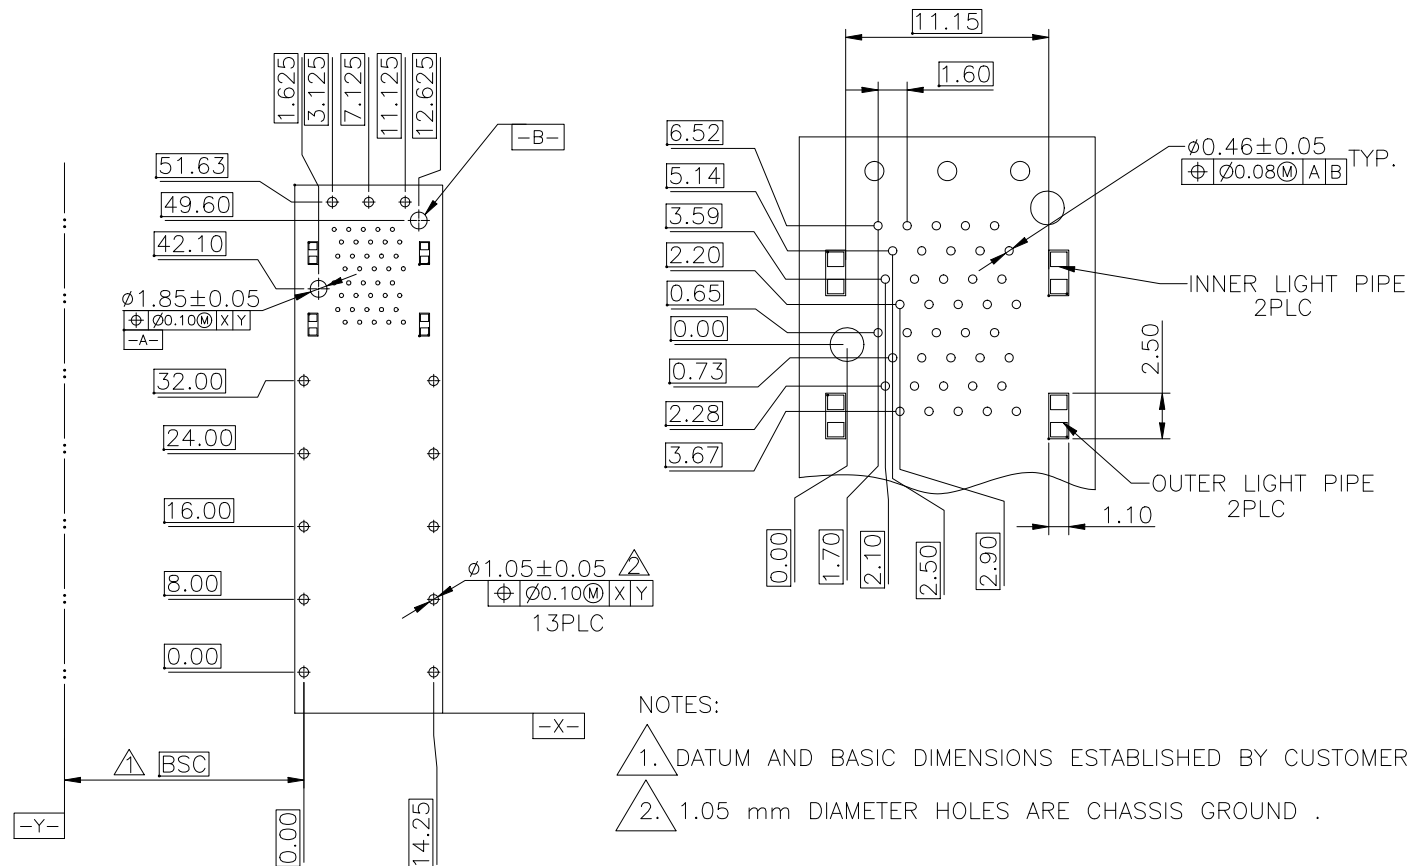

RECOMMENDED PCB CONFIGURATION

RoHS Compliant

TOLERANCE UNSPECIFIED				FOR YOUR	
.0	± 0.38			VITAL CONNECTION	
.00	± 0.25	TITLE: SFP+2*1CAGE+ CONN			
.000	± 0.10				
ANGLE	± 3.00°				
MANUFACTURING COPY					
DRAWN BY:	BECKER	PART NO:	SN212		REV: A
CHECKED BY:	VTA	SIZE: A4	UNIT:mm	SHEET:2OF3	FCN: A4
APPROVED BY:	QPF	PROJECTION		http://www.vitalconn.com	

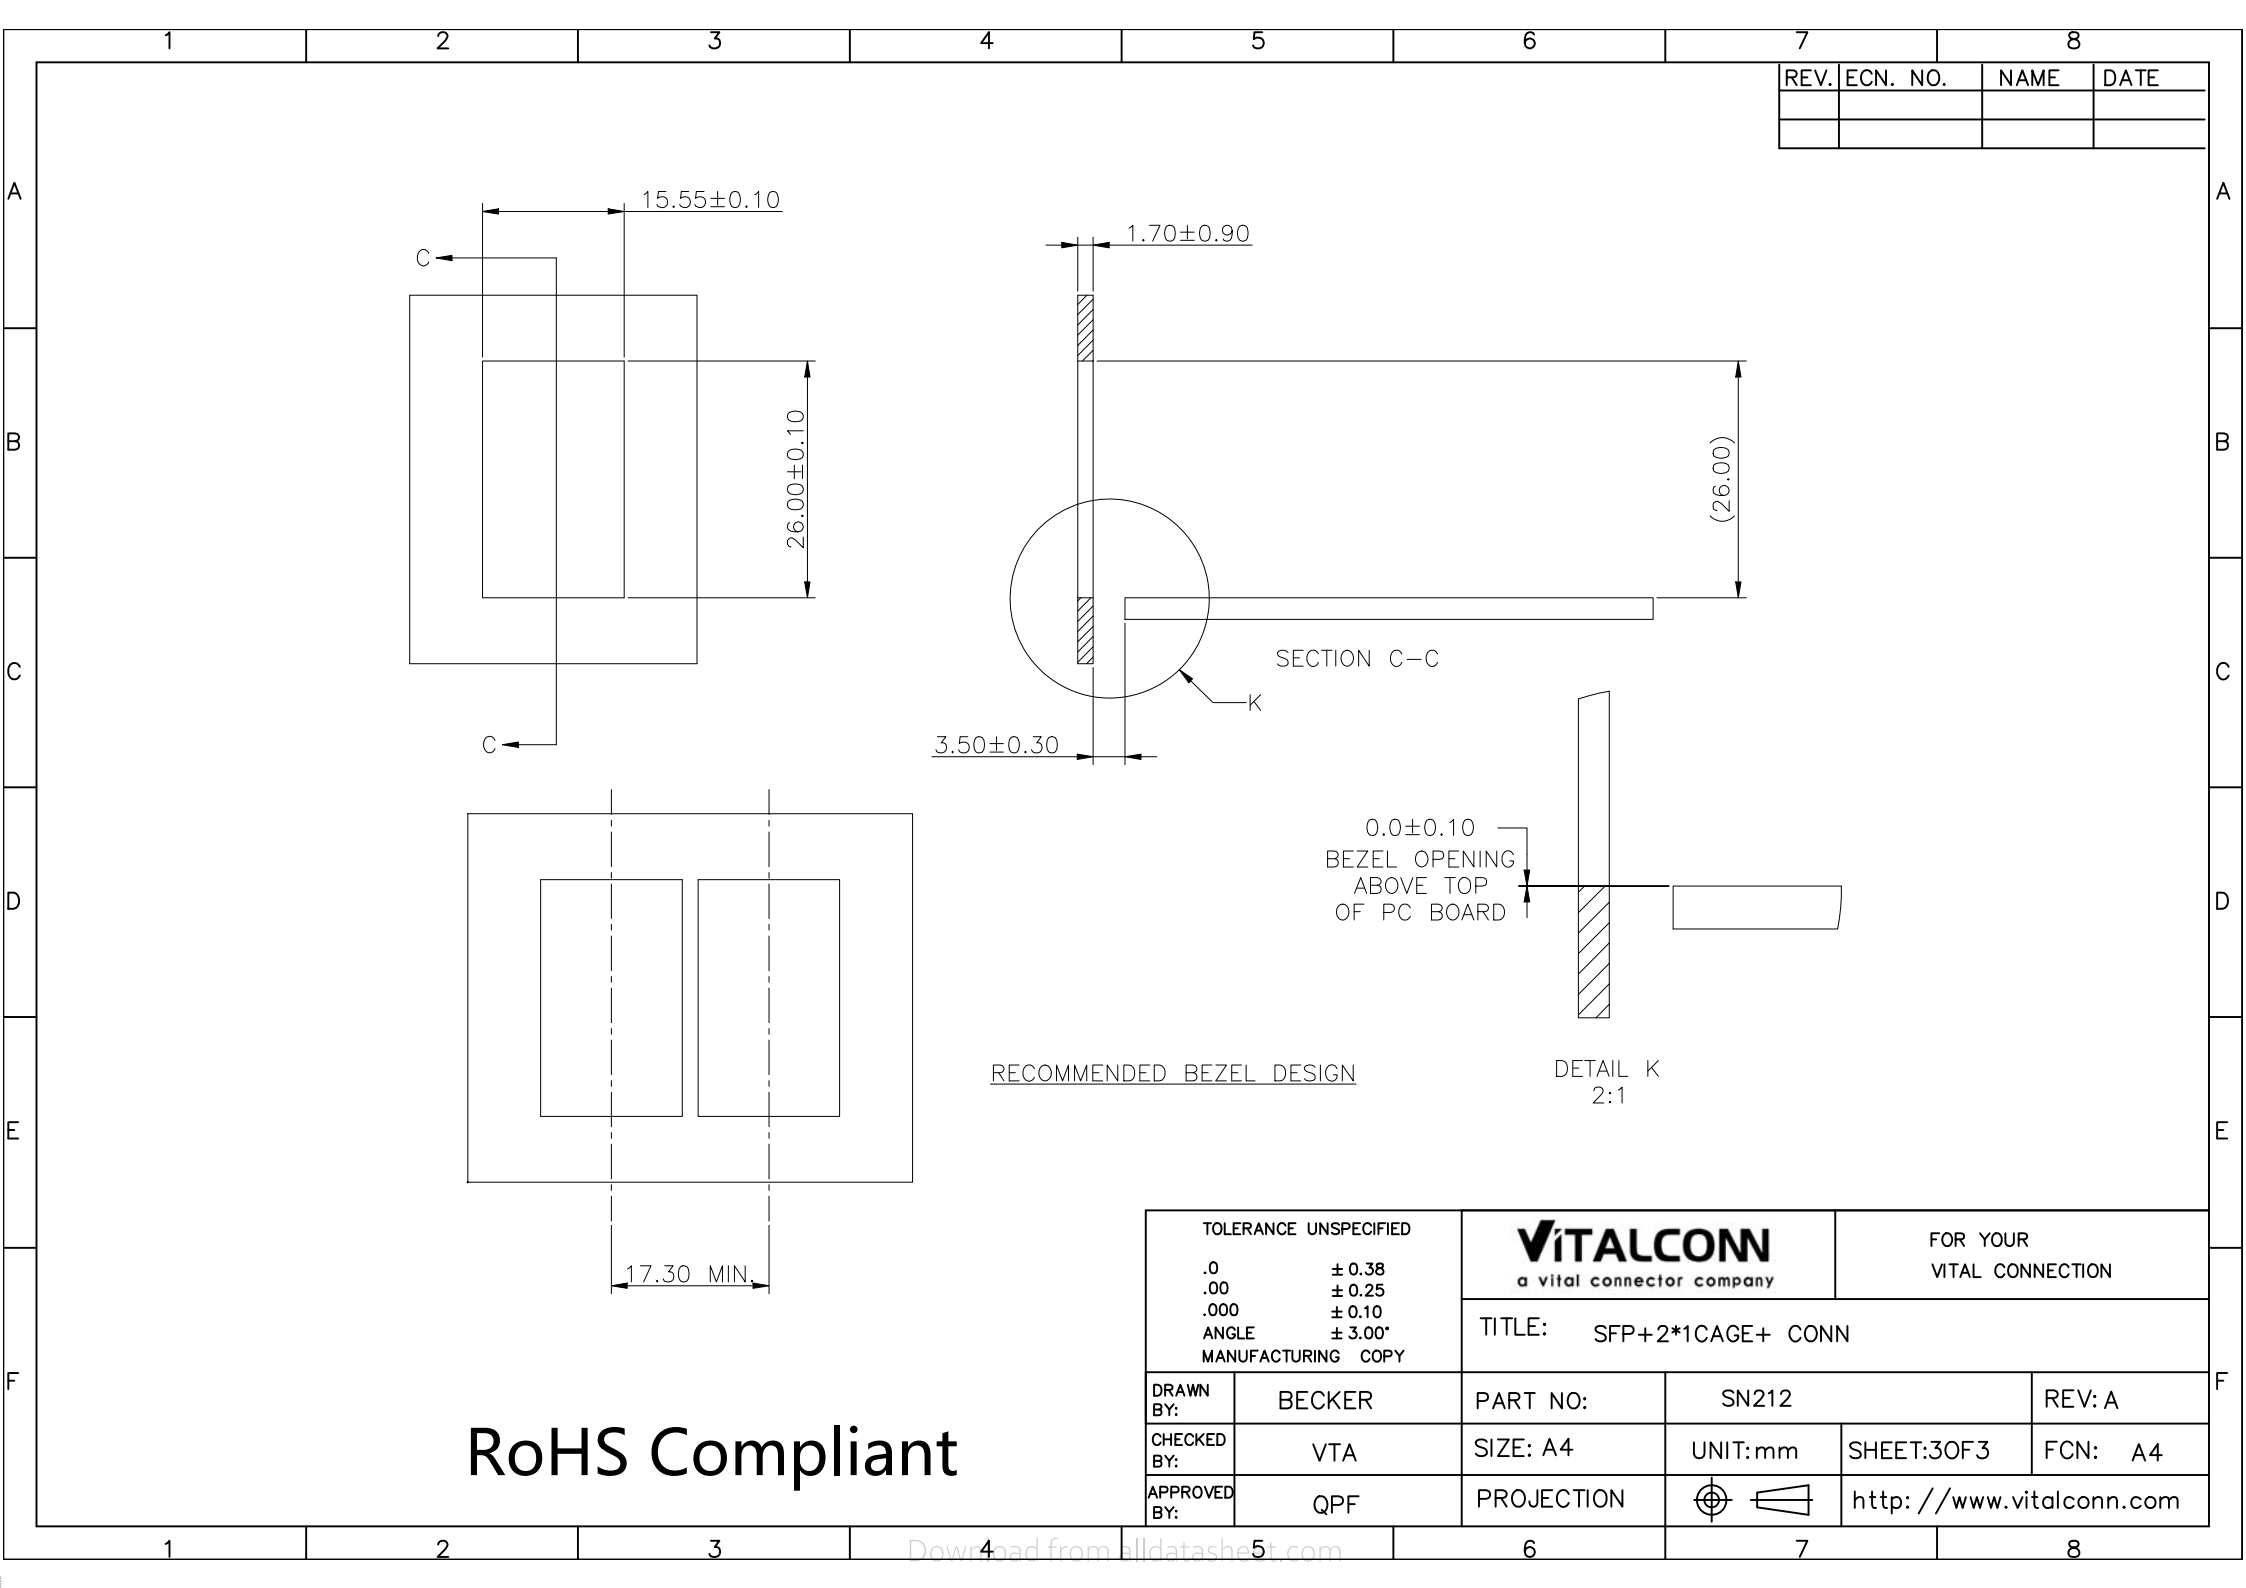

REV.	ECN. NO.	NAME	DATE

TOLERANCE UNSPECIFIED .0 ± 0.38 .00 ± 0.25 .000 ± 0.10 ANGLE $\pm 3.00^\circ$ MANUFACTURING COPY		VITALCON a vital connector company		FOR YOUR VITAL CONNECTION	
				TITLE: SFP+2*1CAGE+ CONN	
DRAWN BY:	BECKER	PART NO:	SN212		REV: A
CHECKED BY:	VTA	SIZE: A4	UNIT:mm	SHEET:30F3	FCN: A4
APPROVED BY:	QPF	PROJECTION		http://www.vitalconn.com	