

RoHS Compliant Product

A suffix of "-C" specifies halogen & lead-free


SMA

FEATURES

- * Low forward voltage drop
- * High current capability
- * High reliability
- * High surge current capability
- * Epitaxial construction

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: Lead solderable per MIL-STD-202, method 208 guaranteed
- * Polarity: As Marked
- * Mounting position: Any
- * Weight: 0.093 grams(Approximately)



	Dimensions in Millimeters		Dimensions in Inches	
A	1.25	1.65	0.049	0.065
B	3.99	4.60	0.157	0.181
C	2.50	2.90	0.098	0.114
D	1.98	2.44	0.078	0.096
E	0.051	0.203	0.002	0.008
F	4.78	5.28	0.188	0.208
G	0.76	1.52	0.030	0.060
H	0.152	0.305	0.006	0.012

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.


TYPE NUMBER	SM2150A	UNITS
Maximum Recurrent Peak Reverse Voltage	150	V
Working Peak Reverse Voltage	150	V
Maximum DC Blocking Voltage	150	V
Maximum Average Forward Rectified Current See Fig. 1	2	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	50	A
Maximum Instantaneous Forward Voltage ($I_F=2\text{Amps}$, $T_a = 25^\circ\text{C}$)	0.85	V
Maximum DC Reverse Current $T_a=25^\circ\text{C}$	0.02	mA
at Rated DC Blocking Voltage $T_a=125^\circ\text{C}$	1	mA
Typical Junction Capacitance (Note1)	150	pF
Typical Thermal Resistance $R_{\theta JA}$ (Note 2)	75	$^\circ\text{C/W}$
Operating Temperature Range T_J	-50 ~ +150	$^\circ\text{C}$
Storage Temperature Range T_{STG}	-65 ~ +175	$^\circ\text{C}$

NOTES:


1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal resistance junction to ambient.

RATING AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

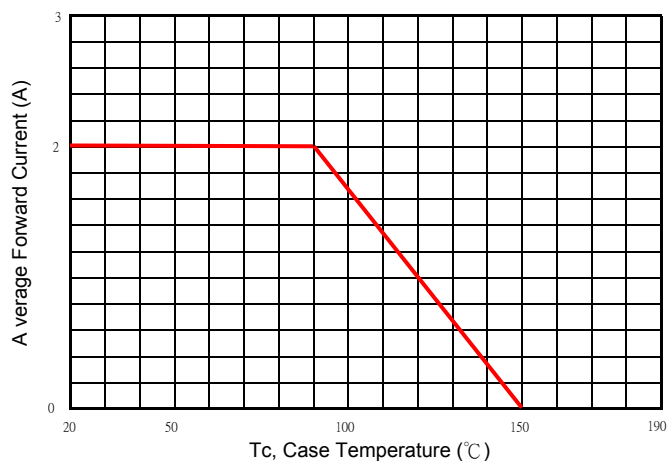


Typical Forward Characteristic

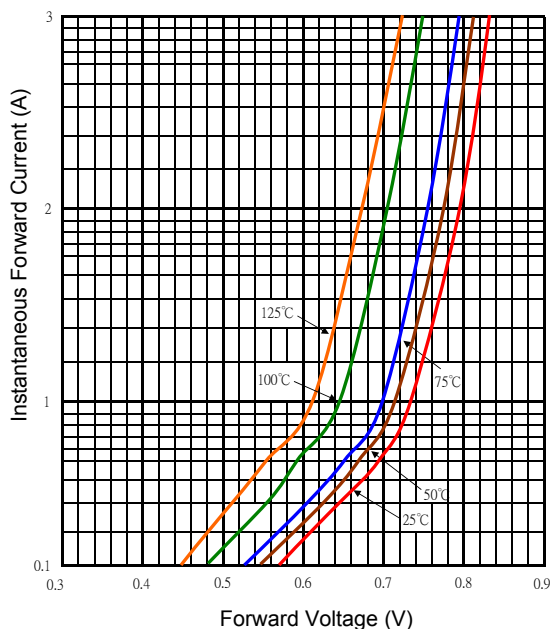

Typical Junction Capacitance

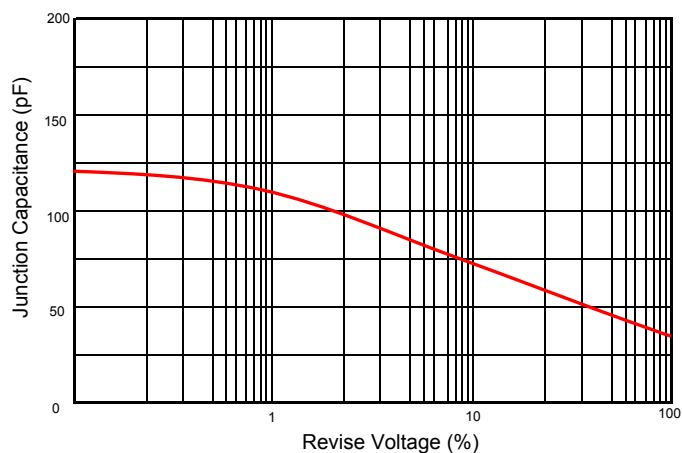

Typical Reverse Characteristic

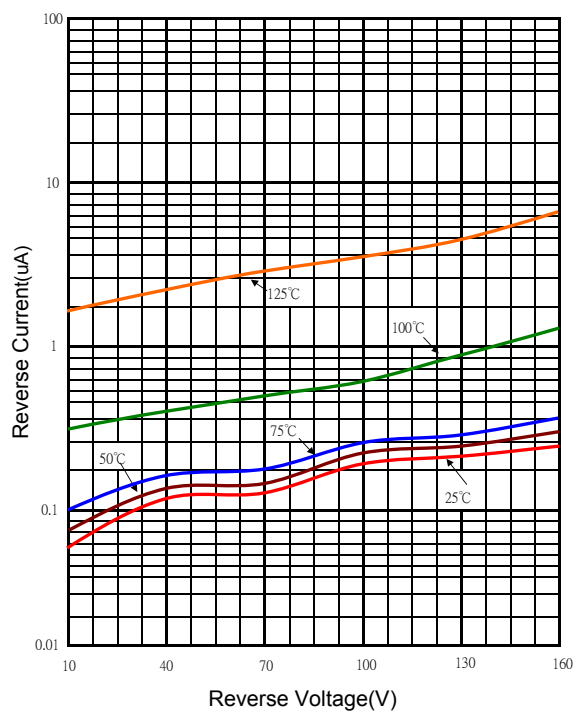

Maximum Non- Repetitive Forward Surge Current

