Extract from the online catalog

RAD-OUT-2D-CNT

Order No.: 2885236



http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2885236

Digital expansion module with 2 digital outputs for output of pulses and frequencies

T B H

Ex n

Product notes

WEEE/RoHS-compliant since: 04/22/2008

http://www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Commercial data

GTIN (EAN)	4 046356 049870
sales group	H174
Pack	1 pcs.
Customs tariff	85177090
Catalog page information	Page 611 (IF-2009)

Technical data

General data

Width	22.5 mm
Height	99 mm
Depth	114.5 mm

Ambient temperature (operation)	-20 °C ... 65 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Degree of protection	IP20
Mounting position	Any
Assembly instructions	on TS 35 profile rail acc. to EN 60715
Housing material	Polyamide PA non-reinforced
Conformance	CE-compliant
ATEX	Ex II 3 G EEx nL IIC
UL, USA / Canada	Class I, Div. 2, Groups A, B, C, D

Connection data


Conductor cross section solid min.	0.2 mm²
Conductor cross section solid max.	4 mm²
Conductor cross section stranded min.	0.2 mm²
Conductor cross section stranded max.	2.5 mm²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Type of connection	Screw connection
Stripping length	8 mm
Screw thread	M3

Certificates / Approvals

Certification Ex: CUL-EX LIS, UL-EX LIS

Diagrams/Drawings

Block diagram

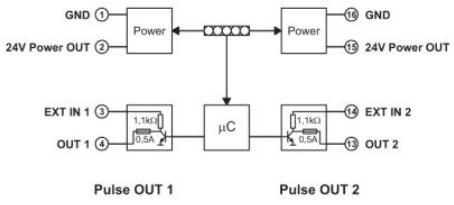

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg,Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
http://www.phoenixcontact.de

© 2011 Phoenix Contact
Technical modifications reserved;