

TOROIDAL POWER TRANSFORMER



P8T SERIES






- High efficiency, low noise emission, quiet operation, small size
- Part No -XXX assigned by MPS based on custom configuration
- Standard Operating Temperature: 0°C to +70°C
(extended operating temperature available)
- RoHS Compliant Product
- UL, CE, CQC Approval

ELECTRICAL SPECIFICATION @ 25°C

Part No	Voltage Regulation (%)	Efficiency Typ (%)	Dimension DxH (mm)	Weight Typ (Kg)	Power Rated (VA)
P8TE-40-XXX	16.0	80	76x32	0.52	40
P8TE-60-XXX	12.0	85	90x35	0.80	60
P8TE-100-XXX	10.0	88	95x45	1.10	100
P8TE-150-XXX	8.0	90	110x45	1.60	150
P8TE-230-XXX	7.2	91	120x50	2.20	230
P8TE-330-XXX	5.0	93	135x60	3.50	330
P8TE-530-XXX	4.3	94	150x65	5.10	530

Mechanical

Schematic (ref only)

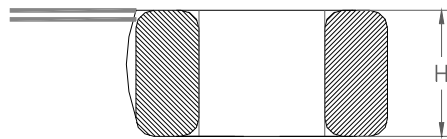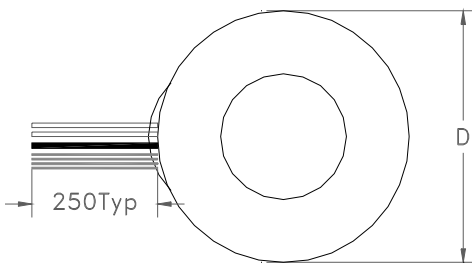

Dimensions

Unless otherwise specified, all tolerances are:

inch: .XX : ± 0.015 .XXX : ± 0.004

mm: X,X : ± 0,38 X,XX : ± 0,10

Product performance is limited to specified parameter. Data is subject to change without prior notice.

P8TE-XXX
0831JW

2463 208th, Ste. 205
Torrance, CA 90501

Phone: (310)533-1455
Fax: (310)533-1853

<http://www.mpsind.com>
Email: sales@mpsind.com