


# CTM2F Series

From .10  $\mu$ H to 1,000  $\mu$ H

## SPECIFICATIONS

Please specify tolerance code when ordering.  
 CTM2F-360\_ ← J =  $\pm$ 5%, K =  $\pm$ 10%, M =  $\pm$ 20%

### ENGINEERING KIT #1F

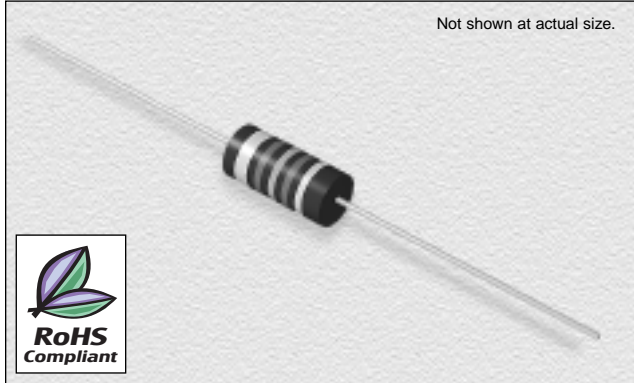


### CHARACTERISTICS

- Description:** Axial leaded molded inductor
- Applications:** Used for various kinds of OSC and TRAP coils. Ideal for various RF applications
- Operating Temperature:** -55°C to +105°C
- Inductance Tolerance:**  $\pm$ 5%,  $\pm$ 10% &  $\pm$ 20%
- Testing:** Inductance and Q are tested on an HP4285A at specified frequency
- Packaging:** Bulk pack or Tape & Reel, 2,500 parts per reel
- Marking:** Five band EIA color code indicating inductance code and tolerance
- Material:** Molded epoxy resin over coil
- Core:** Magnetic core (ferrite or iron) except for values 0.10  $\mu$ H to 4.7  $\mu$ H (phenolic)
- Miscellaneous:** RoHS Compliant.
- Additional Information:** Additional electrical & physical information available upon request
- Samples available. See website for ordering information.**

### PHYSICAL DIMENSIONS

Size	A Max.	B Max.	C Typ.	22 AWG Nom.
mm	9.52 $\pm$ 0.25	3.96 $\pm$ 0.25	26.7	0.643
inches	0.38 $\pm$ 0.01	0.16 $\pm$ 0.01	1.05	0.03

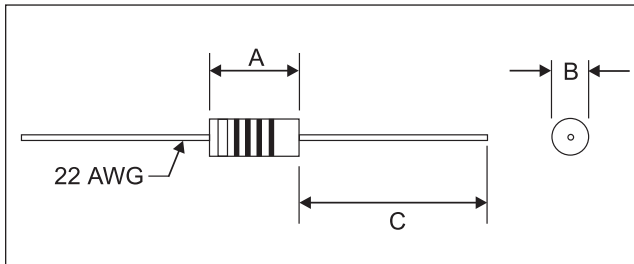

Part Number	Inductance ( $\mu$ H)	L Test Freq. (MHz)	Q Fact. Min.	Q Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. ( $\Omega$ )	Rated DC (mA)
CTM2F-R10K	.10	25	50	25	525	.03	2740
CTM2F-R15M	.15	25	50	25	525	.03	2740
CTM2F-R22M	.22	25	50	25	450	.05	2020
CTM2F-R33M	.33	25	45	25	360	.09	1580
CTM2F-R39K	.39	25	45	25	330	.11	1420
CTM2F-R47M	.47	25	45	25	310	.12	1370
CTM2F-R56K	.56	25	50	25	280	.14	1290
CTM2F-R68K	.68	25	50	25	250	.15	1220
CTM2F-R82K	.82	25	50	25	220	.22	1020
CTM2F-1R0K	1.0	25	50	25	200	.29	880
CTM2F-1R2K	1.2	7.9	33	7.9	180	.42	730
CTM2F-1R5K	1.5	7.9	33	7.9	160	.50	670
CTM2F-1R8K	1.8	7.9	33	7.9	150	.65	590
CTM2F-2R2K	2.2	7.9	33	7.9	135	.95	485
CTM2F-2R7K	2.7	7.9	33	7.9	120	1.2	430
CTM2F-3R3K	3.3	7.9	33	7.9	110	2.0	335
CTM2F-3R9K	3.9	7.9	33	7.9	100	2.3	310
CTM2F-4R7K	4.7	7.9	33	7.9	90	2.6	294
CTM2F-5R6K	5.6	7.9	45	7.9	55	.32	565
CTM2F-6R8K	6.8	7.9	50	7.9	55	.50	450
CTM2F-8R2K	8.2	7.9	50	7.9	50	.60	410
CTM2F-100K	10	7.9	55	7.9	45	.90	335
CTM2F-120K	12	2.5	65	2.5	42	1.1	305
CTM2F-150K	15	2.5	65	2.5	40	1.4	271
CTM2F-180K	18	2.5	75	2.5	34	2.3	213
CTM2F-220K	22	2.5	75	2.5	30	2.5	202
CTM2F-240K	24	2.5	60	2.5	26	2.5	202
CTM2F-270K	27	2.5	60	2.5	25	2.6	198
CTM2F-300K	30	2.5	65	2.5	21	2.8	191
CTM2F-330K	33	2.5	65	2.5	19	3.0	185
CTM2F-360_	36	2.5	60	2.5	15	2.5	202
CTM2F-390_	39	2.5	60	2.5	14	2.6	198
CTM2F-430_	43	2.5	60	2.5	14	2.7	194
CTM2F-470_	47	2.5	55	2.5	13	2.8	193
CTM2F-510_	51	2.5	55	2.5	13	2.9	189
CTM2F-560_	56	2.5	55	2.5	12	3.0	184
CTM2F-620_	62	2.5	55	2.5	11	3.2	180
CTM2F-680_	68	2.5	55	2.5	11	3.3	176
CTM2F-750_	75	2.5	55	2.5	10	3.7	166
CTM2F-820_	82	2.5	50	2.5	10	3.9	162
CTM2F-910_	91	2.5	50	2.5	10	4.3	154
CTM2F-101_	100	2.5	50	2.5	9.5	4.5	151
CTM2F-111_	110	.79	60	.79	8.9	4.9	144
CTM2F-121_	120	.79	65	.79	8.7	5.2	140
CTM2F-131_	130	.79	65	.79	8.5	5.5	137
CTM2F-151_	150	.79	65	.79	8.0	6.1	130
CTM2F-161_	160	.79	65	.79	7.5	6.4	126
CTM2F-181_	180	.79	65	.79	8.0	6.1	130
CTM2F-201_	200	.79	65	.79	6.5	7.1	123
CTM2F-221_	220	.79	65	.79	6.2	7.5	117
CTM2F-241_	240	.79	65	.79	5.9	7.8	115
CTM2F-271_	270	.79	65	.79	5.7	11	143
CTM2F-301_	300	.79	65	.79	5.4	11	140
CTM2F-331_	330	.79	65	.79	5.1	12	136
CTM2F-361_	360	.79	65	.79	4.8	12	134
CTM2F-391_	390	.79	65	.79	4.5	16	117
CTM2F-431_	430	.79	65	.79	4.2	17	115
CTM2F-471_	470	.79	65	.79	3.9	18	112
CTM2F-511_	510	.79	65	.79	3.7	19	109
CTM2F-561_	560	.79	65	.79	3.8	19	107
CTM2F-621_	620	.79	65	.79	3.3	26	93
CTM2F-681_	680	.79	65	.79	3.1	27	91
CTM2F-751_	750	.79	65	.79	2.9	28	88
CTM2F-821_	820	.79	65	.79	2.7	30	86
CTM2F-911_	910	.79	65	.79	2.5	31	84
CTM2F-102_	1000	.79	65	.79	2.3	33	82

12.27.05



Manufacturer of Inductors, Chokes, Coils, Beads, Transformers & Toroids

800-684-5322 Inside US 949-453-1811 Outside US

Copyright © 2005 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice