

C3225X8R2A474K200AB

TDK Item Description : C3225X8R2A474KT****



Application & Main Feature

Commercial Grade (High Temperature Application)

Series

C3225 [EIA CC1210]

Dimensions

L 3.20mm +/-0.4mm
W 2.50mm +/-0.3mm
T 2.00mm +/-0.2mm
B 0.20mm Min.
G

Temperature Characteristic

X8R (-55 to 150 degC +/-15%)

Rated Voltage

2A (100Vdc)

Capacitance

470nF

Capacitance Tolerance

K (+/-10%)

Dissipation Factor

3% Max.

Insulation Resistance


1.06Gohm Min.

AEC-Q200


Not Applicable




DC Bias Characteristic

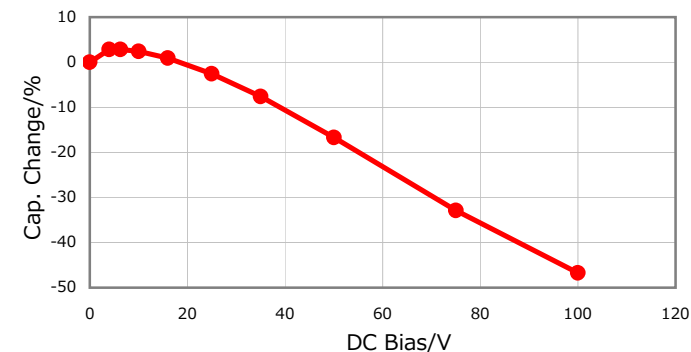


|Z|, ESR vs. Freq. Characteristics

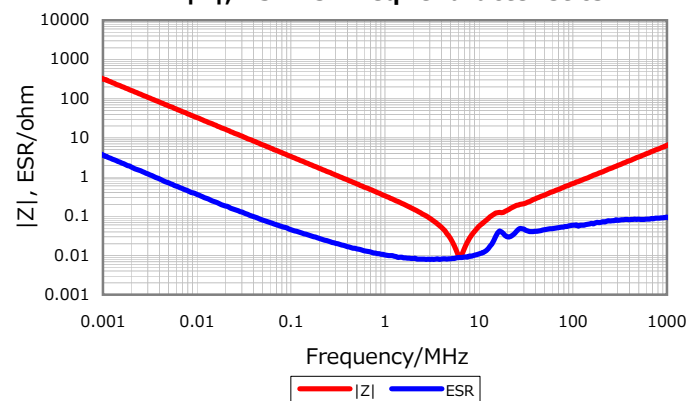


Temperature Characteristics

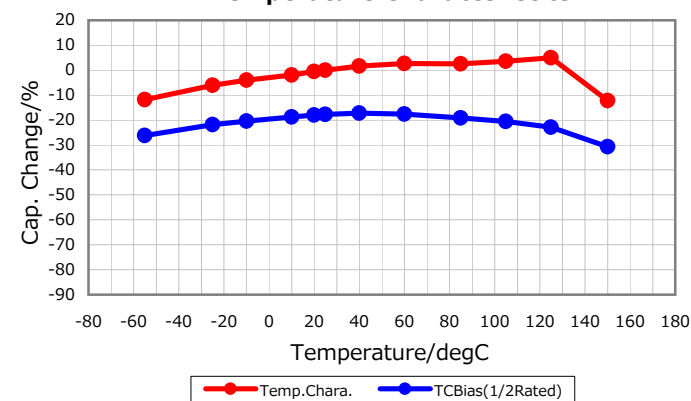

Cap. vs. Freq. Characteristic

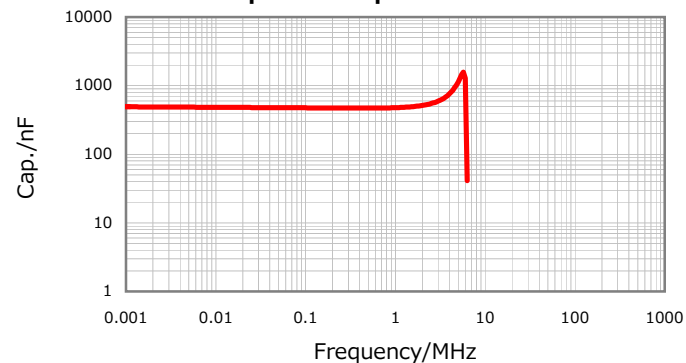

Ripple Temperature Rise Characteristics

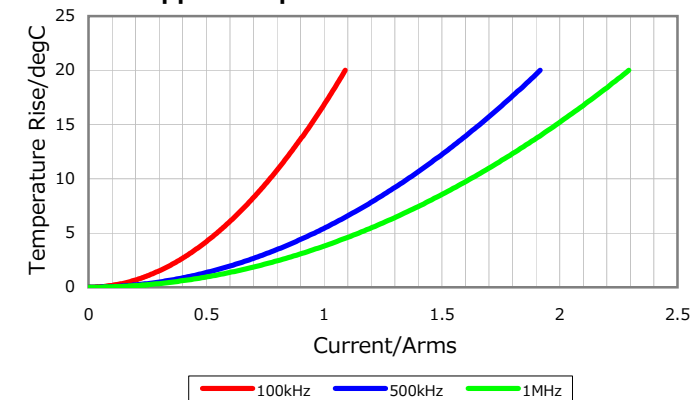

All specifications are subject to change without notice.

January 4, 2016