
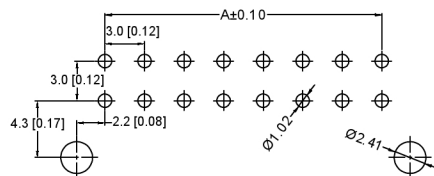

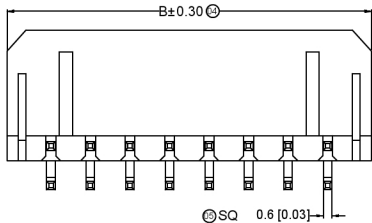


## Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance:  $\geq 1000\Omega$
- Contact resistance:  $\leq 10\text{m}\Omega$
- After environmental testing :  $\leq 20\text{m}\Omega$

X3025 WR X - 2\*XX C-XX XX XX

- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
- Series No.
  - Category : W-wafer
  - Welding Board Angle: R-90°
  - Welding Way: Blank-DIP
  - Row No.-Pin No.: 2\*XX-2\*01P-2\*12P
  - Special NO. : C-The harpoon
  - Material :  
46-P A46 94V-0 66-PA66 94V-0 LP-LCP 94V-0
  - Plating Category:  
G\*\* Gold-Plated Contact "02-2u"  
SN-Bright tin plating 70u"
  - Color : Blank-natural color

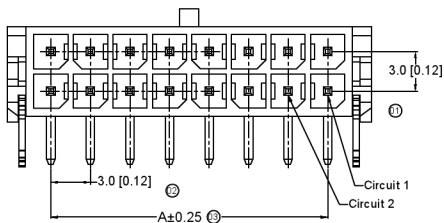

Recommended PCB Layout

General Tolerance $\pm$ 0.05

广东星坤科技股份有限公司

生 日期


文件工程章

REVISIONS

www.heloxkb.com

XKB ANGLAR  $\pm 5^\circ$   
L  $\leq 4$   $\pm 0.2$   
4 < L  $\leq 16$   $\pm 0.3$   
16 < L  $\leq 63$   $\pm 0.4$   
L > 63  $\pm 0.5$

UNSPECIFIED TOLERANCES



Scale 1:3

Poles	Dimensions (mm)	
	A	B
2*01	---	6.65
2*02	3.00	9.65
2*03	6.00	12.65
2*04	9.00	15.65
2*05	12.00	18.65
2*06	15.00	21.65
2*07	18.00	24.65
2*08	21.00	27.65
2*09	24.00	30.65
2*10	27.00	33.65
2*11	30.00	36.65
2*12	33.00	39.65

$\Delta$ X3025WR-2*XXC-66G02	Nylon 66 UL 94V-0	Brass	Gold Flash	X3025H
X3025WR-2*XXC-LPSN	LCP UL 94V-0		Tin-Plated	
X3025WR-2*XXC-46SN	Nylon 46 UL 94V-0			
X3025WR-2*XXC-66SN	Nylon 66 UL 94V-0			
Part No.	Material	Material (Pm)	Finish(Pm)	Mates With xXB Housing

DSND	DATE	SCALE: NA	MODEL TYPE: X3025WR-2*XXC-XXXX
DWNN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	3.00 mm Crimp Style Connectors
APPD	DATE	SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0