


# LOW-PROFILE DUAL WIPE SOCKET

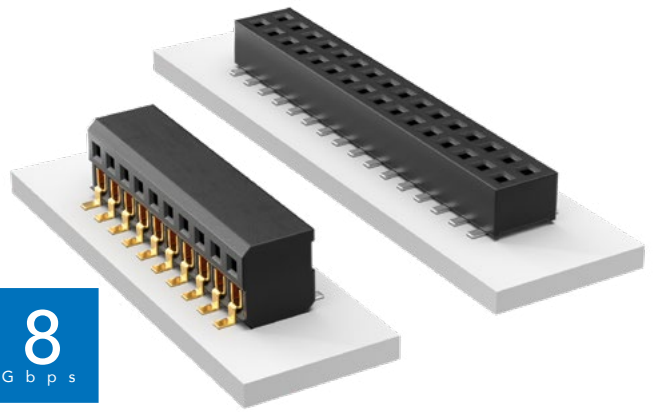

(1.27 mm) .050" PITCH • CLP SERIES

## CLP

Mates:  
FTSH, FTS, FW



### SPECIFICATIONS

**Insulator Material:**  
Black Liquid Crystal Polymer  
**Contact Material:**  
Phosphor Bronze  
**Plating:**  
Sn or Au over  
50 μ" (1.27 μm) Ni  
**Current Rating (CLP/FTSH):**  
3.4 A per pin  
(2 pins powered)  
**Voltage Rating:**  
280 VAC/395 VDC  
**Operating Temp Range:**  
-55 °C to +125 °C  
**Insertion Depth:**  
Top Entry =  
(1.40 mm) .055" minimum  
Bottom Entry =  
(2.41 mm) .095" minimum  
plus board thickness  
DH Entry =  
(2.31 mm) .091" to (2.67 mm) .105"  
**Normal Force:**  
60 grams (0.59 N) average  
**Max Cycles:**  
100 with 10 μ" (0.25 μm) Au

### PROCESSING

**Lead-Free Solderable:**  
Yes  
**SMT Lead Coplanarity:**  
(0.10 mm) .004" max (02-35)  
(0.15 mm) .006" max (36-50)\*  
\*(.004" stencil solution  
may be available; contact  
ipg@samtec.com)

### ALSO AVAILABLE

MOQ Required

Single row  
Other platings

02 thru 50


**-F**  
= Gold flash on contact, Matte Tin on tail  
**-L**  
= 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail  
**-G**  
= 10 μ" (0.25 μm) Gold (-D only)

**-D**  
= Double Row  
**-DH**  
= Double Horizontal (Requires FTSH-04 lead style)



**-BE**  
= Bottom Entry (Required for bottom entry applications)  
**-A**  
= Alignment Pin (Not available with -PA option) (05, 06, 07, 08, 10, 12, 15, 20, 25, 30, 40 positions only) (-DH option and other sizes. Contact Samtec.)  
**-K**  
= (4.00 mm) .157" DIA Polyimide film Pick & Place Pad (3 positions minimum)  
**-P**  
= Pick & Place Pad (5 positions min. -D only) (Not always necessary for auto placement. See Flex Processing.)  
**-PA**  
= Pick & Place Pad with Alignment Pin (-D only) (Not available with -A option)

**-TR**  
= Tape & Reel

**-FR**  
= Full Reel Tape & Reel (must order maximum quantity per reel; contact Samtec for quantity breaks)

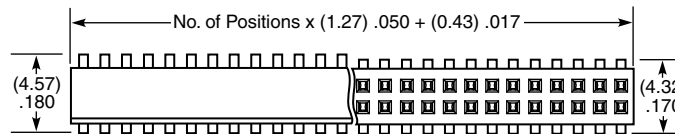

PIN/ROW	A
04-15	(3.56) .140
16-50	(7.11) .280



-PA OPTION



-P OPTION

If odd pins/row, alignment pins are on middle position on centerline of the part.  
If even pins/row, then alignment pins are between middle two positions.

**Note:**  
Some lengths, styles and options are non-standard, non-returnable.