


SHEET 1 OF 1

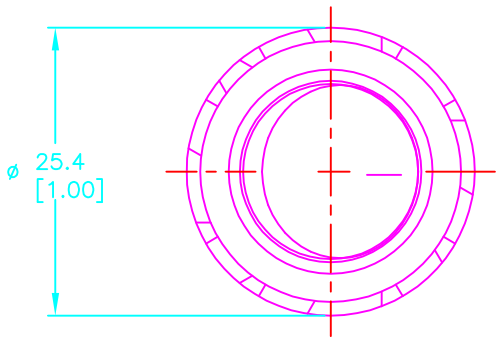






BOTTOM VIEW

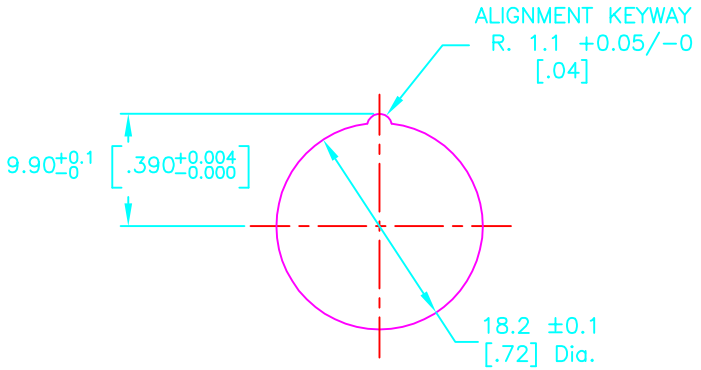

RECOMMEND PANEL MOUNTING
6MM PANEL THICKNESS MAX.

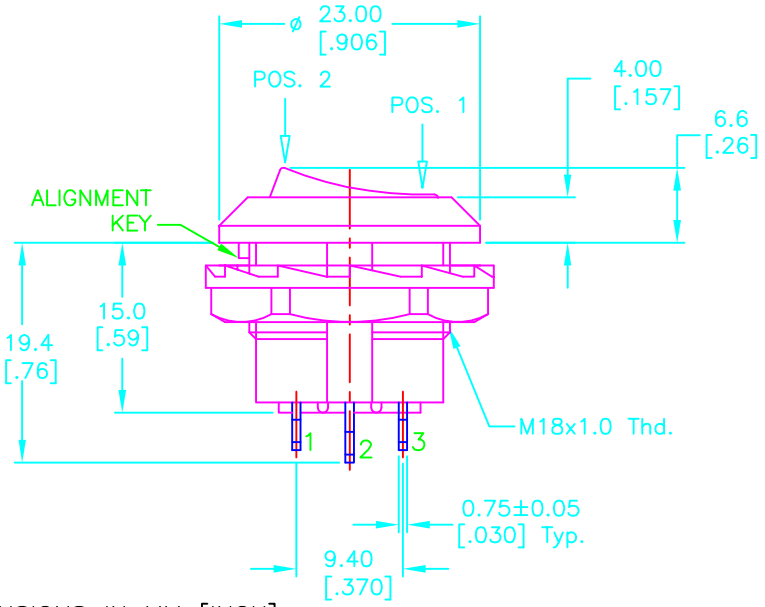

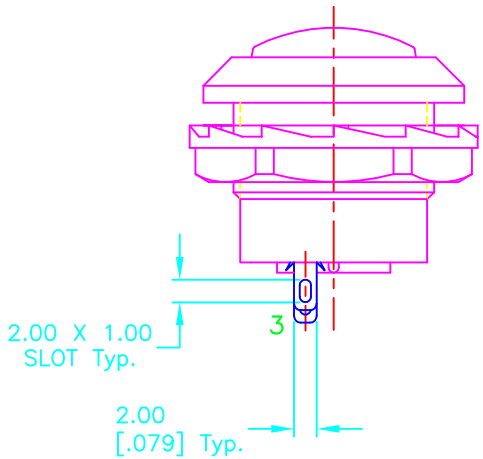



CIRCUIT: SPDT
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 10A @125V, 6A @250VAC UL, CUL APPROVED
5. CONTACT RESISTANCE: 50m ohm Max.
6. INSULATION RESISTANCE: DC 500V 100m ohm Min.
7. DIELECTRIC STRENGTH: AC 1500V 1 minute.
8. OPERATING TEMPERATURE: 0°C TO +65°C
9. 2002/95/ES (ROHS) COMPLIANT.

▲

SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
1–2	2–3

REV.	PCR No.	DESCRIPTION	DATE	CHKD
B	20635	CHD TITLE WAS RR3130CBLKBLKNS	6/7/12	drg
A	17441	RELEASED FOR PRODUCTION	7/6/07	TN

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH™

TITLE: RR3130CBLKBLKES

SCALE	DATE	DR	DWG	REV
1.5:1	7/6/07	TN	F030026	B