
# Ferrules INSULATED (INDUSTRIAL STANDARD)

## French Code <Polypropylene insulated and tin-plated electrolytic copper>

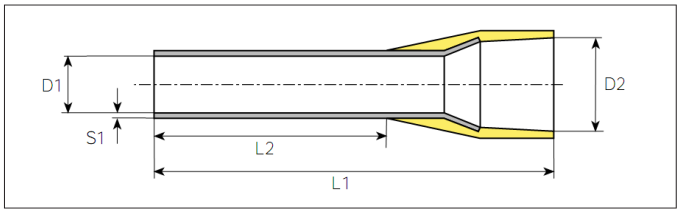



DIN 46228, part 4, except #

| Model No. | Applicable wire | | Style | Colour Code | Dimensions (mm) | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | mm2 | AWG | | | L1 | L2 | D1 | S1 | D2 |
| FWE0.25-6 | 0.25 | 24 | II | Violet | 11 | 6 | 0.8 | 0.15 | 1.9 |
| FTR0.5-8 | 0.50 | 20 | II | White | 14 | 8 | 1 | 0.15 | 2.6 |
| FTR0.75-8 # | 0.75 | 18 | I | Light Blue | 14 | 8 | 1.2 | 0.15 | 3.2 |
| FTR1.0-8 # | 1.00 | 18 | I | Red | 14 | 8 | 1.4 | 0.15 | 3.4 |
| FTR1.5-8 # | 1.50 | 16 | I | Black | 14 | 8 | 1.7 | 0.15 | 3.8 |
| FWE2.5-8 | 2.50 | 14 | I | Grey | 14 | 8 | 2.2 | 0.15 | 4.2 |
| FWE4-10 | 4.00 | 12 | I | Orange | 17 | 10 | 2.8 | 0.2 | 4.8 |
| FWE6-12 | 6.00 | 10 | I | Green | 20 | 12 | 3.5 | 0.2 | 6.3 |
| FWE10-12 | 10.0 | 8 | I | Brown | 22 | 12 | 4.5 | 0.2 | 7.6 |
| FWE16-12 | 16.0 | 6 | II | White | 24 | 12 | 5.8 | 0.2 | 8.8 |
| FWE25-16 | 25.0 | 4 | I | Black | 30 | 16 | 7.3 | 0.2 | 11.2 |
| FWE35-16 | 35.0 | 2 | I | Red | 30 | 16 | 8.3 | 0.2 | 12.7 |
| FWE50-20 | 50.0 | 1 | I | Blue | 36 | 20 | 10.3 | 0.3 | 15 |

*Note: 1) Style I - Suitable for Tri-rated cable, Style II - Standard*
*2) Maximum operating temperature: + 105℃*
*3) Delivery lead times may vary depending on the product. These products are **ONLY** available from the following JST affiliates; J.S.T. (U.K.) Ltd, J.S.T. Belgium N.V., J.S.T. India Liaison Office, and JST-SouthAfrica.com.*

## German Code <Polypropylene insulated and tin-plated electrolytic copper>

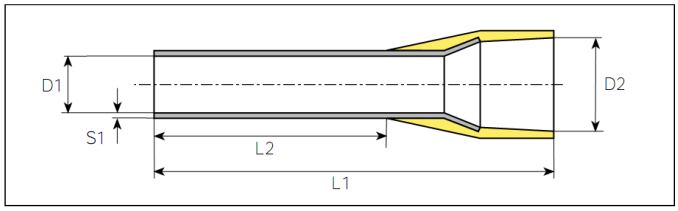


DIN 46228, part 4, except #

| Model No. | Applicable Wire | | Style | Colour Code | Dimensions | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | mm2 | AWG | | | L1 | L2 | D1 | S1 | D2 |
| GWE0.25-6 | 0.25 | 24 | II | Light Blue | 11 | 6 | 0.8 | 0.15 | 1.9 |
| GTR0.5-8 | 0.50 | 20 | II | Orange | 14 | 8 | 1 | 0.15 | 2.6 |
| GTR0.75-8 # | 0.75 | 18 | I | White | 14 | 8 | 1.2 | 0.15 | 3.2 |
| GTR1.0-8 # | 1.00 | 18 | I | Yellow | 14 | 8 | 1.4 | 0.15 | 3.4 |
| GTR1.5-8 # | 1.50 | 16 | I | Red | 14 | 8 | 1.7 | 0.15 | 3.8 |
| GWE2.5-8 | 2.50 | 14 | I | Blue | 14 | 8 | 2.2 | 0.15 | 4.2 |
| GWE4-10 | 4.00 | 12 | I | Grey | 17 | 10 | 2.8 | 0.2 | 4.8 |
| GWE6-12 | 6.00 | 10 | I | Black | 20 | 12 | 3.5 | 0.2 | 6.3 |
| GWE10-12 | 10.0 | 8 | I | Ivory | 22 | 12 | 4.5 | 0.2 | 7.6 |
| GWE16-12 | 16.0 | 6 | II | Green | 24 | 12 | 5.8 | 0.2 | 8.8 |
| GWE25-16 | 25.0 | 4 | I | Brown | 30 | 16 | 7.3 | 0.2 | 11.2 |
| GWE35-16 | 35.0 | 2 | I | Beige | 30 | 16 | 8.3 | 0.2 | 12.7 |
| GWE50-20 | 50.0 | 1 | I | Olive | 36 | 20 | 10.3 | 0.3 | 15 |

*Note: 1) Style I - Suitable for Tri-rated cable, Style II - Standard*
*2) Maximum operating temperature: + 105℃*
*3) Delivery lead times may vary depending on the product. These products are **ONLY** available from the following JST affiliates; J.S.T. (U.K.) Ltd, J.S.T. Belgium N.V., J.S.T. India Liaison Office, and JST-SouthAfrica.com.*