

Z100 THRU Z330


SILICON PLANAR ZENER DIODES

Voltage Range: 100 to 330V Current: 0.5A

Standard Zener voltage tolerance is $\pm 10\%$. Add Suffix "B" for $\pm 5\%$ tolerance. Other tolerances are available upon request.

Mechanical Data


- **Case:** DO-41 molded plastic
- **Terminals:** Plated axial leads, solderable per MIL-STD202E, method 208C
- **Mounting Position:** Any

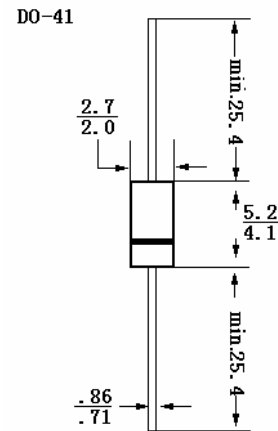

DO-41 Plastic Package
Dimensions in mm

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

	Symbol	Value	Unit
Power Dissipation	P_{tot}	1	W
Forward Voltage @ $I_F = 1\text{A}$	V_F	1	V
Junction Temperature	T_j	175	$^\circ\text{C}$
Storage Temperature Range	T_s	-65 to +175	$^\circ\text{C}$



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103



ISO 14001:2004
Certificate No. 7116




ISO 9001:2000
Certificate No. 0506098

Dated : 22/01/2005

Z100 THRU Z330

TYPE	Zener Voltage		Zener Impedance		Zener Impedance		Reverse Current		Forward Voltage
	V_Z (V) at I_{ZT} (mA)		R_Z (Max)(Ω) at I_{ZT} (mA)		R_{ZK} (Max)(Ω) at I_{ZK} (mA)		I_R (Max)(μ A) at V_R (V)		$I_F = 1.0A$ (Max)
Z100	100	2.5	350	2.5	3000	0.25	0.5	75	1.0
Z105	105	2.4	400	2.4	3500	0.25	0.5	77	1.0
Z110	110	2.3	450	2.3	4000	0.25	0.5	80	1.0
Z115	115	2.2	500	2.2	4250	0.25	0.5	85	1.0
Z120	120	2.1	550	2.1	4500	0.25	0.5	90	1.0
Z130	130	1.9	700	1.9	5000	0.25	0.5	95	1.0
Z135	135	1.85	750	1.85	5250	0.25	0.5	100	1.0
Z140	140	1.8	800	1.8	5500	0.25	0.5	105	1.0
Z150	150	1.7	1000	1.7	6000	0.25	0.5	110	1.0
Z160	160	1.6	1100	1.6	6500	0.25	0.5	120	1.0
Z170	170	1.5	1200	1.5	6750	0.25	0.5	130	1.0
Z180	180	1.4	1350	1.4	7000	0.25	0.5	140	1.0
Z190	190	1.3	1500	1.3	7500	0.25	0.5	150	1.0
Z200	200	1.2	1700	1.2	8000	0.25	0.5	160	1.0
Z220	220	1.1	2000	1.1	8250	0.25	0.5	170	1.0
Z240	240	1.0	2200	1.0	8500	0.25	0.5	180	1.0
Z270	270	0.9	2500	0.9	8750	0.25	0.5	200	1.0
Z300	300	0.8	3000	0.8	9000	0.25	0.5	220	1.0
Z330	330	0.75	4000	0.75	9500	0.25	0.5	240	1.0

(1). Tested with pulses $t_p = 20$ ms.



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103









ISO 14001:2004
Certificate No. 7116




ISO 9001:2000
Certificate No. 0506098

Dated : 22/01/2005

Z100 THRU Z330

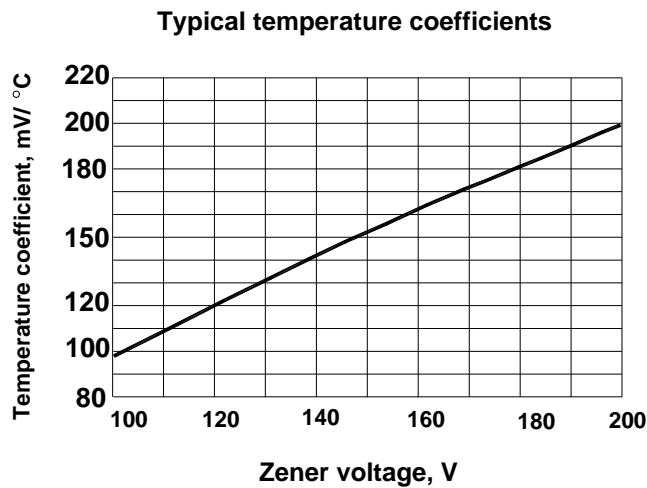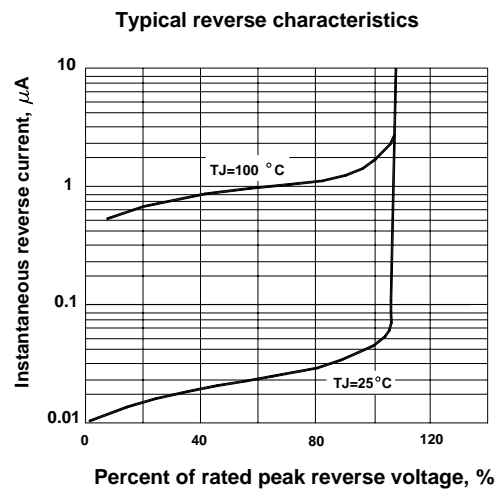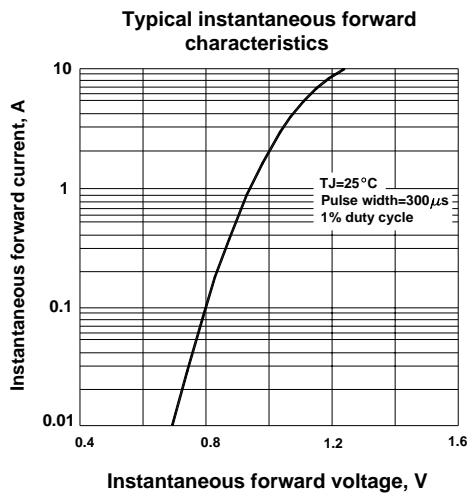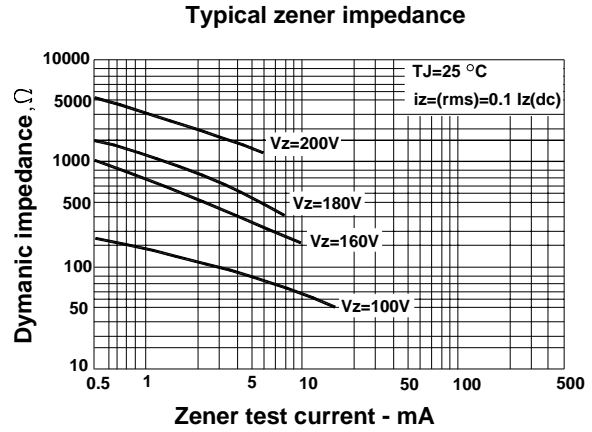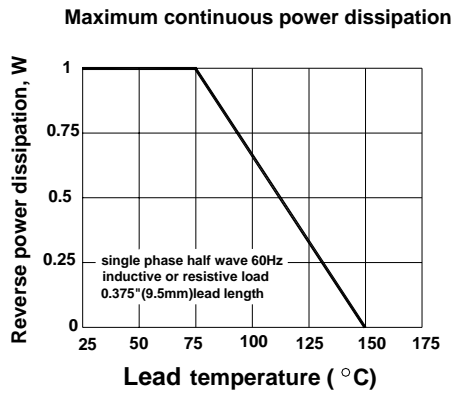

SEMTECH ELECTRONICS LTD.
(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103

ISO 14001:2004
Certificate No. 7116

ISO 9001:2000
Certificate No. 0506098

Dated : 22/01/2005