


used for: D-SUB


AT ALL TIMES WATER RESISTANT CONNECTORS NOT IN USE SHOULD BE COVERED WITH A CONEC WATER RESISTANT CAP OR WATER TIGHT HOOD.


No. of pos.	A +0.2	B +0.2	C	D -0.25	PART NO.
9	21.1	39.4	25.00 $^{+0.12}_{-0.13}$	16.46	**6STD09SCM99B30X**
15	21.1	47.7	33.30 $^{+0.15}_{-0.1}$	24.79	**6STD15SCM99B30X**
25	21.1	61.4	47.04 ±0.13	38.50	**6STD25SCM99B30X**
37	21.1	77.9	63.50 ±0.13	54.96	**6STD37SCM99B30X**

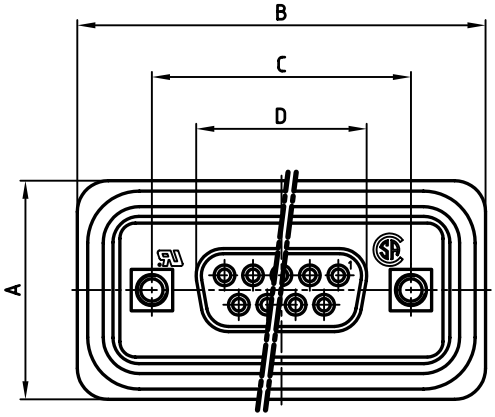

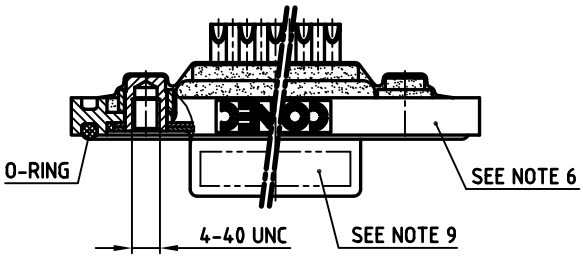

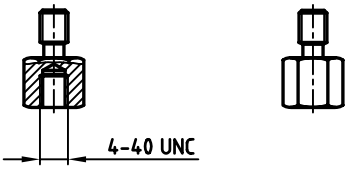

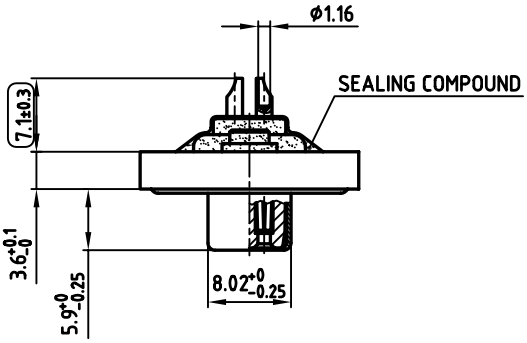



NOTES:

1. METALSHELLS: COPPER ALLOY; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
   PLATING: 30µ" HARD GOLD OVER min. 50µ" NICKEL
   SOLDER CUP ACCEPTS CABLE AWG 20
4. THREADED INSERT: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
5. COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
6. FRAME: ZINC DIECAST; NICKEL PLATED
7. HEXLOCKING SCREW: STAINLESS STEEL
8. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
9. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
10. ( ) = CHECK DIMENSION

Directive 2002/95/EC „RoHS" Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance

	date	name
2006		
drawn	09.02.	Lehmenkühler
appd.	09.02.	Mickenbecker
norm	DIN 41652	
d-old		

scale: 2:1
material: SEE NOTES

title:
D-SUB FEMALE
9-37pos. SOLDER CUP
with threaded insert and hexlocking screw

dwg no: 18K1A424
AutoCAD 2004 | DIN-A 3 | sh: 1/1

part no: SEE TABLE