

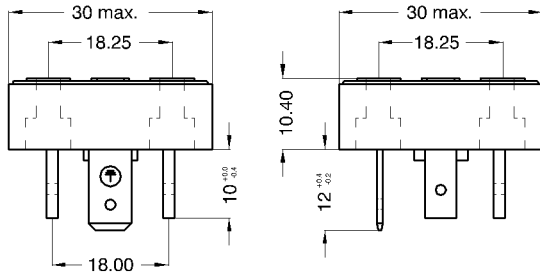


**DIMENSIONS (mm)**




top view



**CASING**

GSA 3000, Hirschmann  
colour black / Farbe schwarz

**CIRCUIT DIAGRAM**



**MARKING**

MEDER-Label, Type  
Production code EN60062/  
Factory code, circuit diagram  
  
MEDER-Logo, Typ  
Produktionscode  
EN60062/Fertigungsstätte  
Schaltbild



unspecified tolerances acc. to DIN ISO 2768-m

Magnetical properties	Conditions	Min	Typ	Max	Unit
Pull in	at 20°C	7,5		14	VDC
Test equipment		PK 082+KMS-19			

Special Product Data	Conditions	Min	Typ	Max	Unit
Contact - form		A - NO			
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
operating voltage				180	VDC
operating ampere				1	A
Switching current				0,5	A
Housing material		mineral-filled epoxy			
Case color		black			
Sealing compound		Polyurethan			

Environmental data	Conditions	Min	Typ	Max	Unit
Ambient temperature		-20		85	°C
Storage temperature		-35		85	°C

Customer side	Conditions	Min	Typ	Max	Unit
connector design		GSA 3000, Hirschmann			