



# TPD7S019 7-Channel Integrated ESD Solution for VGA Port with Integrated Level-Shifter and Matching Impedance

## 1 Features

- 7-Channel ESD Protection Includes ESD Protection, Level-Shifting, Buffering and Sync Impedance Matching
- Exceeds IEC61000-4-2 (Level 4) ESD Protection to Requirements on the External Pins
  - ±8-kV IEC 61000-4-2 Contact Discharge
- Very Low Loading Capacitance from ESD Protection Diodes on VIDEO Lines (2.5 pF)
- 5-V Drivers for HSYNC and VSYNC Lines
- Integrated Impedance Matching Resistors on Sync Lines
- Bidirectional Level-Shifting N-Channel FETs Provided for DDC\_CLK and DDC\_DATA Channels
- Flow-Through Single-In-Line Pin Mapping Ensures no Additional Board Layout Burden While Placing the ESD Protection Chip Near the Connector

## 2 Applications

- End Equipment:
  - Desktop and Notebook PCs
  - Set Top Boxes
  - TVs
- Interfaces:
  - VGA
  - DVI-I

## 3 Description

The TPD7S019 device is an integrated electrostatic discharge (ESD) circuit protection solution for VGA and DVI-I connectors. It integrates transient voltage suppression (TVS) protection diodes for VIDEO, DDC and SYNC signals and meets the IEC61000-4-2 standard for ±8-kV contact ESD protection. The TVS diodes only add low capacitances to help signals run at high-speed. It also provides level-shifting for the DDC signals saving external level-shifters. Two noninverting drivers on HSYNC and VSYNC convert TTL input levels to CMOS output levels and each buffer has a series termination resistor connected to the SYNC\_OUT pin, eliminating the external termination resistors. Three supply lines control the power rails of the VIDEO, DDC and SYNC channels to facilitate interfacing with low voltage video controller ICs in mixed supply-voltage environments. The TPD7S019 comes with two package options. The 16-pin RSV is compact and space-saving. The 16-pin DBQ package and pinout are optimized for easy board layout.


This ESD protection product is a good solution to protect the VGA and DVI-I ports for desktop and laptop PCs, set top boxes, TVs and monitors.

### Device Information<sup>(1)</sup>

| PART NUMBER | PACKAGE   | BODY SIZE (NOM)   |
|-------------|-----------|-------------------|
| TPD7S019    | SSOP (16) | 4.90 mm × 3.90 mm |
|             | UQFN (16) | 2.60 mm × 1.80 mm |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

### Application Schematic

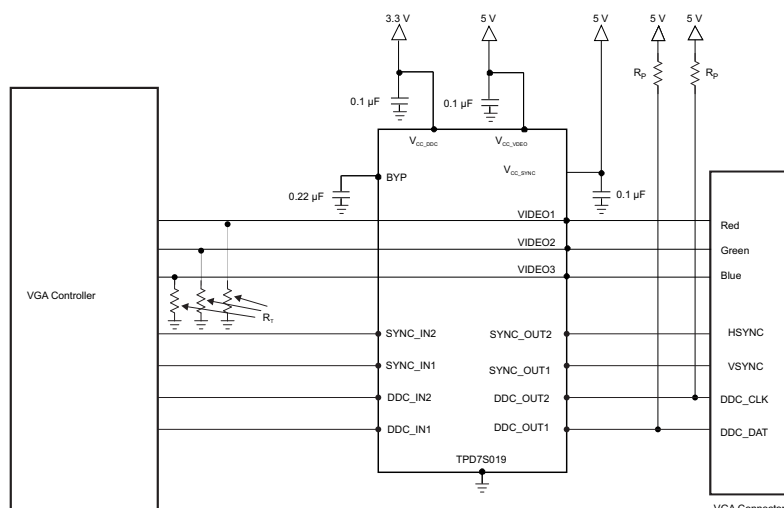

Copyright © 2016, Texas Instruments Incorporated



## Table of Contents

|                                                |          |                                                                  |           |
|------------------------------------------------|----------|------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                        | <b>1</b> | 7.4 Device Functional Modes.....                                 | <b>9</b>  |
| <b>2 Applications</b> .....                    | <b>1</b> | <b>8 Application and Implementation</b> .....                    | <b>10</b> |
| <b>3 Description</b> .....                     | <b>1</b> | 8.1 Application Information.....                                 | <b>10</b> |
| <b>4 Revision History</b> .....                | <b>2</b> | 8.2 Typical Application .....                                    | <b>10</b> |
| <b>5 Pin Configuration and Functions</b> ..... | <b>3</b> | <b>9 Power Supply Recommendations</b> .....                      | <b>11</b> |
| <b>6 Specifications</b> .....                  | <b>4</b> | <b>10 Layout</b> .....                                           | <b>12</b> |
| 6.1 Absolute Maximum Ratings .....             | 4        | 10.1 Layout Guidelines .....                                     | 12        |
| 6.2 ESD Ratings.....                           | 4        | 10.2 Layout Example .....                                        | 12        |
| 6.3 Recommended Operating Conditions.....      | 5        | <b>11 Device and Documentation Support</b> .....                 | <b>13</b> |
| 6.4 Thermal Information .....                  | 5        | 11.1 Documentation Support .....                                 | 13        |
| 6.5 Electrical Characteristics.....            | 5        | 11.2 Receiving Notification of Documentation Updates .....       | 13        |
| 6.6 Typical Characteristics .....              | 7        | 11.3 Community Resources.....                                    | 13        |
| <b>7 Detailed Description</b> .....            | <b>8</b> | 11.4 Trademarks .....                                            | 13        |
| 7.1 Overview .....                             | 8        | 11.5 Electrostatic Discharge Caution.....                        | 13        |
| 7.2 Functional Block Diagram .....             | 8        | 11.6 Glossary .....                                              | 13        |
| 7.3 Feature Description.....                   | 8        | <b>12 Mechanical, Packaging, and Orderable Information</b> ..... | <b>13</b> |


## 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


|                                                                                                                                                                                                                                                                                                                                                                                                      |             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| <b>Changes from Revision D (April 2016) to Revision E</b> .....                                                                                                                                                                                                                                                                                                                                      | <b>Page</b> |
| • Updated <a href="#">Figure 6</a> .....                                                                                                                                                                                                                                                                                                                                                             | <b>10</b>   |
| <b>Changes from Revision C (November 2015) to Revision D</b> .....                                                                                                                                                                                                                                                                                                                                   | <b>Page</b> |
| • Updated the <a href="#">Functional Block Diagram</a> .....                                                                                                                                                                                                                                                                                                                                         | <b>8</b>    |
| <b>Changes from Revision B (December 2012) to Revision C</b> .....                                                                                                                                                                                                                                                                                                                                   | <b>Page</b> |
| • Added <i>Pin Configuration and Functions</i> section, <i>ESD Ratings</i> table, <i>Feature Description</i> section, <i>Device Functional Modes</i> , <i>Application and Implementation</i> section, <i>Power Supply Recommendations</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section ..... | <b>1</b>    |
| <b>Changes from Original (August 2010) to Revision A</b> .....                                                                                                                                                                                                                                                                                                                                       | <b>Page</b> |
| • Removed PREVIEW status from the RSV package.....                                                                                                                                                                                                                                                                                                                                                   | <b>3</b>    |
| <b>Changes from Revision A (March 2012) to Revision B</b> .....                                                                                                                                                                                                                                                                                                                                      | <b>Page</b> |
| • Removed non released part descriptions from the datasheet.....                                                                                                                                                                                                                                                                                                                                     | <b>1</b>    |

## 5 Pin Configuration and Functions

**RSV Package  
16-Pin UQFN  
Top View**

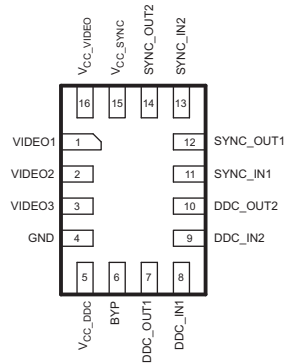

**DBQ Package  
16-Pin SSOP  
Top View**

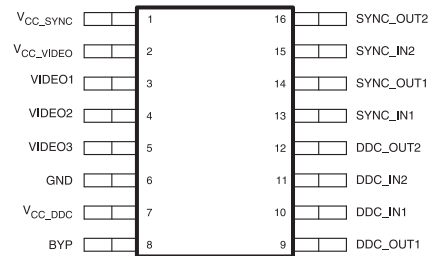

### Pin Functions

| PIN                   |     |     | TYPE  | DESCRIPTION                                                                                                 |
|-----------------------|-----|-----|-------|-------------------------------------------------------------------------------------------------------------|
| NAME                  | DBQ | RSV |       |                                                                                                             |
| BYP                   | 8   | 6   | Power | Bypass pin. Using a 0.2-μF bypass capacitor increases the ESD robustness of the system                      |
| DDC_IN1               | 10  | 8   | I     | DDC signal input. Connects to the VGA controller side of one of the sync lines                              |
| DDC_IN2               | 11  | 9   |       |                                                                                                             |
| DDC_OUT1              | 9   | 7   | O     | DDC signal output. Connects to the video connector side of one of the sync lines                            |
| DDC_OUT2              | 12  | 10  |       |                                                                                                             |
| GND                   | 6   | 4   | —     | Ground                                                                                                      |
| SYNC_IN1              | 13  | 11  | I     | Sync signal buffer input. Connects to the VGA controller side of one of the sync lines                      |
| SYNC_IN2              | 15  | 13  |       |                                                                                                             |
| SYNC_OUT1             | 14  | 12  | O     | Sync signal buffer output. Connects to the video connector side of one of the sync lines                    |
| SYNC_OUT2             | 16  | 14  |       |                                                                                                             |
| V <sub>CC_DDC</sub>   | 7   | 5   | Power | Isolated supply input for the DDC_1 and DDC_2 level-shifting N-FET gates                                    |
| V <sub>CC_SYNC</sub>  | 1   | 15  | Power | Isolated supply input for the SYNC_1 and SYNC_2 level-shifters and their associated ESD protection circuits |
| V <sub>CC_VIDEO</sub> | 2   | 16  | Power | Supply pin specifically for the VIDEO_1, VIDEO_2 and VIDEO_3 ESD protection circuits                        |
| VIDEO1                | 3   | 1   | ESD   | High-speed ESD clamp input                                                                                  |
| VIDEO2                | 4   | 2   |       |                                                                                                             |
| VIDEO3                | 5   | 3   |       |                                                                                                             |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                                        |                        |                                                                    |                    | MIN  | MAX                   | UNIT |
|----------------------------------------|------------------------|--------------------------------------------------------------------|--------------------|------|-----------------------|------|
| Supply voltage                         | V <sub>CC_VIDEO</sub>  |                                                                    |                    | −0.5 | 6                     | V    |
|                                        | V <sub>CC_DDC</sub>    |                                                                    |                    | −0.5 | 6                     |      |
|                                        | V <sub>CC_SYNC</sub>   |                                                                    |                    | −0.5 | 6                     |      |
| IO voltage                             | V <sub>IO(VIDEO)</sub> | VIDEOx pins                                                        |                    | −0.5 | V <sub>CC_VIDEO</sub> | V    |
| Input voltage                          | V <sub>I(SYNC)</sub>   | SYNC pins                                                          |                    | −0.5 | V <sub>CC_SYNC</sub>  | V    |
|                                        | V <sub>I(DDC)</sub>    | DDC_INx pins                                                       |                    | −0.5 | 6                     | V    |
| Output voltage                         | V <sub>O(DDC)</sub>    | DDC_INx pins                                                       |                    | −0.5 | 6                     | V    |
| Input clamp current                    | I <sub>IK</sub>        | SYNC_INx, DDC_INx, VIDEOx                                          | V <sub>I</sub> < 0 | −50  |                       | mA   |
| Output clamp current                   | I <sub>OK</sub>        | SYNC_OUTx, DDC_OUTx                                                | V <sub>O</sub> < 0 | −50  |                       | mA   |
| Continuous output current              | I <sub>O</sub>         | SYNC_OUTx                                                          |                    | −24  | 24                    | mA   |
|                                        |                        | DDC_INx to DDC_OUTx                                                |                    | −5   | 5                     | mA   |
| Continuous current through supply pins |                        | V <sub>CC_VIDEO</sub> , V <sub>CC_SYNC</sub> , V <sub>CC_DDC</sub> |                    | −50  | 50                    | mA   |
| Storage temperature                    | T <sub>stg</sub>       |                                                                    |                    | −55  | 125                   | °C   |

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 6.2 ESD Ratings

|                         |                         |                                                                                | VALUE                                         | UNIT   |   |
|-------------------------|-------------------------|--------------------------------------------------------------------------------|-----------------------------------------------|--------|---|
| TPD7S019 in RSV Package |                         |                                                                                |                                               |        |   |
| V <sub>(ESD)</sub>      | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | All pins except 1, 2, 3, 4, 7, 10, 12, and 14 | ±2000  | V |
|                         |                         |                                                                                | Pins 1, 2, 3, 7, 10, 12, and 14               | ±15000 |   |
|                         |                         |                                                                                | Pin 4                                         | ±2000  |   |
|                         |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> |                                               | ±1000  |   |
|                         |                         | IEC 61000-4-2 contact discharge                                                | Pins 1, 2, 3, 7, 10, 12, and 14               | ±8000  |   |
| TPD7S019 in DBQ Package |                         |                                                                                |                                               |        |   |
| V <sub>(ESD)</sub>      | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | All pins except 3, 4, 5, 6, 9, 12, 14, and 16 | ±2000  | V |
|                         |                         |                                                                                | Pins 3, 4, 5, 9, 12, 14, and 16               | ±15000 |   |
|                         |                         |                                                                                | Pin 6                                         | ±2000  |   |
|                         |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> |                                               | ±1000  |   |
|                         |                         | IEC 61000-4-2 contact discharge                                                | Pins 3, 4, 5, 9, 12, 14, and 16               | ±8000  |   |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                       |                 |              | MIN | MAX             | UNIT |
|-----------------------|-----------------|--------------|-----|-----------------|------|
| Supply voltage        | $V_{CC\_VIDEO}$ |              | 0   | 5.5             | V    |
|                       | $V_{CC\_DDC}$   |              | 0   | 5.5             |      |
|                       | $V_{CC\_SYNC}$  |              | 0   | 5.5             |      |
| IO voltage            | $V_{IO(VIDEO)}$ | VIDEOx pins  | 0   | $V_{CC\_VIDEO}$ | V    |
| Input voltage         | $V_{I(SYNC)}$   | SYNC pins    | 0   | $V_{CC\_SYNC}$  | V    |
|                       | $V_{I(DDC)}$    | DDC_INx pins | 0   | 5.5             | V    |
| Output voltage        | $V_{O(DDC)}$    | DDC_INx Pins | 0   | 5.5             | V    |
| Operating temperature | $T_A$           |              | –40 | 85              | °C   |

### 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TPD7S019   |            | UNIT |
|-------------------------------|----------------------------------------------|------------|------------|------|
|                               |                                              | DBQ (SSOP) | RSV (UQFN) |      |
|                               |                                              | 16 PINS    | 16 PINS    |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 115.8      | 124.5      | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 67         | 52.7       | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 58.3       | 53.8       | °C/W |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   | 19.9       | 1.4        | °C/W |
| $\Psi_{JB}$                   | Junction-to-board characterization parameter | 57.9       | 53.8       | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | N/A        | N/A        | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

### 6.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

| PARAMETER        |                                                                       | TEST CONDITIONS                                                                                | MIN  | TYP  | MAX   | UNIT |
|------------------|-----------------------------------------------------------------------|------------------------------------------------------------------------------------------------|------|------|-------|------|
| $I_{CC\_VIDEO}$  | $V_{CC\_VIDEO}$ supply current                                        | $V_{CC\_VIDEO} = 5\text{ V}$ , VIDEO inputs at $V_{CC\_VIDEO}$ or GND                          |      | 1    | 10    | μA   |
| $I_{CC\_DDC}$    | $V_{CC\_DDC}$ supply current                                          | $V_{CC\_DDC} = 5\text{ V}$                                                                     |      | 1    | 10    | μA   |
| $I_{CC\_SYNC}$   | $V_{CC\_SYNC}$ supply current                                         | $V_{CC\_SYNC} = 5\text{ V}$<br>SYNC inputs at GND or $V_{CC\_SYNC}$ ,<br>SYNC outputs unloaded |      | 1    | 50    | μA   |
|                  |                                                                       | SYNC inputs at 3 V;<br>SYNC outputs unloaded                                                   |      |      | 2     | mA   |
| $I_{IO\_VIDEO}$  | VIDEO input and output pins                                           | $V_{IO\_VIDEO} = 3\text{ V}$                                                                   |      | 0.01 | 1     | μA   |
| $I_{OFF}$        | DDC pin power down leakage current                                    | $V_{CC\_DDC} \leq 0.4\text{ V}$ , $V_{DDC\_OUT} = 5\text{ V}$                                  |      | 0.01 | 1     | μA   |
| $V_D$            | Diode forward voltage for lower clamp of VIDEO, DDC, SYNC output pins | $I_D = 8\text{ mA}$ , lower clamp diode                                                        | –0.6 | –0.8 | –0.95 | V    |
| $R_{DYN\_VIDEO}$ | Dynamic resistance (VIDEO pins)                                       | $I = 1\text{ A}$                                                                               |      | 1    |       | Ω    |
| $V_{IH}$         | High-level SYNC logic input voltage                                   | $V_{CC\_SYNC} = 5\text{ V}$                                                                    | 2    |      |       | V    |
| $V_{IL}$         | Low-level SYNC logic input voltage                                    | $V_{CC\_SYNC} = 5\text{ V}$                                                                    |      |      | 0.6   | V    |
| $V_{OH}$         | High-level SYNC logic output voltage                                  | $I_{OH} = 0\text{ mA}$ , $V_{CC\_SYNC} = 5\text{ V}$                                           | 4.85 |      |       | V    |
| $V_{OH}$         | High-level SYNC logic output voltage                                  | $I_{OH} = -24\text{ mA}$ , $V_{CC\_SYNC} = 5\text{ V}$                                         | 2    |      |       | V    |
| $V_{OL}$         | Low-level SYNC logic output voltage                                   | $I_{OL} = 0\text{ mA}$ , $V_{CC\_SYNC} = 5\text{ V}$                                           |      |      | 0.15  | V    |
| $V_{OL}$         | Low-level SYNC logic output voltage                                   | $I_{OL} = 24\text{ mA}$ , $V_{CC\_SYNC} = 5\text{ V}$                                          |      |      | 0.8   | V    |
| $R_T$            | SYNC driver output resistance                                         | $V_{CC\_SYNC} = 5\text{ V}$ , SYNC inputs at GND or 3 V                                        |      | 15   |       | Ω    |
| $C_{IO\_VIDEO}$  | IO capacitance of VIDEO pins                                          | $V_{IO} = 2.5\text{ V}$ , test frequency is 1 MHz                                              |      | 2.5  | 4     | pF   |
| $t_{PLH}$        | SYNC driver L => H propagation delay                                  | $C_L = 50\text{ pF}$ ; $V_{CC} = 5\text{ V}$ , input $t_R$ and $t_F \leq 5\text{ ns}$          |      |      | 12    | ns   |
| $t_{PHL}$        | SYNC driver H => L propagation delay                                  | $C_L = 50\text{ pF}$ ; $V_{CC} = 5\text{ V}$ , input $t_R$ and $t_F \leq 5\text{ ns}$          |      |      | 12    | ns   |
| $t_R, t_F$       | SYNC driver output rise & fall times                                  | $C_L = 50\text{ pF}$ ; $V_{CC} = 5\text{ V}$ , input $t_R$ and $t_F \leq 5\text{ ns}$          |      | 4    |       | ns   |

**TPD7S019**


SLLSE33E – AUGUST 2010–REVISED DECEMBER 2016

[www.ti.com](http://www.ti.com)**Electrical Characteristics (continued)**

over operating free-air temperature range (unless otherwise noted)


| PARAMETER       |                                    | TEST CONDITIONS       | MIN | TYP | MAX | UNIT |
|-----------------|------------------------------------|-----------------------|-----|-----|-----|------|
| V <sub>BR</sub> | VIDEO ESD diode break-down voltage | I <sub>O</sub> = 1 mA | 9   |     |     | V    |

## 6.6 Typical Characteristics

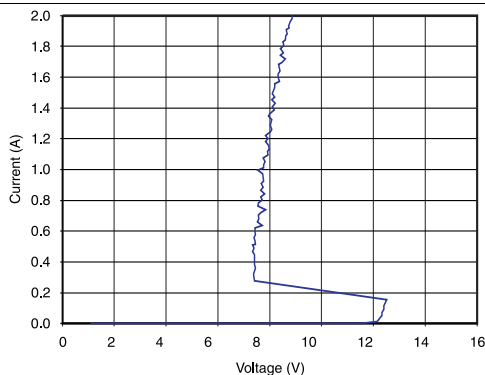


$T_{rf} = 10$  ns


**Figure 1. TPD7S019-xx TLP VID1 to GND, Barth**

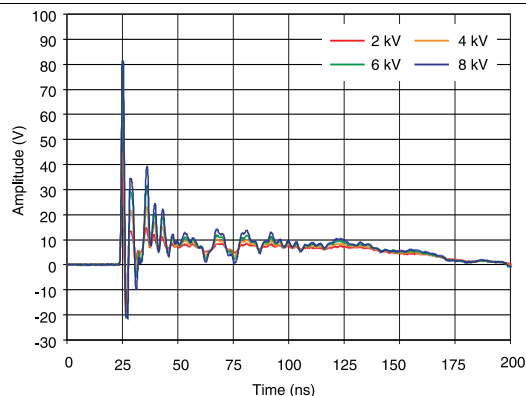

**Figure 2. TPD7S019-xx IEC Clamping Waveforms Positive Contact**

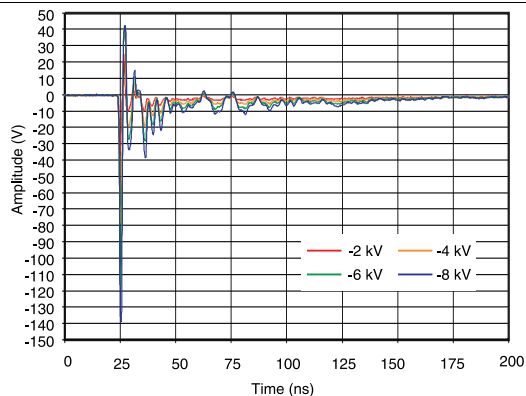


**Figure 3. TPD7S019-xx IEC Clamping Waveforms Negative Contact**

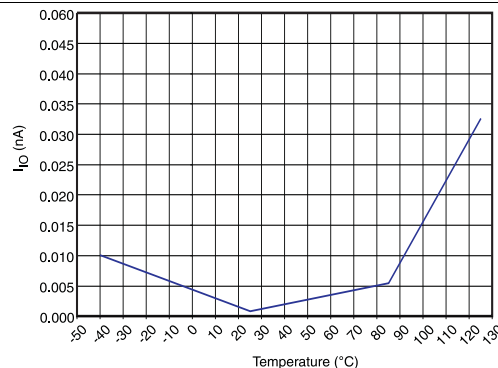

$V_{CC\_VIDEO} = 5$  V

**Figure 4. Leakage Current through VIDEO Pins**

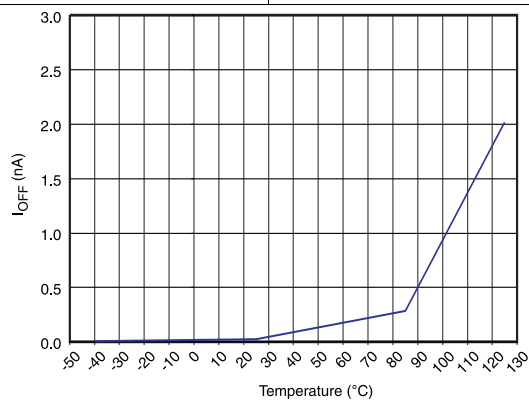

$V_{CC\_DDC} = 0$  V

**Figure 5.  $I_{OFF}$  (DDC\_OUTx)**


## 7 Detailed Description

### 7.1 Overview

The TPD7S019 is an integrated protection solution for VGA or DVI-I ports by providing high-speed ESD protection, level-shifting and signal buffering. The TVS protection diodes for VIDEO signals, DDC signals and SYNC signals provide robust ESD clamping that meets the IEC61000-4-2 standard for  $\pm 8$ -kV contact stress. The signals run at high speed is minimally affected by the low capacitance added to each signal line. The integrated level-shifters for the DDC signals help save external ICs. Two buffers on the HSYNC and VSYNC signals convert TTL input level to CMOS output level, and it saves external components by integrating series termination resistors connected to the SYNC\_OUT pin. The TPD7S019 takes in three signal rails to make the signals compatible with different voltages on VIDEO, DDC and SYNC. The two package options provide the latitude to choose between either small board area or easier layout and better signal integrity.

The end applications of this device include desktop and laptop PCs, set top boxes, TVs, and monitors.

### 7.2 Functional Block Diagram

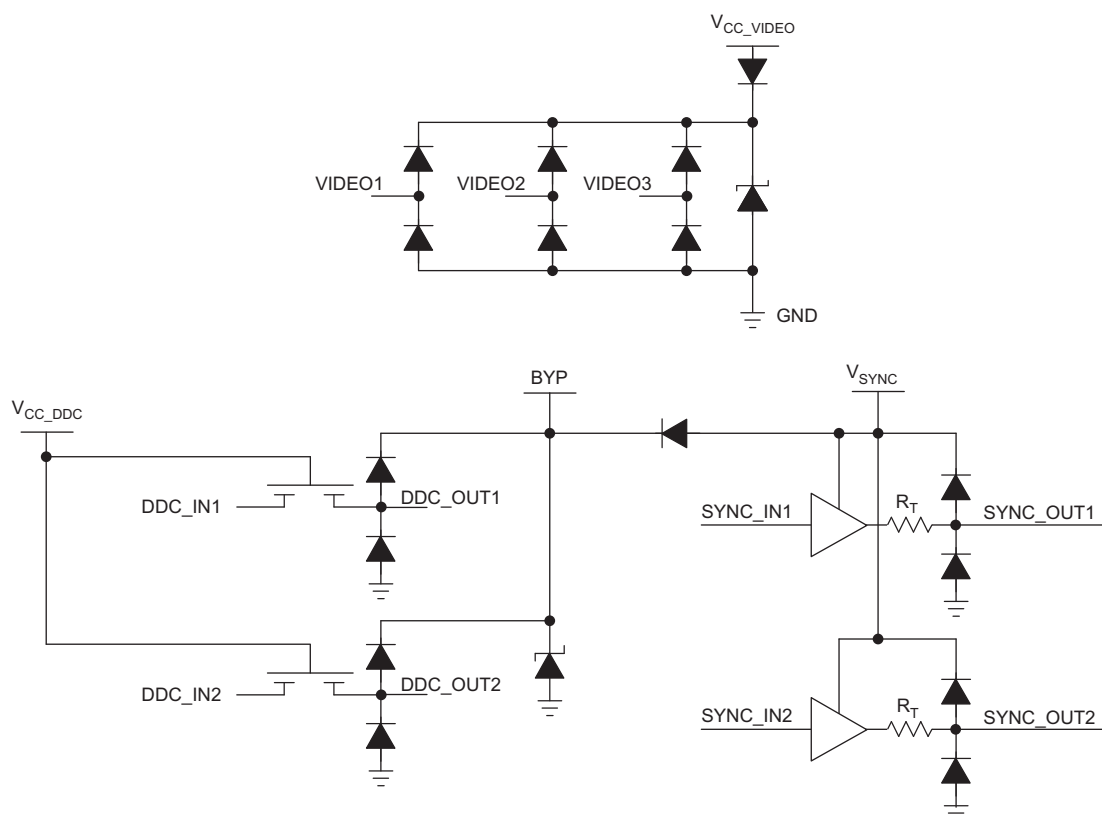

Copyright © 2016, Texas Instruments Incorporated

### 7.3 Feature Description

The TPD7S019 is an integrated protection solution for VGA and DVI-I ports. It has the low capacitance ESD TVS diodes for the VIDEO signals to ensure high speed data transmission. Level-shifting on the DDC lines translate signals on the cable to the level can be processed by downstream ICs. Buffers on the SYNC lines condition the signal levels and quality. The integrated termination resistors help reduce external devices. The TPD7S019 exceeds IEC61000-4-2 (Level 4) ESD standard of  $\pm 8$ -kV contact discharge, making the system robust against system level ESD. The two package options provide the freedom to choose between a compact package or a flow through package.



## 7.4 Device Functional Modes

DDC level translators and SYNC signal buffers are active and the ESD cells on all the lines are untriggered when the recommended operating conditions are met. The bidirectional voltage-level translators provide noninverting level-shifting from the system side to the connector side. Each connector side pin has an ESD clamp that triggers when voltages are above  $V_{BR}$  or below the lower diode's  $V_f$ . During ESD events, voltages as high as  $\pm 8$ -kV (contact ESD) can be directed to ground through the internal diode network. Once the voltages on the protected line fall below these trigger levels (usually within 10s of nano-seconds), these pins revert to a non-conductive state.

## 8 Application and Implementation


### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 8.1 Application Information

When a system contains a human interface connector, it becomes vulnerable to large system-level ESD strikes that standard ICs cannot survive. The TPD7S019 provides IEC61000-4-2 Level 4 Contact ESD rating to the VGA or DVI-I port. The integrated voltage level-shifting, buffering and termination reduce the board space needed to implement the control lines functions.

### 8.2 Typical Application

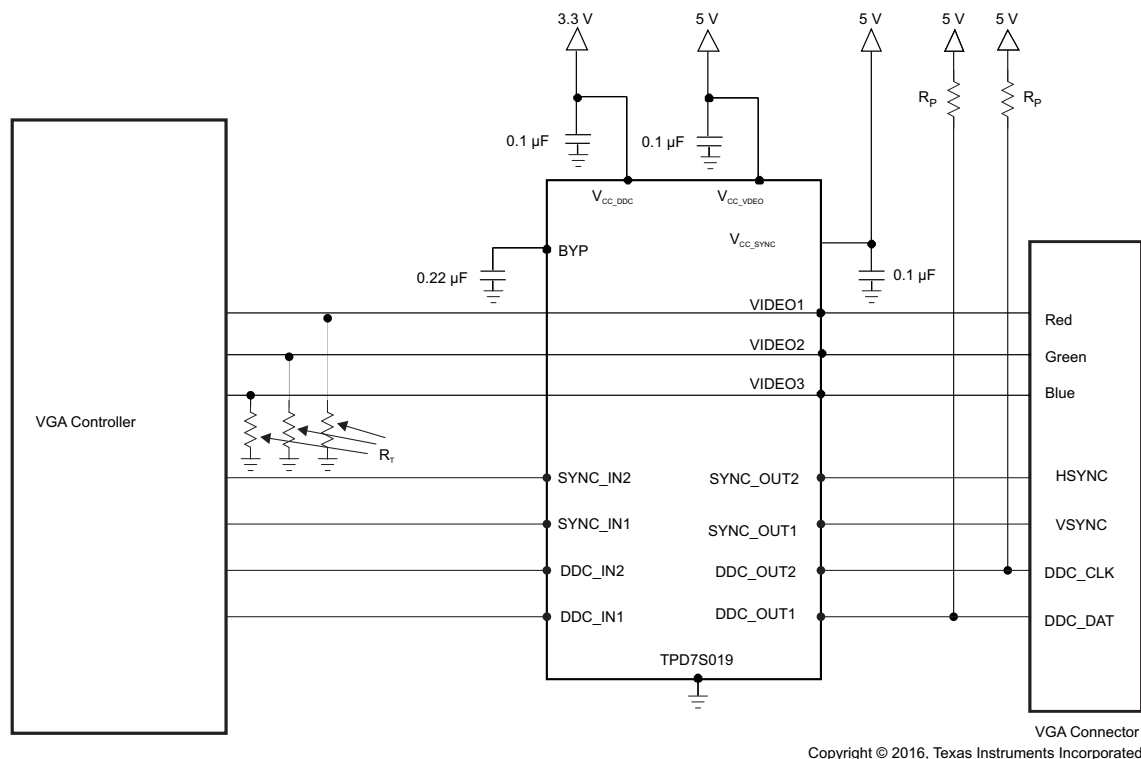

**Figure 6. Typical Application Schematic with TPD7S019**

#### 8.2.1 Design Requirements

In this application, the TPD7S019 is used to protect the VGA port. [Table 1](#) lists the system parameters.

**Table 1. Design Parameters**

| DESIGN PARAMETER                      | VALUE             |
|---------------------------------------|-------------------|
| Pull-up resistors on DDC lines        | 1.5 kΩ to 2 kΩ    |
| Termination resistors on VIDEO lines  | 50 Ω to 75 Ω      |
| VIDEO signals data rate               | 24 MHz to 388 MHz |
| Required IEC 61000-4-2 ESD Protection | ±8-kV Contact     |

## 8.2.2 Detailed Design Procedure

To begin the design process, some parameters must be decided upon; the designer must make sure:

- Voltage range on the protected line must not exceed the reverse standoff voltage of the TVS diode(s) ( $V_{RWM}$ )
- Operating frequency is supported by the I/O capacitance  $C_{IO}$  of the TVS diode
- IEC 61000-4-2 protection requirement is covered by the IEC performance of the TVS diode


For this application, the DDC signals switch between 0 V and 5 V (with resistor pulling it up to 5-V power supply). The VIDEO and SYNC signal levels are between 0 V and  $V_{CC\_VIDEO} / V_{CC\_SYNC}$ . All signals are not exceeding the recommended values and the ESD cells on these pins stay untriggered.

Depending on the resolution and the refresh rate of the display, the VIDEO (RGB) signals' bandwidth can be from 24 MHz to 388 MHz. The line capacitances from the ESD cells are 2.5 pF typical which is only takes up a small portion of the total capacitance budget for the maximum frequency in this range.


±8-kV Contact ESD provided by the TPD7S019 meets the ESD design goal of ±8 kV contact.

Put 1.5-k $\Omega$  to 2-k $\Omega$  pullup resistor on the DDC lines to be compliant with the I<sup>2</sup>C standard. Termination resistors on VIDEO lines are 50  $\Omega$  to 75  $\Omega$  to match the impedance on board trace.

## 8.2.3 Application Curves

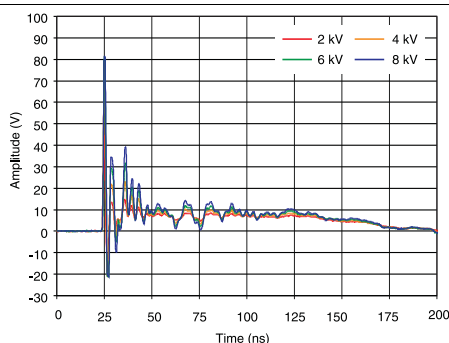

**Figure 7. IEC 61000-4-2 Clamping Voltage, Positive Contact**

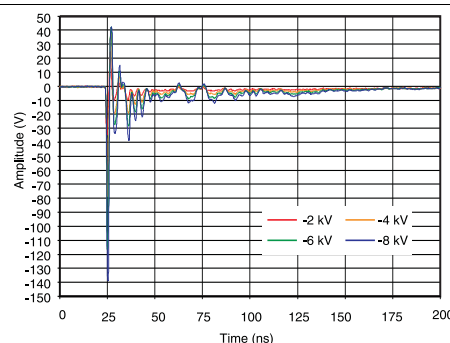

**Figure 8. IEC 61000-4-2 Clamping Voltage, Negative Contact**

## 9 Power Supply Recommendations

The TPD7S019 has three power supply pins:  $V_{CC\_DDC}$ ,  $V_{CC\_SYNC}$  and  $V_{CC\_VIDEO}$ . Depending on the system, the recommended voltage level of these three power supplies can be as high as 5.5 V.

## 10 Layout

### 10.1 Layout Guidelines

The optimum placement of this device is as close to the connector as possible. EMI during an ESD event can couple from the trace being struck to other nearby unprotected traces, resulting in early system failures. Therefore, the PCB designer needs to minimize the possibility of EMI coupling by keeping any unprotected traces away from the protected traces which are between the TVS and the connector.

Route the protected traces as straight as possible.

Avoid using VIAs between the connector and an I/O protection pin on the TPD7S019.


Avoid 90° turns in traces since electric fields tend to build up on corners, increasing EMI coupling.

Minimize impedance on the path to GND for maximum ESD dissipation.

The capacitors on  $V_{CC\_VIDEO}$ ,  $V_{CC\_DDC}$  and  $V_{CC\_SYNC}$  must be placed close to their respective pins.

The VIDEO lines internal protection circuits are the same and thus these pins are interchangeable for routing.

### 10.2 Layout Example

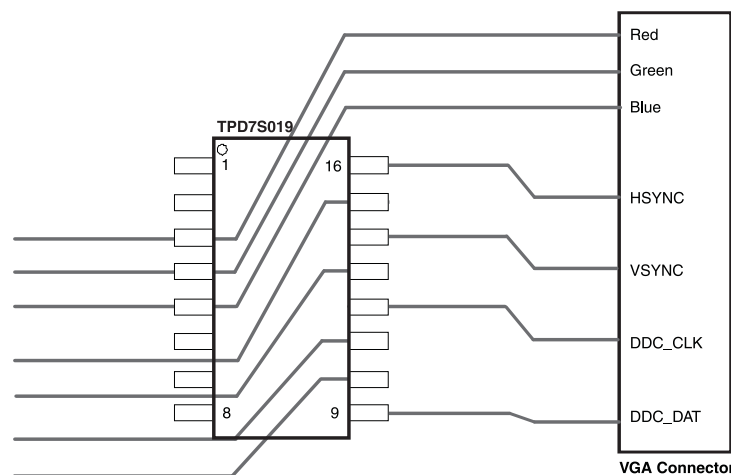

**Figure 9. Simplified Layout with TPD7S019 (Only IO Lines are Shown)**

## 11 Device and Documentation Support

### 11.1 Documentation Support

#### 11.1.1 Related Documentation

For related documentation see the following:

- [Reading and Understanding an ESD Protection Datasheet](#)
- [ESD Layout Guide](#)

### 11.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](http://ti.com). In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 11.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 11.4 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 11.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 11.6 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| TPD7S019-15DBQR  | ACTIVE        | SSOP         | DBQ                | 16   | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 85    | PQ19-15                 | <a href="#">Samples</a> |
| TPD7S019-15RSVR  | ACTIVE        | UQFN         | RSV                | 16   | 3000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAUAG             | Level-1-260C-UNLIM   | -40 to 85    | ZUS                     | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.


(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

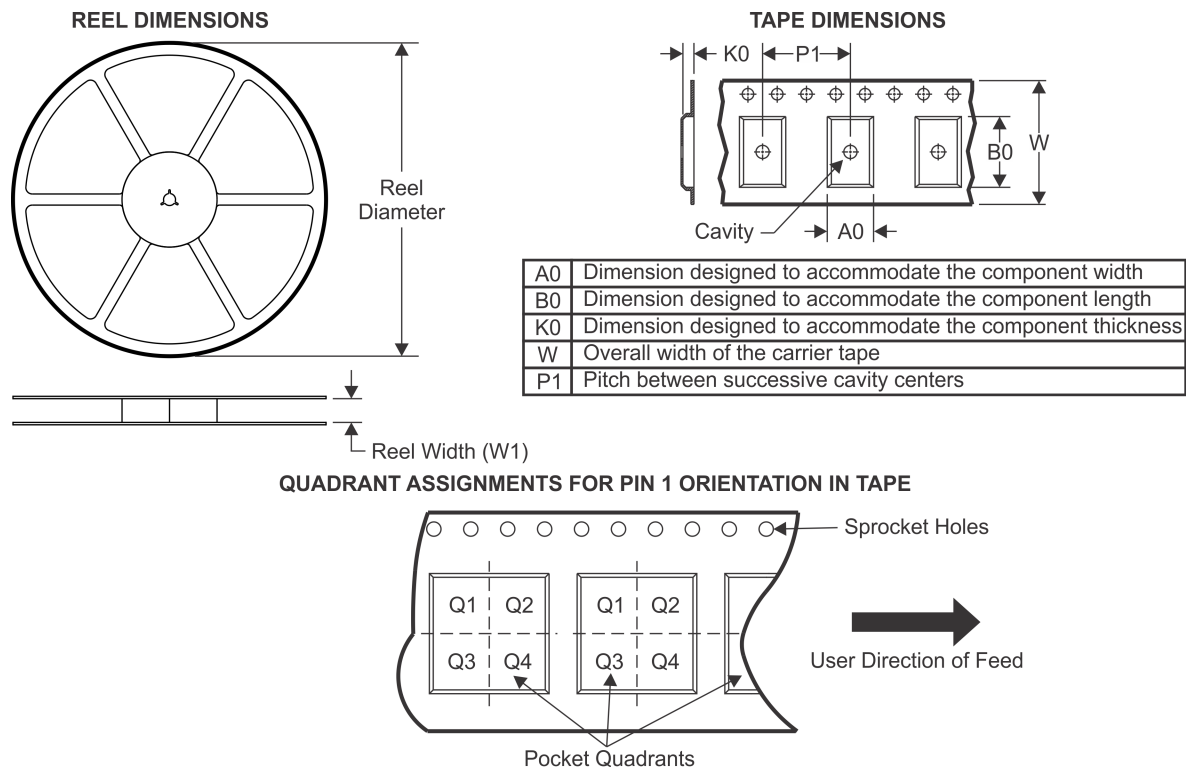
**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPD7S019-15DBQR | SSOP         | DBQ             | 16   | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TPD7S019-15RSVR | UQFN         | RSV             | 16   | 3000 | 177.8              | 12.4               | 2.0     | 2.8     | 0.7     | 4.0     | 12.0   | Q1            |



## TAPE AND REEL BOX DIMENSIONS

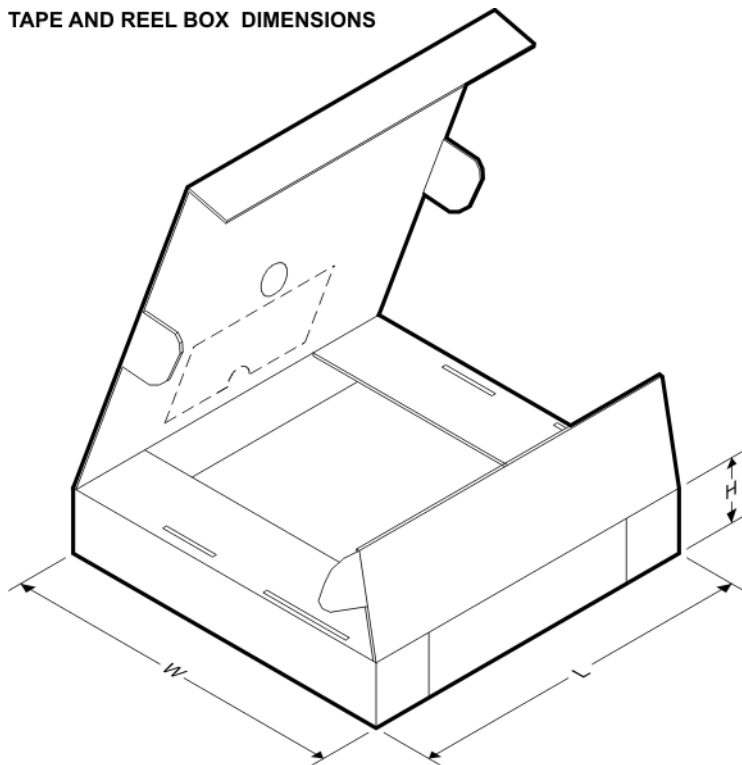


\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPD7S019-15DBQR | SSOP         | DBQ             | 16   | 2500 | 340.5       | 338.1      | 20.6        |
| TPD7S019-15RSVR | UQFN         | RSV             | 16   | 3000 | 183.0       | 183.0      | 20.0        |

RSV (R-PUQFN-N16)

PLASTIC QUAD FLATPACK NO-LEAD

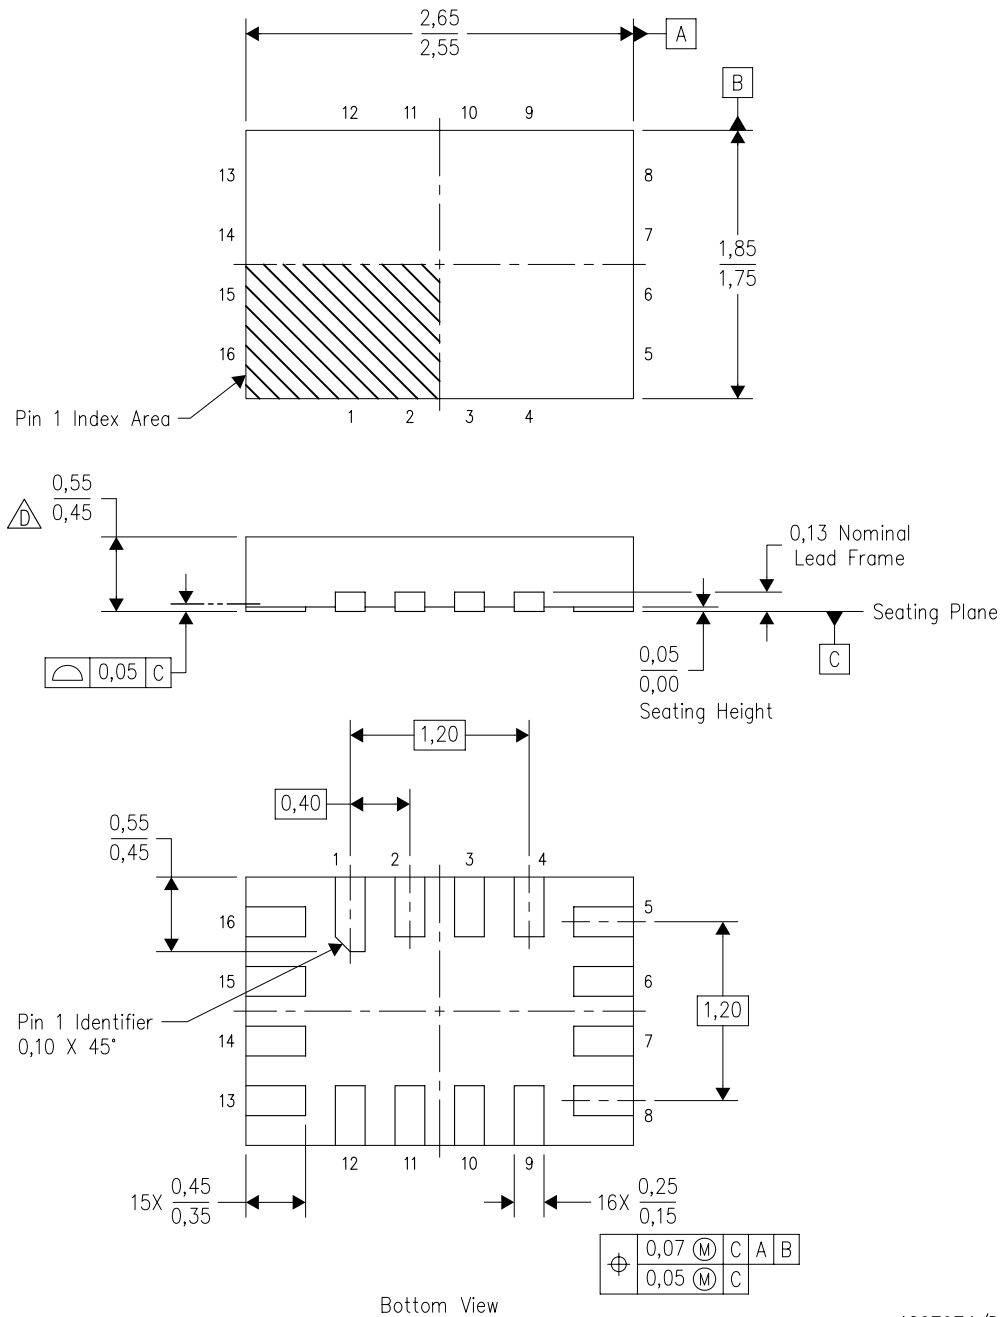


4207974/D 12/11


- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. QFN (Quad Flatpack No-Lead) package configuration.
  - This package complies to JEDEC MO-288 variation UFHE, except minimum package thickness.

RSV (R-PUQFN-N16)


PLASTIC QUAD FLATPACK NO-LEAD

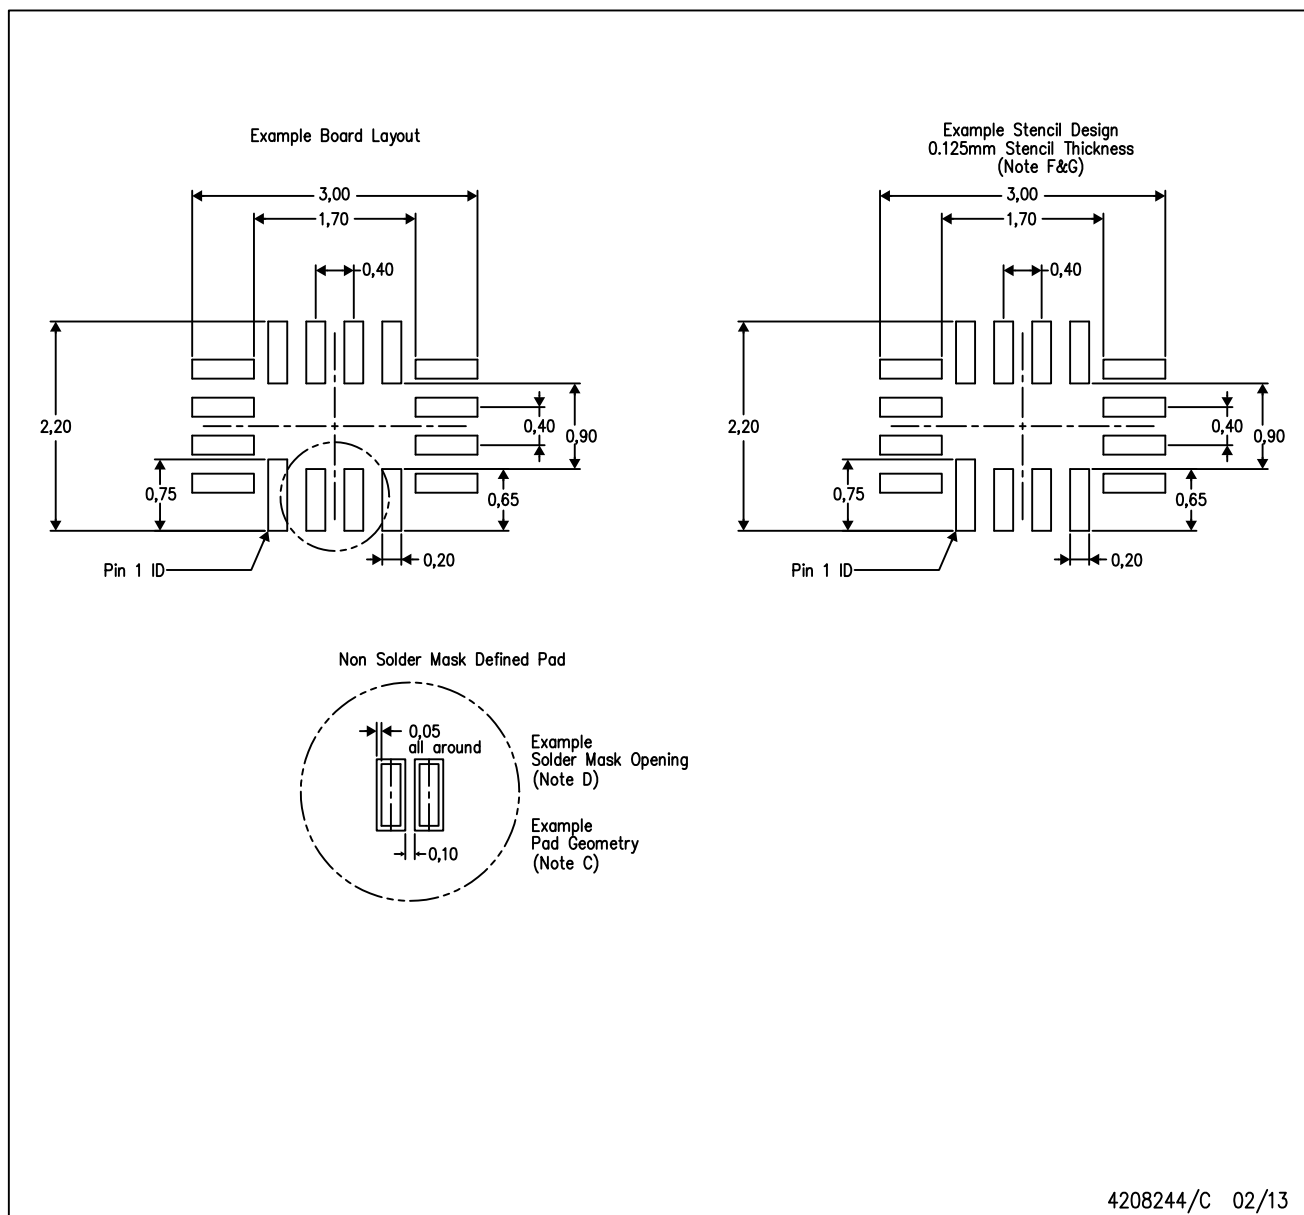

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.
  - E. Maximum stencil thickness 0,127 mm (5 mils). All linear dimensions are in millimeters.
  - F. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - G. Side aperture dimensions over-print land for acceptable area ratio > 0.66. Customer may reduce side aperture dimensions if stencil manufacturing process allows for sufficient release at smaller opening.

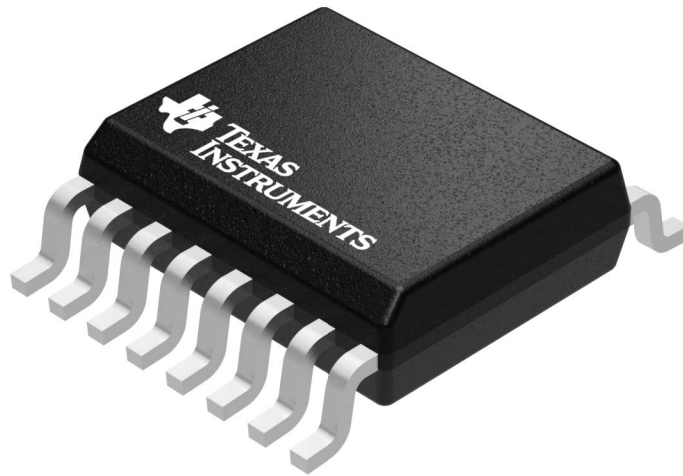

Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.




**DBQ0016A**

# PACKAGE OUTLINE

**SSOP - 1.75 mm max height**

SHRINK SMALL-OUTLINE PACKAGE

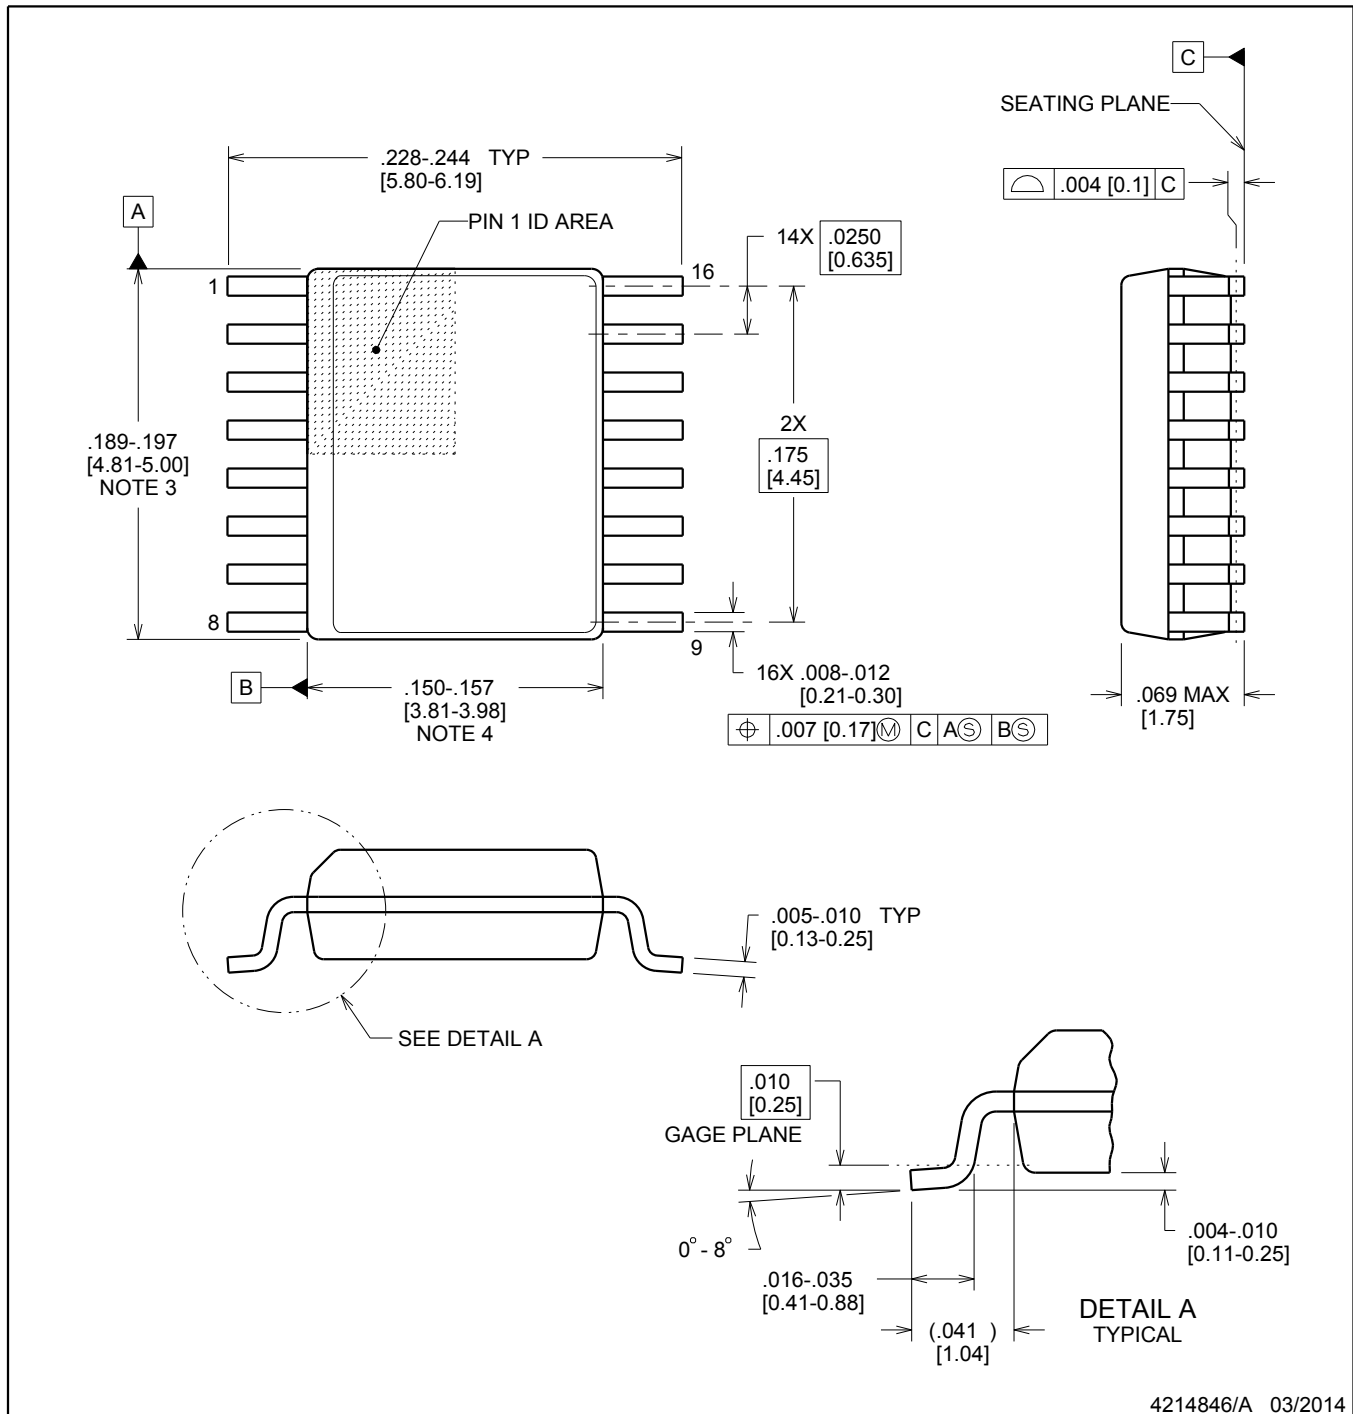

4214846/A 03/2014

## NOTES:


- Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- This drawing is subject to change without notice.
- This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 inch, per side.
- This dimension does not include interlead flash.
- Reference JEDEC registration MO-137, variation AB.

# EXAMPLE BOARD LAYOUT



DBQ0016A

SSOP - 1.75 mm max height

SHRINK SMALL-OUTLINE PACKAGE

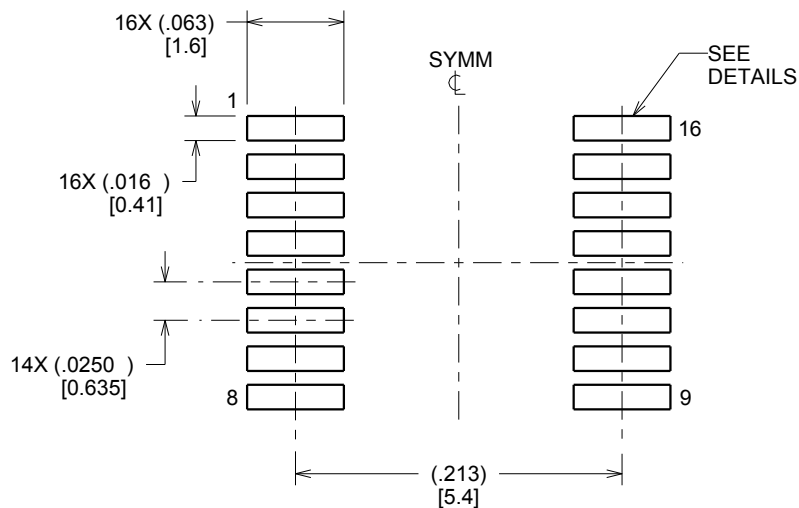

LAND PATTERN EXAMPLE  
SCALE:8X

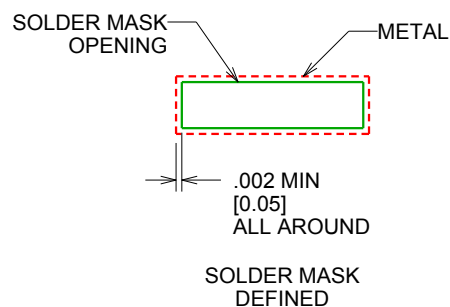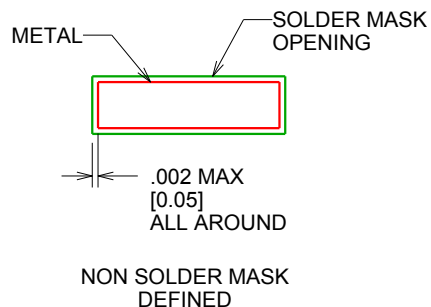

SOLDER MASK DETAILS

4214846/A 03/2014

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

DBQ0016A

SSOP - 1.75 mm max height

SHRINK SMALL-OUTLINE PACKAGE

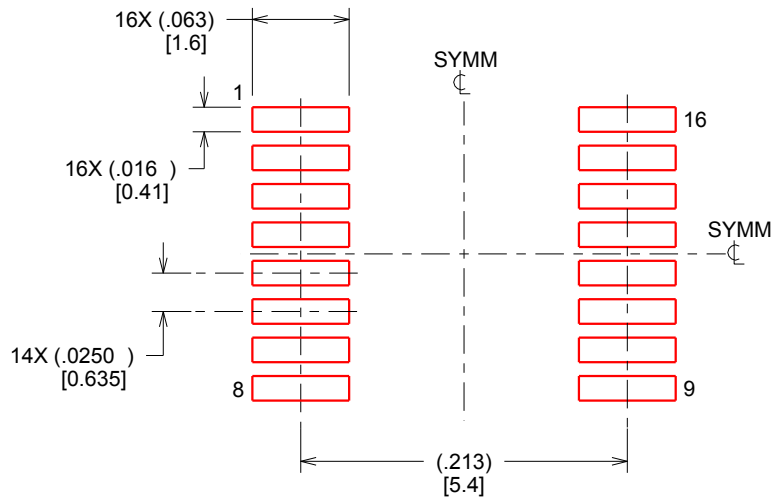

SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.127 MM] THICK STENCIL  
SCALE:8X

4214846/A 03/2014

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE

Texas Instruments Incorporated (TI) reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

TI's published terms of sale for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>) apply to the sale of packaged integrated circuit products that TI has qualified and released to market. Additional terms may apply to the use or sale of other types of TI products and services.

Reproduction of significant portions of TI information in TI data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such reproduced documentation. Information of third parties may be subject to additional restrictions. Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyers and others who are developing systems that incorporate TI products (collectively, "Designers") understand and agree that Designers remain responsible for using their independent analysis, evaluation and judgment in designing their applications and that Designers have full and exclusive responsibility to assure the safety of Designers' applications and compliance of their applications (and of all TI products used in or for Designers' applications) with all applicable regulations, laws and other applicable requirements. Designer represents that, with respect to their applications, Designer has all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. Designer agrees that prior to using or distributing any applications that include TI products, Designer will thoroughly test such applications and the functionality of such TI products as used in such applications.

TI's provision of technical, application or other design advice, quality characterization, reliability data or other services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using TI Resources in any way, Designer (individually or, if Designer is acting on behalf of a company, Designer's company) agrees to use any particular TI Resource solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

Designer is authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY DESIGNER AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Unless TI has explicitly designated an individual product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949 and ISO 26262), TI is not responsible for any failure to meet such industry standard requirements.

Where TI specifically promotes products as facilitating functional safety or as compliant with industry functional safety standards, such products are intended to help enable customers to design and create their own applications that meet applicable functional safety standards and requirements. Using products in an application does not by itself establish any safety features in the application. Designers must ensure compliance with safety-related requirements and standards applicable to their applications. Designer may not use any TI products in life-critical medical equipment unless authorized officers of the parties have executed a special contract specifically governing such use. Life-critical medical equipment is medical equipment where failure of such equipment would cause serious bodily injury or death (e.g., life support, pacemakers, defibrillators, heart pumps, neurostimulators, and implantables). Such equipment includes, without limitation, all medical devices identified by the U.S. Food and Drug Administration as Class III devices and equivalent classifications outside the U.S.

TI may expressly designate certain products as completing a particular qualification (e.g., Q100, Military Grade, or Enhanced Product). Designers agree that it has the necessary expertise to select the product with the appropriate qualification designation for their applications and that proper product selection is at Designers' own risk. Designers are solely responsible for compliance with all legal and regulatory requirements in connection with such selection.

Designer will fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of Designer's non-compliance with the terms and provisions of this Notice.