

# Legacy NMA2412-A1T 10 MHz to 2000 MHz



## Specifications

|                                  |                    |
|----------------------------------|--------------------|
| RF Frequency                     | 10 MHz to 2000 MHz |
| Noise Output                     | 81 dB Min ENR      |
| Noise Spectral Density ( $N_o$ ) | -93 dBm/Hz Min     |
| Noise Power (N)                  | 0 dBm min          |
| Flatness                         | 3 dB P-P Max       |
| Peak Factor                      | 5:1                |
| Bias Voltage                     | 15 V               |
| Supply Current                   | 350 mA Max         |
| Impedance                        | 50 ohms            |

## Package and Connectivity


|                |           |
|----------------|-----------|
| Construction   | Coaxial   |
| Package Type   | T Package |
| Connector Type | SMA(f)    |

## Environmental

|                       |               |
|-----------------------|---------------|
| Operating Temperature | -30 to 85 °C  |
| Storage Temperature   | -65 to 125 °C |

## Notes

Option Standard No TTL

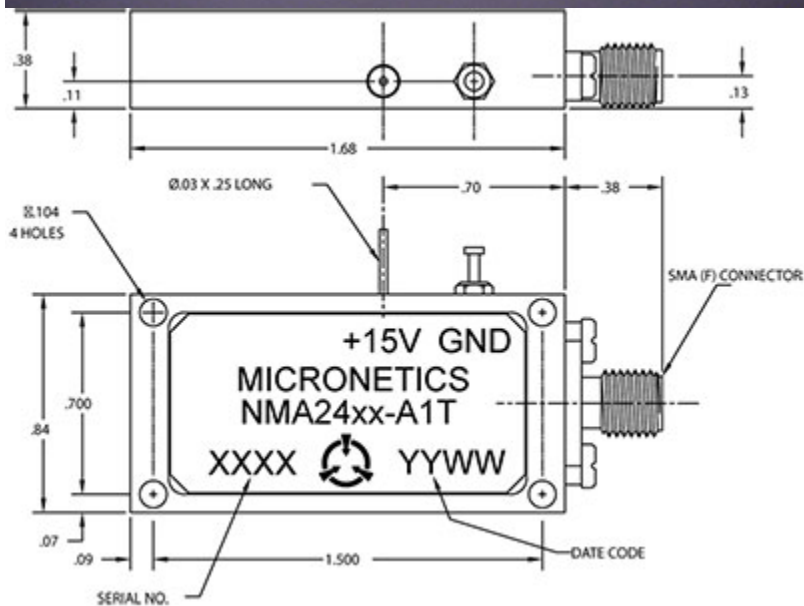

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | [www.Micronetics.com](http://www.Micronetics.com)

# MICRONETICS

