




# 14W 120V AC 572mm Linear LED Module

AC LED Technology by Lynk Labs  
Compatible with Phase-cut Dimmers  
5 yr. Warranty

## Specifications

Drive Voltage:	120Vac (100-132V Min-Max)
AC Current:	120 mA @25°C typical; 145 mA max
Power Dissipation:	14W typical; 18W max
Power Factor:	>0.97
THD:	<20%
Life:	50,000 Hrs
Luminous Flux:	1167 lm @3000K
Luminous Efficacy:	83 LPW ±10% @3000K
Viewing Angle:	120 deg
Operating Temp:	-25°C to +100°C
Storage Temp:	-40°C to +100°C
Soldering Temp:	370°C

Line voltage AC LED modules are easy to use, offering direct connectivity and effectively replacing traditional lamp technologies. Patented AC LED technology eliminates the need for an AC-DC driver.

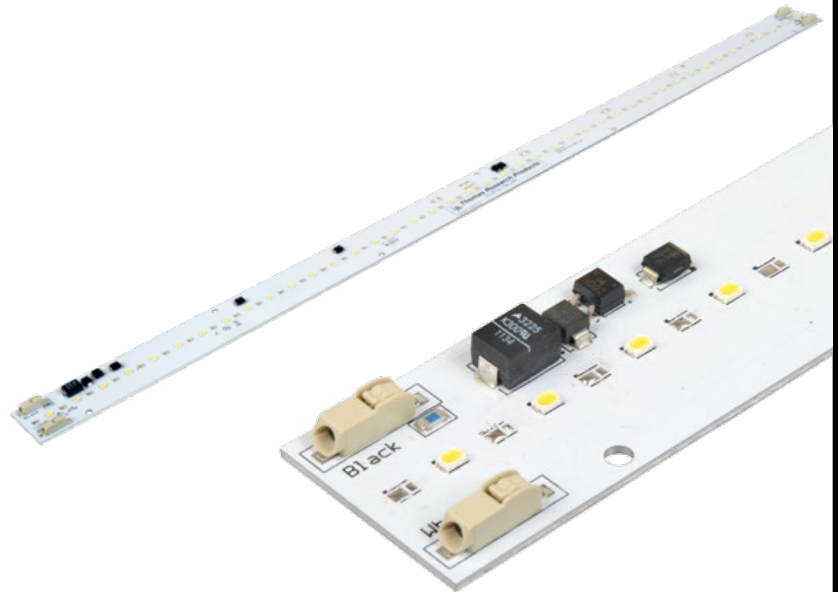

## Features

- Direct 120V line connection
- Compatible with most existing leading edge or trailing edge phase cut AC Dimmers
- High Power Efficiency
- Significant Energy Savings
- Reliable, fast and easy
- Durable Light Source
- Long Operating Life
- Releasable Poke-in Connectors


## Applications

- Troffer Replacement
- Fluorescent Tube Replacement
- Indoor/Outdoor General Line-voltage Illumination
- Ideal for commercial, hospitality or residential

572mm 120V AC Linear LED Module 14W					
Model Number	Input Power (W)	Input Voltage (Vac)	Color Temp (K)	Lumens (±10%)	LPW
99041	14	120	2200	1097	78
99266	14	120	2700	1143	82
99042	14	120	3000	1167	83
99267	14	120	3500	1190	85
99043	14	120	4000	1213	87
99044	14	120	5000	1237	88
99045	14	120	5700	1248	89

## Dimensions:

572 ±0.254 mm L x 28.6 ±0.254mm W x 4.8 mm H

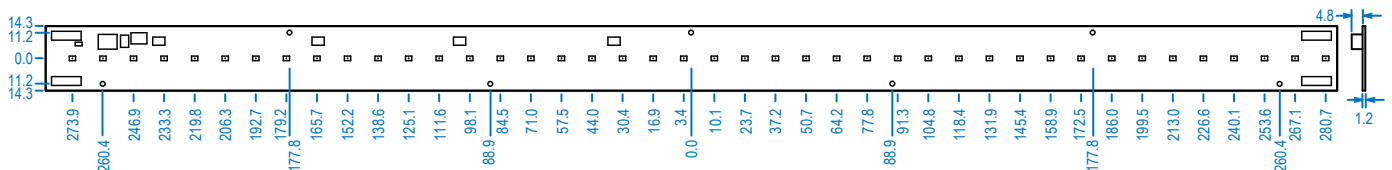

Modules can be daisy-chained, limit of 10m per chain.




Specifications subject to change without notice. Trademarks are property of their respective owners.

Rev 4-9-15

**CIE Chromaticity Coordinates:**

**White Binning Structure Graphical Representation**

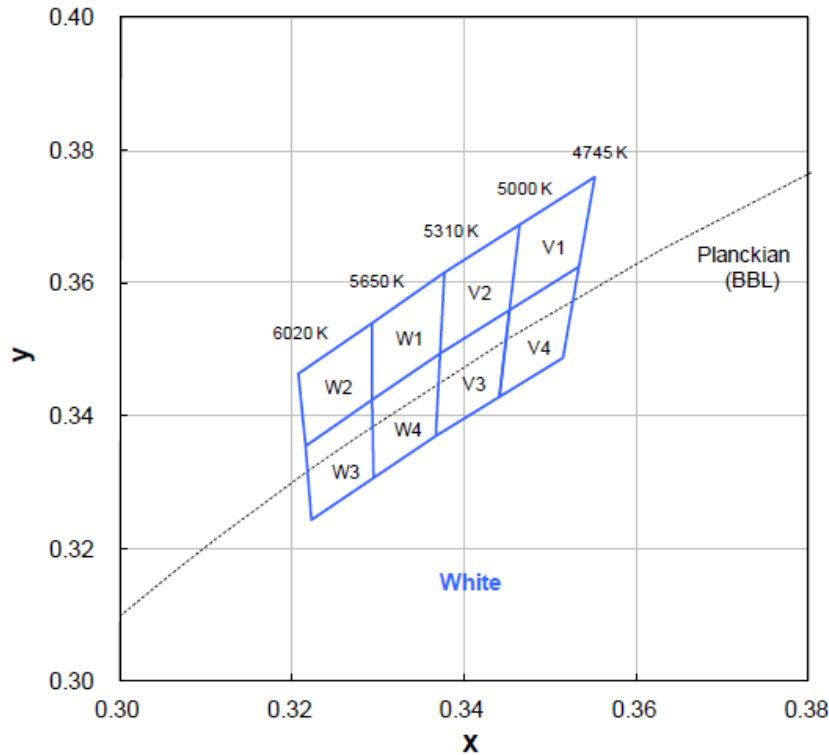


**White Bin Structure**

Bin Code	x	y	Typ. CCT (K)	Bin Code	x	y	Typ. CCT (K)
V1	0.346	0.369	4870	W1	0.329	0.354	5475
	0.355	0.376			0.338	0.362	
	0.353	0.362			0.337	0.349	
V4	0.345	0.356	4870	W4	0.329	0.342	5475
	0.345	0.356			0.329	0.342	
	0.353	0.362			0.337	0.349	
	0.352	0.349			0.337	0.337	
V2	0.344	0.343	5155	W2	0.329	0.331	5830
	0.338	0.362			0.321	0.346	
	0.346	0.369			0.329	0.354	
	0.345	0.356			0.329	0.342	
V3	0.337	0.349	5155	W3	0.322	0.335	5830
	0.337	0.349			0.322	0.335	
	0.345	0.356			0.329	0.342	
	0.344	0.343			0.329	0.331	
	0.337	0.337			0.322	0.324	

● Tolerance on each color bin (x , y) is ± 0.01

**Neutral White Binning Structure Graphical Representation**

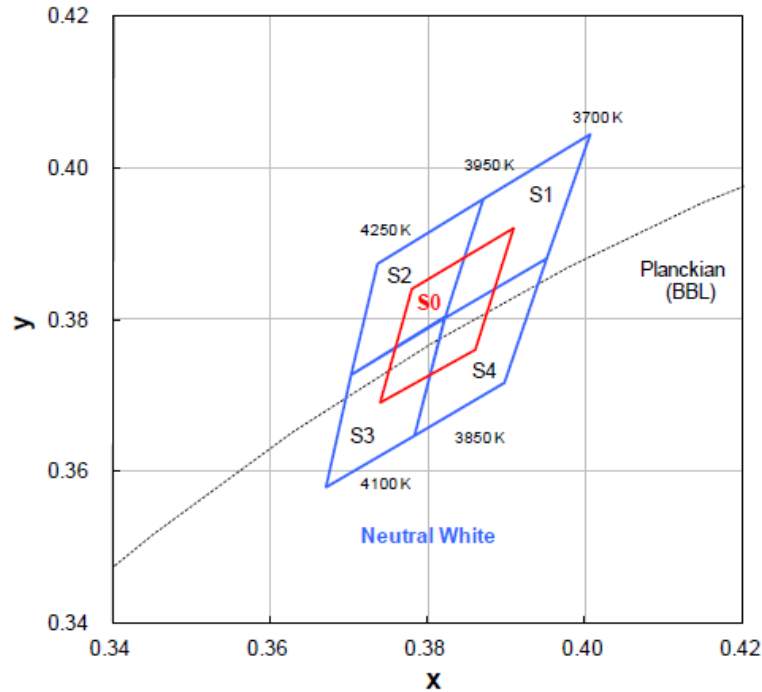


**Neutral White Bin Structure**

Bin Code	x	y	Typ. CCT (K)	Bin Code	x	y	Typ. CCT (K)
S1	0.387	0.396	3825	S2	0.374	0.387	4100
	0.401	0.404			0.387	0.396	
	0.395	0.388			0.382	0.380	
	0.382	0.380			0.370	0.373	
S4	0.382	0.380	3825	S3	0.370	0.373	4100
	0.395	0.388			0.382	0.380	
	0.390	0.372			0.378	0.365	
	0.378	0.365			0.367	0.358	
S0	0.374	0.369	3975				
	0.378	0.384					
	0.391	0.392					
	0.386	0.376					

- Tolerance on each color bin (x , y) is ± 0.01

**Warm White Binning Structure Graphical Representation**

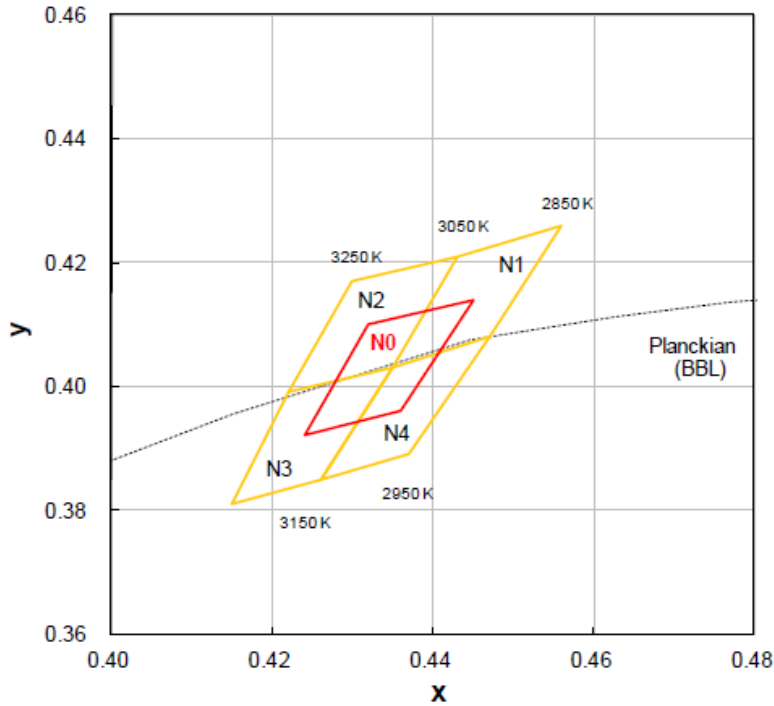

**Warm White Bin Structure**


Bin Code	x	y	Typ. CCT (K)	Bin Code	x	y	Typ. CCT (K)
N1	0.443	0.421	2950	N2	0.430	0.417	3150
	0.456	0.426			0.443	0.421	
	0.447	0.408			0.435	0.403	
N4	0.435	0.403	2950	N3	0.422	0.399	3150
	0.447	0.408			0.435	0.403	
	0.437	0.389			0.426	0.385	
	0.426	0.385			0.415	0.381	
N0	0.424	0.392	3050				
	0.432	0.410					
	0.445	0.414					
	0.436	0.396					

- Tolerance on each color bin (x , y) is  $\pm 0.01$




**Typical Electrical & Optical Characteristic Curves:**


**Relative Power / Voltage**

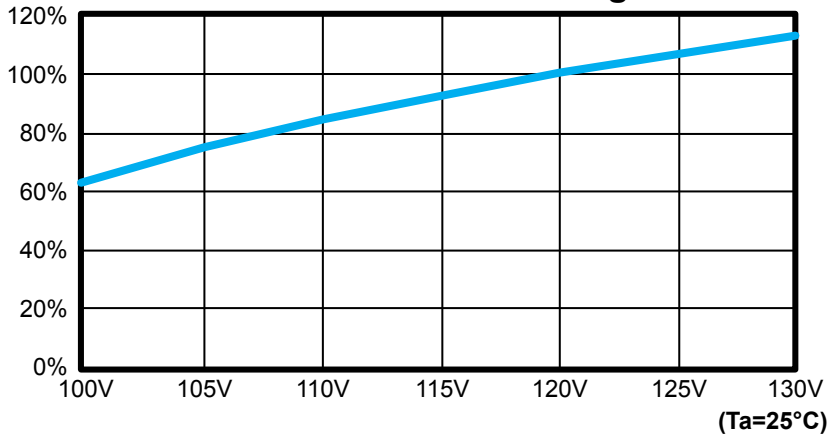

**Relative Luminous Flux / Voltage**


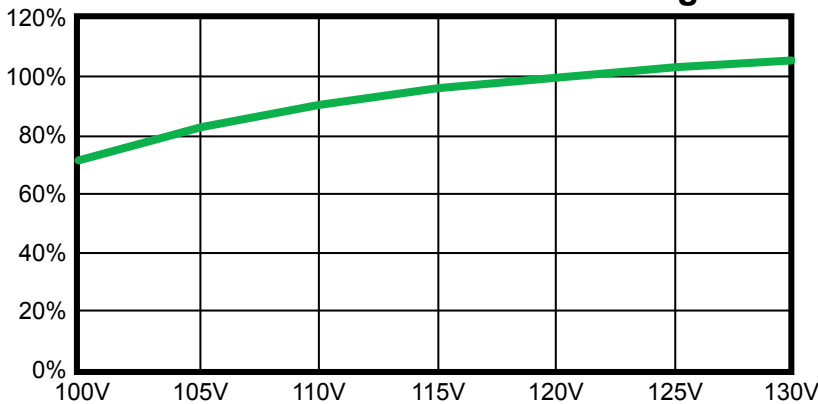


**Lumen Thermal De-Rating Curve**

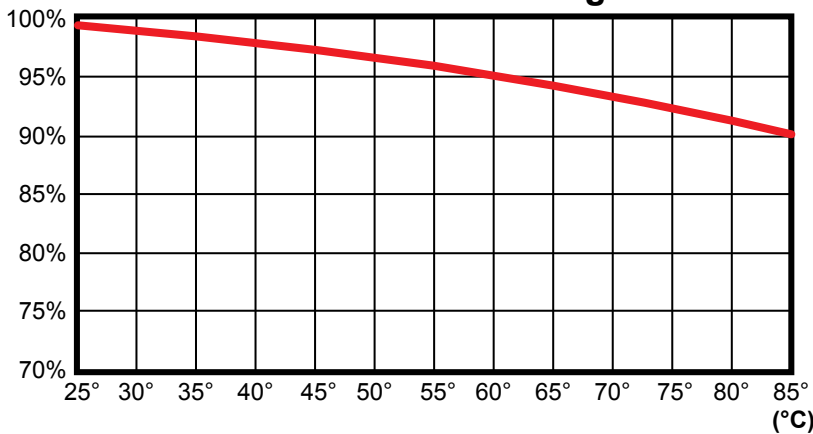


## Typical Electrical & Optical Characteristic Curves:


### 1. White

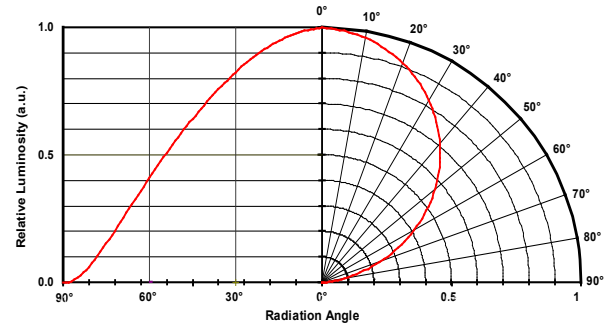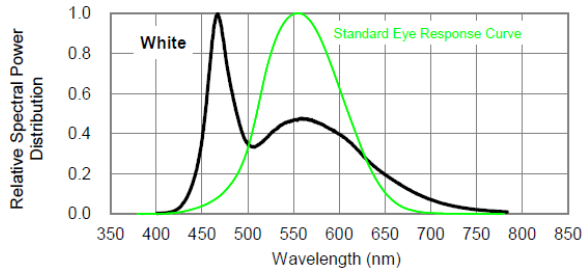

### 2. Neutral White

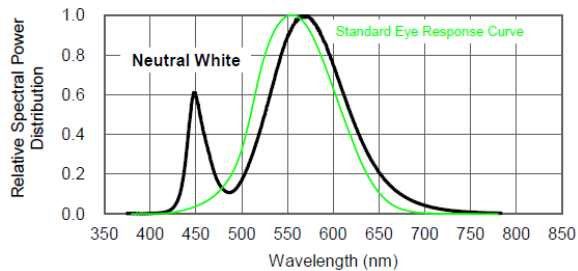

### 3. Warm White

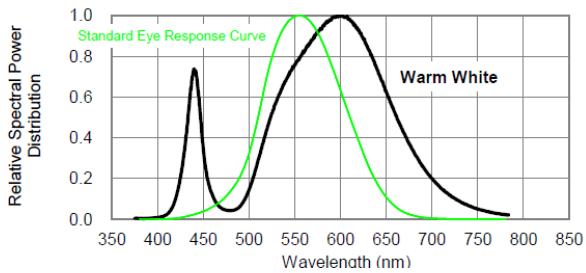

## Packaging

- LED Modules will be packaged in trays for primary protection.
- According to the total delivery amount, cardboard boxes will be used to protect the trays of LED Modules from mechanical shocks during transportation.
- The boxes are not water resistant and therefore must be kept away from water and moisture.

## Reliability and Average Lumen Maintenance

Before releasing new products the manufacturer puts a representative product sample set through an entire suite of qualification tests, including the most stressful test for high power LEDs, the Wet High-Temperature Operating Life (WHTOL) test at 85°C/85%RH for 1000 hours at the specified operating current.

LED lifetime has been extrapolated based on the accumulated operating and accelerated aging data. Based on this data, the manufacturer projects that the LED products will deliver, on average, 70% lumen maintenance at 50,000 hours of operation at the specified operating current, provided that the case temperature is maintained at or below 80°C.