




SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-3	OPEN	2-1




CUIRCUT: SPDT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD
- ▲ 5. PLASTIC MATERIAL: HOUSING: UL-94-V0
ROCKER: UL-94-V0
- ▲ 6. WHITE MARKING AS SHOWN ON BLACK ROCKER.
- ▲ 7. DATE CODE: OPPOSITE SIDE OF LOGO:
YEAR NAD WEEK (EG. 0143=43 WEEK 2001)
8. RATING: 0.4VOLT-AMPS MAX. @20V MAX. AC OR DC
9. ELECTRIC LIFE: 30,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
10. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- ▲ 11. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
12. OPERATING TEMP.: -30°C to 85°C
13. EXTEND ROCKER POST TO 0.63 (WAS 0.45)
AND REMOVE CHAMFER. (2 PL)
14. ▲ DENOTES CRITICAL PARAMETER.

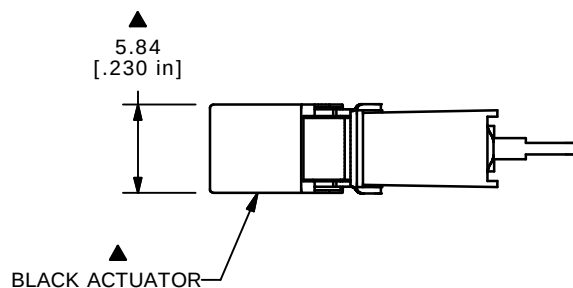

ISOMETRIC

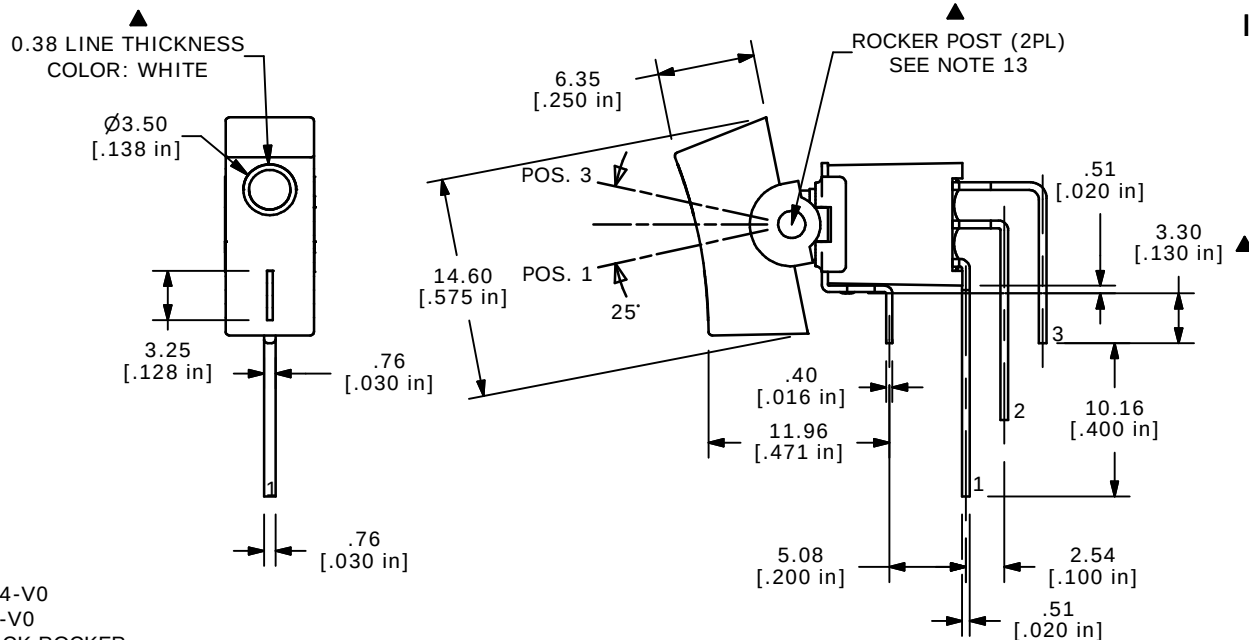**E-SWITCH®**

B	14685	REVISED AND REDRAWN	2/11/05	AR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

<i>E-SWITCH®</i>				
TITLE 400AWMSP1R6BLKM7RE I/O MARKING				
SCALE 2:1	DATE 2/11/05	DR AR	DWG T403013	REV B