


VOLTAGE RANGE: 50 - 1000V
CURRENT: 5.0 A

Features

- Diffused Junction
- Ultra-Fast Switching for High Efficiency
- High Current Capability and Low Forward Voltage Drop
- Surge Overload Rating to 150A Peak
- Low Reverse Leakage Current
- Plastic Material: UL Flammability Classification Rating 94V-0

Mechanical Data

- Case: DO-201AD, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 1.2 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

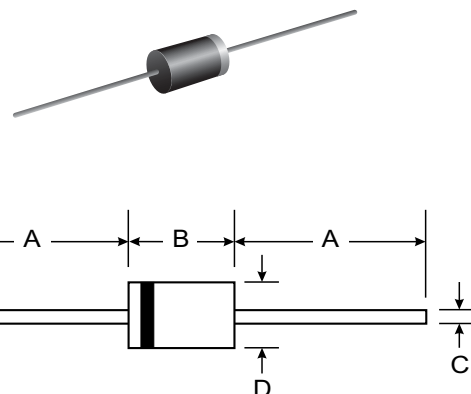

DO-201AD		
Dim	Min	Max
A	25.40	—
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	UF5001	UF5002	UF5003	UF5004	UF5005	UF5006	UF5007	UF5008	Unit
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	300	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	300	400	600	800	1000	V
Maximum Average Forward Rectified Current @ T _A =55 °C	I _(AV)	5.0								A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	I _{FSM}	200								A
Peak Forward Voltage at 5.0A DC	V _F	1.0				1.3	1.7			V
Maximum DC Reverse Current @ T _J =25°C at Rated DC Blocking Voltage @ T _J =100°C	I _R	5.0 100								uA
Maximum Reverse Recovery Time (Note1)	T _{RR}	50					75			nS
Typical Junction Capacitance (Note2)	C _J	75					50			pF
Typical Thermal Resistance (Note3)	R _{JA}	20								°C/W
Operating Temperature Range	T _J	-50 to +125								°C
Storage Temperature Range	T _{STG}	-50 to +150								°C

NOTES: 1. Measured with I_F = 0.5A, I_R = 1A, I_{RR} = 0.25A

2. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC

3. Thermal resistance junction to ambient

FIG. 1 –TYPICAL FORWARD
CURRENT DERATING CURVE

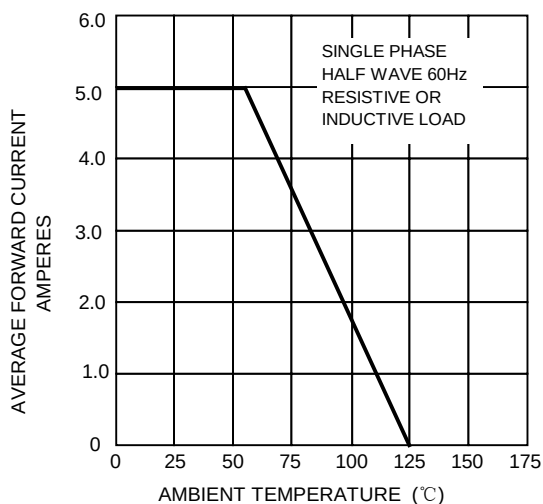


FIG.2 –TYPICAL REVERSE CHARACTERISTICS

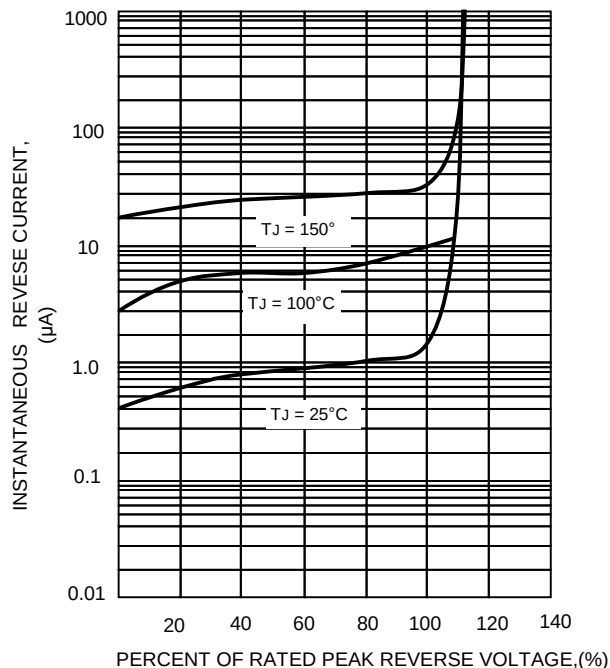


FIG. 4 – MAXIMUM NON-REPETITIVE
FORWARD SURGE CURRENT

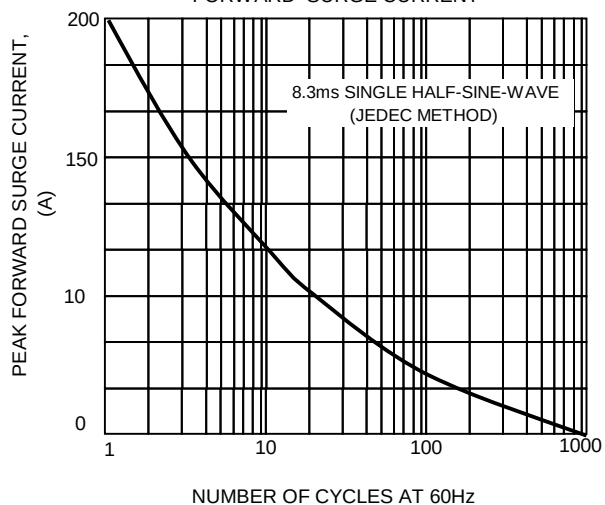


FIG.3-TYPICAL INSTANTANEOUS FORWARD
CHARACTERISTICS

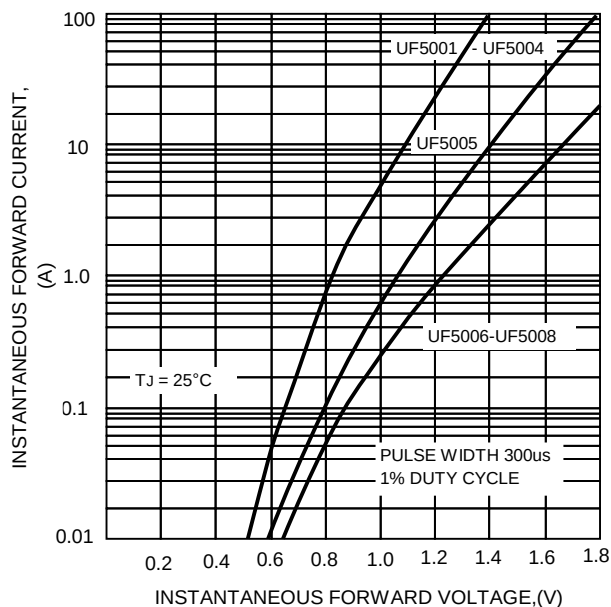


FIG.5 – TYPICAL JUNCTION CAPACITANCE

