
X7R Dielectric

General Specifications



X7R formulations are called “temperature stable” ceramics and fall into EIA Class II materials. X7R is the most popular of these intermediate dielectric constant materials. Its temperature variation of capacitance is within ±15% from -55°C to +125°C. This capacitance change is non-linear.

Capacitance for X7R varies under the influence of electrical operating con-ditions such as voltage and frequency.


X7R dielectric chip usage covers the broad spectrum of industrial applications where known changes in capacitance due to applied voltages are acceptable.


RoHS COMPLIANT


PART NUMBER (SEE PAGE 4 FOR COMPLETE PART NUMBER EXPLANATION)


0805	5	C	103	M	A	T	2	A
Size (L” x W”)	**Voltage** 4V = 4 6.3V = 6 10V = Z 16V = Y 25V = 3 50V = 5 100V = 1 200V = 2 500V = 7	**Dielectric** X7R = C	**Capacitance** Code (In pF) 2 Sig. Digits + Number of Zeros	**Capacitance Tolerance** J = ± 5%* K = ±10% M = ± 20% *≤1µF only, contact factory for additional values	**Failure Rate** A = Not Applicable	**Terminations** T = Plated Ni and Sn Z= FLEXITERM®** *Optional termination **See FLEXITERM® X7R section	**Packaging** 2 = 7” Reel 4 = 13” Reel **Contact Factory For Multiples**	**Special Code** A = Std. Product


NOTE: Contact factory for availability of Termination and Tolerance Options for Specific Part Numbers.
Contact factory for non-specified capacitance values.

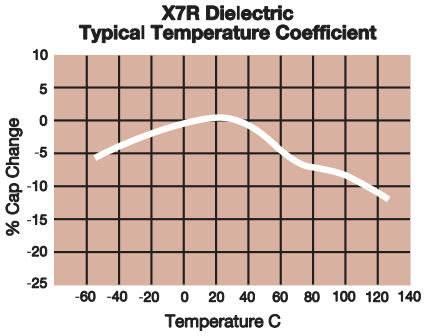


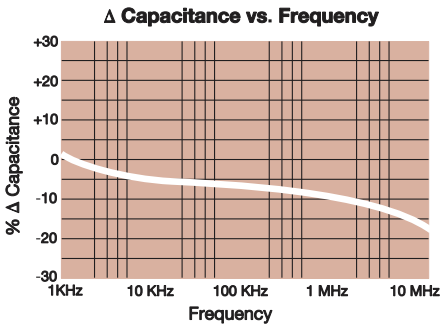

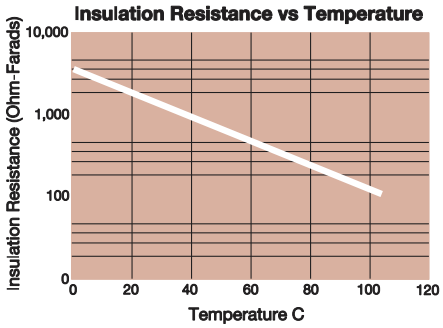

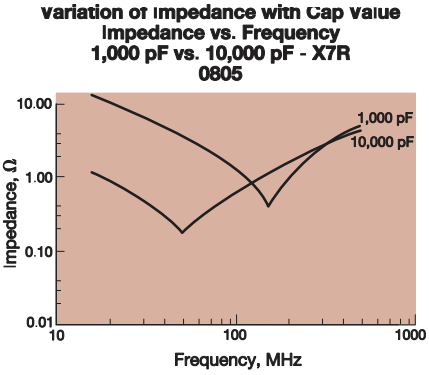

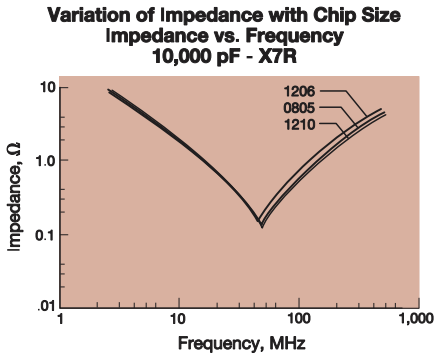

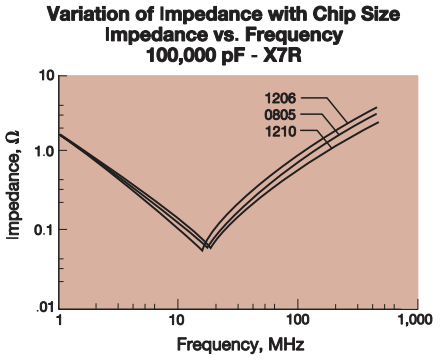

The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

X7R Dielectric

Specifications and Test Methods

Parameter/Test		X7R Specification Limits	Measuring Conditions	
Operating Temperature Range		-55ºC to +125ºC	Temperature Cycle Chamber	
Capacitance		Within specified tolerance	Freq.: 1.0 kHz ± 10% Voltage: 1.0Vrms ± .2V For Cap > 10µF, 0.5Vrm @ 120Hz	
Dissipation Factor		≤ 10% for ≥ 50V DC rating≤ 12.5% for 25V DC rating ≤ 12.5% for 25V and 16V DC rating ≤ 12.5% for ≤ 10V DC rating Contact Factory for DF by PN		
Insulation Resistance		100,000MΩ or 1000MΩ - µF, whichever is less	Charge device with rated voltage for 120 ± 5 secs @ room temp/humidity	
Dielectric Strength		No breakdown or visual defects	Charge device with 250% of rated voltage for 1-5 seconds, w/ charge and discharge current limited to 50 mA (max) Note: Charge device with 150% of rated voltage for 500V devices.	
Resistance to Flexure Stresses	Appearance	No defects	Deflection: 2mm Test Time: 30 seconds	
	Capacitance Variation	≤ ±12%		
	Dissipation Factor	Meets Initial Values (As Above)		
	Insulation Resistance	≥ Initial Value x 0.3		
Solderability		≥ 95% of each terminal should be covered with fresh solder	Dip device in eutectic solder at 230 ± 5ºC for 5.0 ± 0.5 seconds	
Resistance to Solder Heat	Appearance	No defects, <25% leaching of either end terminal	Dip device in eutectic solder at 260ºC for 60 seconds. Store at room temperature for 24 ± 2hours before measuring electrical properties.	
	Capacitance Variation	≤ ±7.5%		
	Dissipation Factor	Meets Initial Values (As Above)		
	Insulation Resistance	Meets Initial Values (As Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Thermal Shock	Appearance	No visual defects	Step 1: -55ºC ± 2º	30 ± 3 minutes
	Capacitance Variation	≤ ±7.5%	Step 2: Room Temp	≤ 3 minutes
	Dissipation Factor	Meets Initial Values (As Above)	Step 3: +125ºC ± 2º	30 ± 3 minutes
	Insulation Resistance	Meets Initial Values (As Above)	Step 4: Room Temp	≤ 3 minutes
	Dielectric Strength	Meets Initial Values (As Above)	Repeat for 5 cycles and measure after 24 ± 2 hours at room temperature	
Load Life	Appearance	No visual defects	Pre-treatment: After mounting, perform heat treatment 150+0/-10C for 2 hour, then stabilise for 24+/-2 hour at room temp, then measure. Charge device with ≥ rated voltage in test chamber set at 125ºC ± 2ºC for 1000 hours (+48, -0). Pre-treatment: After remove from test chamber, perform heat treatment 150+0/-10C for 2 hour, then stabilise for 24+/-2 hour at room temp, then measure. Contact KYOCERA AVX for datasheet of specific parts.	
	Capacitance Variation	≤ ±12.5%		
	Dissipation Factor	≤ Initial Value x 2.0 (See Above)		
	Insulation Resistance	≥ Initial Value x 0.3 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Load Humidity	Appearance	No visual defects	Pre-treatment: After mounting, perform heat treatment 150+0/-10C for 2 hour, then stabilise for 24+/-2 hour at room temp, then measure. Store in a test chamber set at 85ºC ± 2ºC/ 85% ± 5% relative humidity for 1000 hours (+48, -0) with rated voltage applied. Pre-treatment: After remove from test chamber, perform heat treatment 150+0/-10C for 2 hour, then stabilise for 24+/-2 hour at room temp, then measure.	
	Capacitance Variation	≤ ±12.5%		
	Dissipation Factor	≤ Initial Value x 2.0 (See Above)		
	Insulation Resistance	≥ Initial Value x 0.3 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		

The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

X7R Dielectric

Capacitance Range

PREFERRED SIZES ARE SHADED

SIZE		0101*	0201					0402						0603								0805								1206								
Soldering		Reflow Only	Reflow Only					Reflow/Wave						Reflow/Wave								Reflow/Wave								Reflow/Wave								
Packaging		Paper/ Embossed	All Paper					All Paper						All Paper								Paper/Embossed								Paper/Embossed								
(L) Length	mm (in.)	0.40 ± 0.02 (0.016 ± 0.0008)	0.60 ± 0.03 (0.024 ± 0.001)					1.00 ± 0.10 (0.040 ± 0.004)						1.60 ± 0.15 (0.063 ± 0.006)								2.01 ± 0.20 (0.079 ± 0.008)								3.20 ± 0.30 (0.126 ± 0.012)								
W) Width	mm (in.)	0.20 ± 0.02 (0.008 ± 0.0008)	0.30 ± 0.03 (0.011 ± 0.001)					0.50 ± 0.10 (0.020 ± 0.004)						0.81 ± 0.15 (0.032 ± 0.006)								1.25 ± 0.20 (0.049 ± 0.008)								1.60 ± 0.30 (0.063 ± 0.012)								
(t) Terminal	mm (in.)	0.10± 0.04 (0.004 ± 0.0016)	0.15 ± 0.05 (0.006 ± 0.002)					0.25 ± 0.15 (0.010 ± 0.006)						0.35 ± 0.15 (0.014 ± 0.006)								0.50 ± 0.25 (0.020 ± 0.010)								0.50 ± 0.25 (0.020 ± 0.010)								
WVDC		16	6.3	10	16	25	50	6.3	10	16	25	50	100	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	500
Cap	100 101	B	A	A	A	A	A	C	C	C	C	C	C	G	G	G	G	G	G	J	J									G	G	G	G	G	G	N	N	N
(pF)	150 151	B	A	A	A	A	A	C	C	C	C	C	C	G	G	G	G	G	G	J	J									G	G	G	G	G	G	N	N	N
	220 221	B	A	A	A	A	A	C	C	C	C	C	C	G	G	G	G	G	G	J	J	E	E	E	E	E	E	E	J	J	J	J	J	J	J	N	N	P
	330 331	B	A	A	A	A	A	C	C	C	C	C	C	G	G	G	G	G	G	J	J		J	J	J	J	J	J	J	J	J	J	J	J	J	N	N	P
	470 471	B	A	A	A	A	A	C	C	C	C	C	C	G	G	G	G	G	G	J	J		J	J	J	J	J	J	J	J	J	J	J	J	J	N	N	P
	680 681	B	A	A	A	A	A	C	C	C	C	C	C	G	G	G	G	G	G	J	J		J	J	J	J	J	J	J	J	J	J	J	J	J	N	N	P
	1000 102	B	A	A	A	A	A	C	C	C	C	C	C	G	G	G	G	G	G	J	J		J	J	J	J	J	J	J	J	J	J	J	J	J	N	N	P
	1500 152		A	A	A	A		C	C	C	C	C	C	G	G	G	G	G	G	J	J		J	J	J	J	J	J	J	J	J	J	J	J	J	N	N	P
	2200 222		A	A	A	A		C	C	C	C	C	C	G	G	G	G	G	G	J	J		J	J	J	J	J	J	J	J	J	J	J	J	J	N	N	P
	3300 332		A	A	A	A		C	C	C	C	C	C	G	G	G	G	G	G	J	J		J	J	J	J	J	J	J	J	J	J	J	J	J	N	N	P
	3900 392		A	A	A	A																																
	4700 472		A	A	A	A		C	C	C	C	C	C	G	G	G	G	G	G	J	J		J	J	J	J	J	J	J	J	J	J	J	J	J	N	N	P
	5600 562		A	A	A	A																																
	6800 682		A	A	A	A		C	C	C	C	C	C	G	G	G	G	G	G	J	J		J	J	J	J	J	P	P	J	J	J	J	J	J	N	N	P
Cap	0.01 103		A	A	A	A		C	C	C	C	C	C	G	G	G	G	G	G	J	J		J	J	J	J	J	P	P	J	J	J	J	J	J	N	N	P
(µF)	0.012 123																																					
	0.015 153							C	C	C	C	E		G	G	G	G	G	J	J	J		J	J	J	J	J	P	P	J	J	J	J	J	J	N	N	Q
	0.018 183																																					
	0.022 223		A	A	A			C	C	C	C	E		G	G	G	G	G	J	J	J		J	J	J	J	J	P	P	J	J	J	J	J	J	P	P	Q
	0.027 273																																					
	0.033 333							C	C	C	C	E		G	G	G	G	J	J				J	J	J	J	P	P	P	J	J	J	J	J	J	Q	Q	Q
	0.039 393																																					
	0.047 473							C	C	C	C	E		G	G	G	G	J	J				J	J	J	J	P	P	P	J	J	J	J	J	J	Q	Q	Q
	0.068 683							C	C	C	C	E		G	G	G	G	J	J				J	J	J	J	P	P		J	J	J	J	J	P	Q	Q	
	0.082 823																																					
	0.1 104		A					C	C	C	C	E		G	G	G	G	J	J				J	J	J	J	P	P		J	J	J	J	J	P	Q	Q	
	0.12 124																																					
	0.15 154													G	G	G	J	J					N	N	N	N	P			K	K	K	K	K	Q	Q	Q	
	0.22 224							C	C	C	C			G	G	J	J	J					N	N	N	N	P			K	K	K	K	K	Q	Q	Q	
	0.33 334													J	J	J	J	J					P	P	P	P	P			K	K	K	K	N	Q			
	0.47 474							C	C					J	J	J	J	J					P	P	P	P	P			M	M	M	M	X	X			
	0.68 684													J	J	J							P	P	P					M	M	M	M	X	X			
	1.0 105							C						J	J	J	J	K					P	P	P	P				M	M	M	M	X	X			
	2.2 225													J	J	K							P	P	P	P				M	M	M	X	X	X			
	4.7 475													K									P	P	P					X	X	X	X	Z				
	10 106																					P	P	P						X	X	X	X					
	22 226																													X	X							
	47 476																																					
	100 107																																					
WVDC		16	6.3	10	16	25	50	6.3	10	16	25	50	100	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	500
SIZE		0101*	0201					0402						0603								0805								1206								

Letter	A	B	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max. Thickness	0.33 (0.013)	0.22 (0.009)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)
	PAPER						EMBOSSED							


NOTE: Contact factory for non-specified capacitance values
*EIA 01005
**Contact Factory for Specifications

X7R Dielectric

Capacitance Range

PREFERRED SIZES ARE SHADED

SIZE			1210							1812						1825			2220					2225		
Soldering			Reflow Only							Reflow Only						Reflow Only			Reflow Only					Reflow Only		
Packaging			Paper/Embossed							All Embossed						All Embossed			All Embossed					All Embossed		
(L) Length		mm (in.)	3.30 ± 0.4 (0.130± 0.016)							4.50 ± 0.40 (0.177 ± 0.016)						4.50 ± 0.40 (0.177 ± 0.016)			5.70 ± 0.50 (0.224 ± 0.020)					5.70 ± 0.40 (0.224 ± 0.016)		
W) Width		mm (in.)	2.50 ± 0.30 (0.098 ± 0.012)							3.20 ± 0.40 (0.126 ± 0.016)						6.40 ± 0.40 (0.252 ± 0.016)			5.00 ± 0.40 (0.197 ± 0.016)					6.30 ± 0.40 (0.248 ± 0.016)		
(t) Terminal		mm (in.)	0.50 ± 0.25 (0.020 ± 0.010)							0.61 ± 0.36 (0.024 ± 0.014)						0.61 ± 0.36 (0.024 ± 0.014)			0.64 ± 0.39 (0.025 ± 0.015)					0.64 ± 0.39 (0.025 ± 0.015)		
		WVDC	10	16	25	50	100	200	500	16	25	50	100	200	500	50	100	200	25	50	100	200	500	50	100	200
Cap	100	101																								
(pF)	150	151																								
	220	221				K	K	K	M																	
	330	331				K	K	K	M			N	N	N	N											
	470	471				K	K	K	M			N	N	N	N											
	680	681				K	K	K	M			N	N	N	N											
	1000	102	K	K	K	K	K	K	M	N	N	N	N	N	N	X	X	X		X	X	X	X	X	X	X
	1500	152	K	K	K	K	K	K	M	N	N	N	N	N	N	X	X	X		X	X	X	X	X	X	X
	2200	222	K	K	K	K	K	K	M	N	N	N	N	N	N	X	X	X		X	X	X	X	X	X	X
	3300	332	K	K	K	K	K	K	P	N	N	N	N	N	N	X	X	X		X	X	X	X	X	X	X
	4700	472	K	K	K	K	K	K	P	N	N	N	N	N	P	X	X	X		X	X	X	X	X	X	X
	6800	682	K	K	K	K	K	K	P	N	N	N	N	N	P	X	X	X		X	X	X	X	X	X	X
Cap	0.01	103	K	K	K	K	K	K	P	N	N	N	N	N	P	X	X	X		X	X	X	X	X	X	X
(µF)	0.015	153	K	K	K	K	K	K	P	N	N	N	N	N	P	X	X	X		X	X	X	X	X	X	X
	0.022	223	K	K	K	K	K	P	Q	N	N	N	N	N	P	X	X	X		X	X	X	X	X	X	X
	0.033	333	K	K	K	K	K	P	X	N	N	N	N	N	X	X	X	X		X	X	X	X	X	X	X
	0.047	473	K	K	K	K	K	P	X	N	N	N	N	P	X	X	X	X		X	X	X	X	X	X	X
	0.068	683	K	K	K	K	K	P	X	N	N	N	N	P	X	X	X	X		X	X	X	X	X	X	X
	0.1	104	K	K	K	K	K	P	X	N	N	N	P	P	X	X	X	X		X	X	X	X	X	X	X
	0.15	154	K	K	K	M	P	Z	Z	N	N	N	P	P	Z	X	X	X		X	X	X	X	X	X	X
	0.22	224	K	K	K	M	P	Z		N	N	N	P	Q	Z	X	X	X		X	X	X	X	X	X	X
	0.33	334	K	K	K	M	Q	Z		N	N	N	P	X	Z	X	X	X		X	X	X	X	X	X	X
	0.47	474	M	M	M	P	Q	Z		N	N	N	Q	X	Z	X	X	X		X	X	X	X	X	X	X
	0.68	684	M	M	P	X	X	Z		Q	Q	Q	Q	Z		X	X	X		X	X	X	Z	X	X	X
	1.0	105	P	P	P	X	Z			Q	Q	Q	X	Z		X	X	X		X	X	X	7	X	X	X
	1.5	155	N	N	Z	Z	Z				Z	Z	Z			X	X	Z		X	X	Z		X	X	Z
	2.2	225	X	X	Z	Z	Z				Z	Z	Z			X	X	Z		X	X	Z		X	X	Z
	3.3	335	X	X	Z	Z	Z				Z	Z	Z			X	X			X	Z			X	X	
	4.7	475	Z	Z	Z	Z	Z				Z	Z	Z			X	X			Z	Z			X	X	
	10	106	Z	Z	Z	Z				Z	Z	Z				Z	Z			Z	Z			Z	Z	
	22	226	Z	Z	Z														Z							
	47	476	Z																							
	100	107																								
WVDC			10	16	25	50	100	200	500	16	25	50	100	200	500	50	100	200	25	50	100	200	500	50	100	200
SIZE			1210							1812						1825			2220					2225		



Letter	A	B	C	E	G	J	K	M	N	P	Q	X	Y	Z	7
Max. Thickness	0.33 (0.013)	0.22 (0.009)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)	3.30 (0.130)
	PAPER						EMBOSSED								

NOTE: Contact factory for non-specified capacitance values

The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.