TAIWAN SEMICONDUCTOR

RoHS COMPLIANCE

TS13002HV

High Voltage NPN Transistor

TO-92



Pin Definition:
1. Emitter
2. Collector
3. Base

PRODUCT SUMMARY

BV_{CEO}	450V
BV_{CBO}	900V
I_C	0.8A
$V_{CE(SAT)}$	0.6V @ I_C=0.2A, I_B=0.04A


Features

- High Voltage
- High Speed Switching

Structure

- Silicon Triple Diffused Type
- NPN Silicon Transistor

Block Diagram

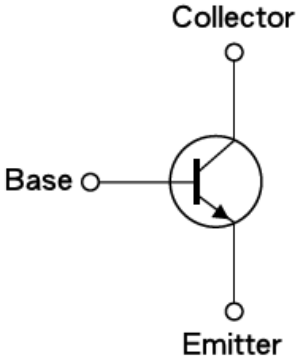

Ordering Information

Part No.	Package	Packing
TS13002HVCT B0G	TO-92	1kpcs / Bulk
TS13002HVCT A3G	TO-92	2kpcs / Ammo

Note: "G" denote for Halogen Free Product

Absolute Maximum Ratings (Ta = 25°C unless otherwise noted)

Parameter		Symbol	Limit	Unit
Collector-Base Voltage		V_{CBO}	900	V
Collector-Emitter Voltage		V_{CEO}	450	V
Emitter-Base Voltage		V_{EBO}	9	V
Collector Current	DC	I_C	0.8	A
	Pulse		1.6	
Maximum Power Dissipation @ T_C = 25°C		P_{tot}	0.8	W
Operating Junction Temperature		T_J	+150	°C
Operating Junction and Storage Temperature Range		T_{STG}	- 55 to +150	°C

Thermal Performance

Parameter	Symbol	Limit	Unit
Junction to Ambient Thermal Resistance	$R\Theta_{JA}$	125	°C/W

TS13002HV
High Voltage NPN Transistor

Electrical Specifications (Ta = 25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Static						
Collector-Base Voltage	I_C =1mA, I_B =0	BV_{CBO}	900	--	--	V
Collector-Emitter Breakdown Voltage	I_C =10mA, I_E =0	BV_{CEO}	450	--	--	V
Emitter-Base Breakdown Voltage	I_E =1mA, I_C =0	BV_{EBO}	9	--	--	V
Collector-Base Cutoff Current	V_{CB} =900V, I_E =0	I_{CBO}	--	--	100	μA
Collector-Emitter Cutoff Current	V_{CE} =450V, I_C = 0	I_{CEO}	--	--	100	μA
Emitter-Base Cutoff Current	V_{EB} =9V, I_C = 0	I_{EBO}	--	--	100	μA
Collector-Emitter Saturation Voltage	I_C=0.2A, I_B=0.04A	$V_{CE(SAT)}$	--	0.2	0.6	V
Base-Emitter Saturation Voltage	I_C=0.2A, I_B=0.04A	$V_{BE(SAT)}$		0.9	1.5	V
DC Current Gain	V_{CE} =5V, I_C =5mA	h_{FE}	15	--	--	
	V_{CE} =5V, I_C =100mA		25	--	40	
	V_{CE} =5V, I_C =300mA		20	--	40	
Dynamic Characteristics						
Frequency	V_{CE} =10V, I_C =0.1A	f_T	5	--	--	MHz
Resistive Load Switching Time (Ratings)						
Rise Time	V_{CC} =125V, I_C =0.1A	t_r	--	--	1	μs
Storage Time	I_{B1}=I_{B2}=20mA	t_{STG}	--	2	5	μs
Fall Time	t_p=25μs, D=≤1%	t_f	--	--	1	μs

Note: pulse test: pulse width ≤300μs, duty cycle ≤2%

TS13002HV
High Voltage NPN Transistor

Electrical Characteristics Curves (Ta = 25°C, unless otherwise noted)

Figure 1. Safe Operation Area

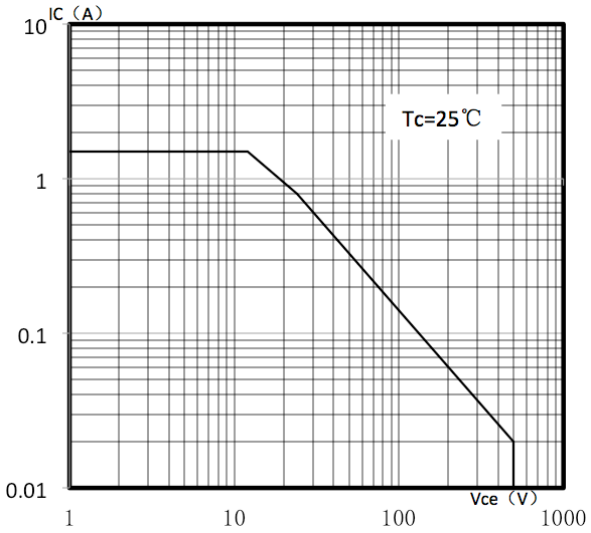


Figure 2. DC Current Gain

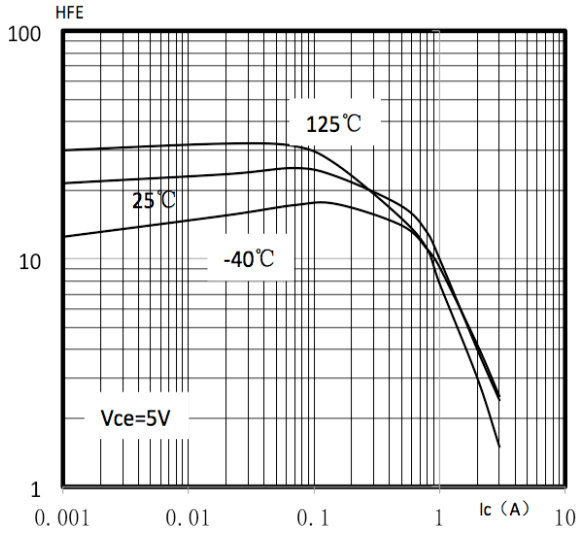


Figure 3. Vce(sat) vs. IC

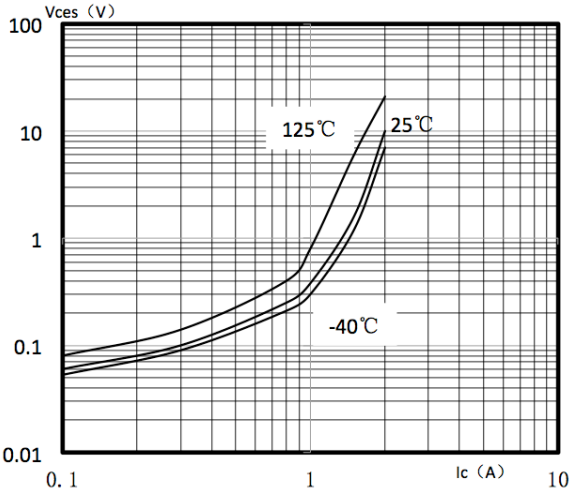


Figure 4. Vbe(sat) vs. IC



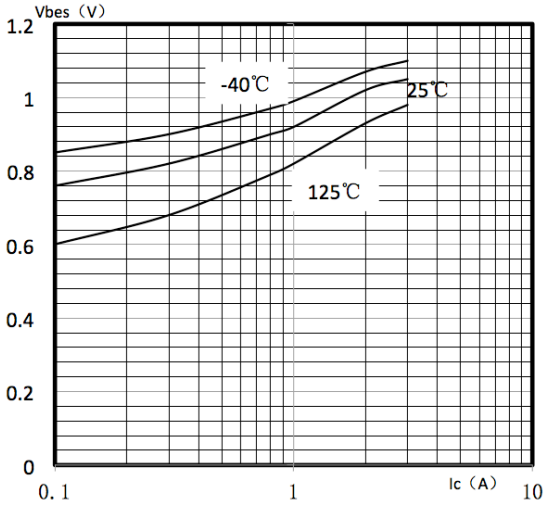


Figure 5. Power Derating

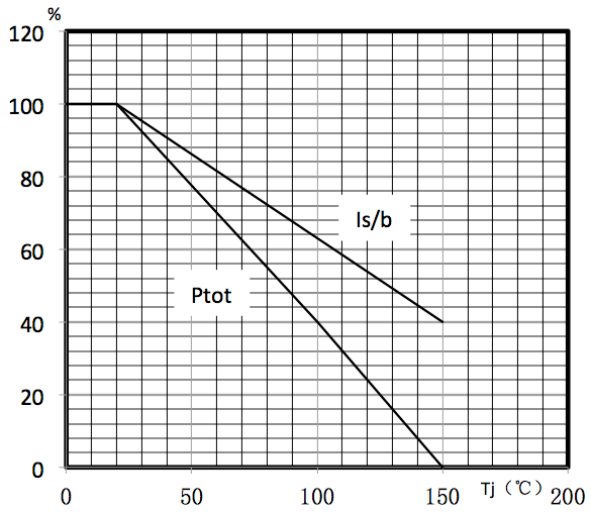


TO-92 Mechanical Drawing

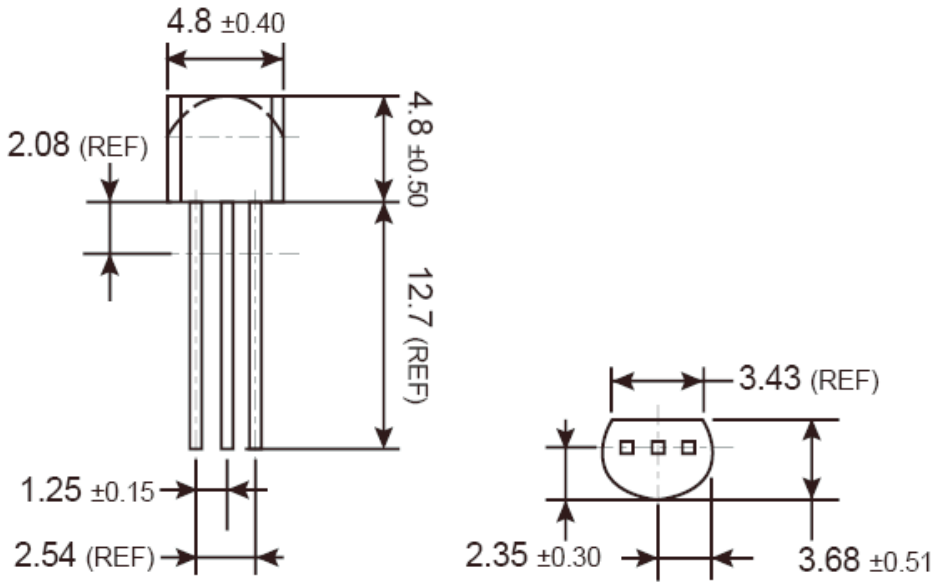


Unit: Millimeters

Marking Diagram



Y = Year Code
M = Month Code for Halogen Free Product
(**O**=Jan, **P**=Feb, **Q**=Mar, **R**=Apl, **S**=May, **T**=Jun, **U**=Jul, **V**=Aug, **W**=Sep, **X**=Oct, **Y**=Nov, **Z**=Dec)
L = Lot Code

TO-92 Ammo Pack Mechanical Drawing

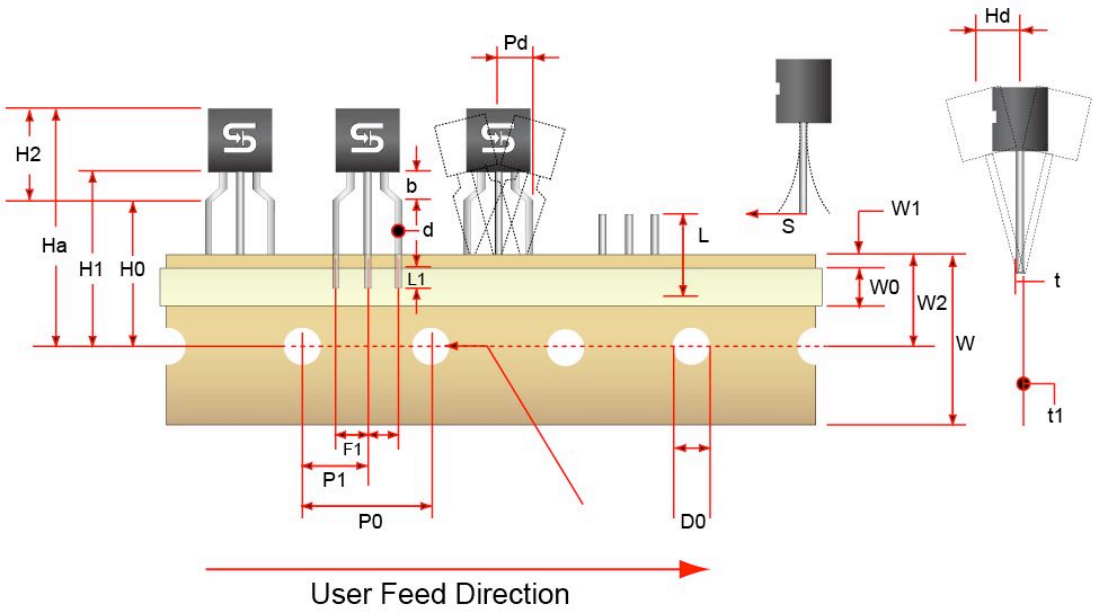

Tape Dimension

Item Description	Symbol	Dimension
Base of Package to Lead Bend	b	3.0 (typ.)
Component Height	Ha	23.57 (typ.)
Lead Clinch Height	H0	16.0 ±0.5
Component Base Height	H1	19.0 ±0.5
Component Top to Lead Bend	H2	8.0 (max)
Component Alignment (side / side)	Pd	1.02 (max)
Component Alignment (front / back)	Hd	0.79 (max)
Feed Hole Pitch	P0	12.7 ±0.3
Hole Center to Component Center	P1	6.25 ±0.4
Lead Spread	F1	2.5 ±0.3
Lead Thickness	d	0.46 (typ.)
Cut Lead Length	L	10.9 (max)
Taped Lead Length	L1	5.31 (typ.)
Taped Lead Thickness	t	0.81 ±0.2
Carrier Tape Thickness	t1	0.5 ±0.2
Carrier Tape Width	W	18.0 ±0.5
Hold – down Tape Width	W0	0.5 ±0.2
Hold – down Tape position	W1	9.0 ±0.7
Feed Hole Position	W2	6.0 ±0.2
Sprocket Hole Diameter	D0	4.0 ±0.2
Lead Spring Out	S	0.1 (max)

Note: All dimensions are in millimeter.

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.