



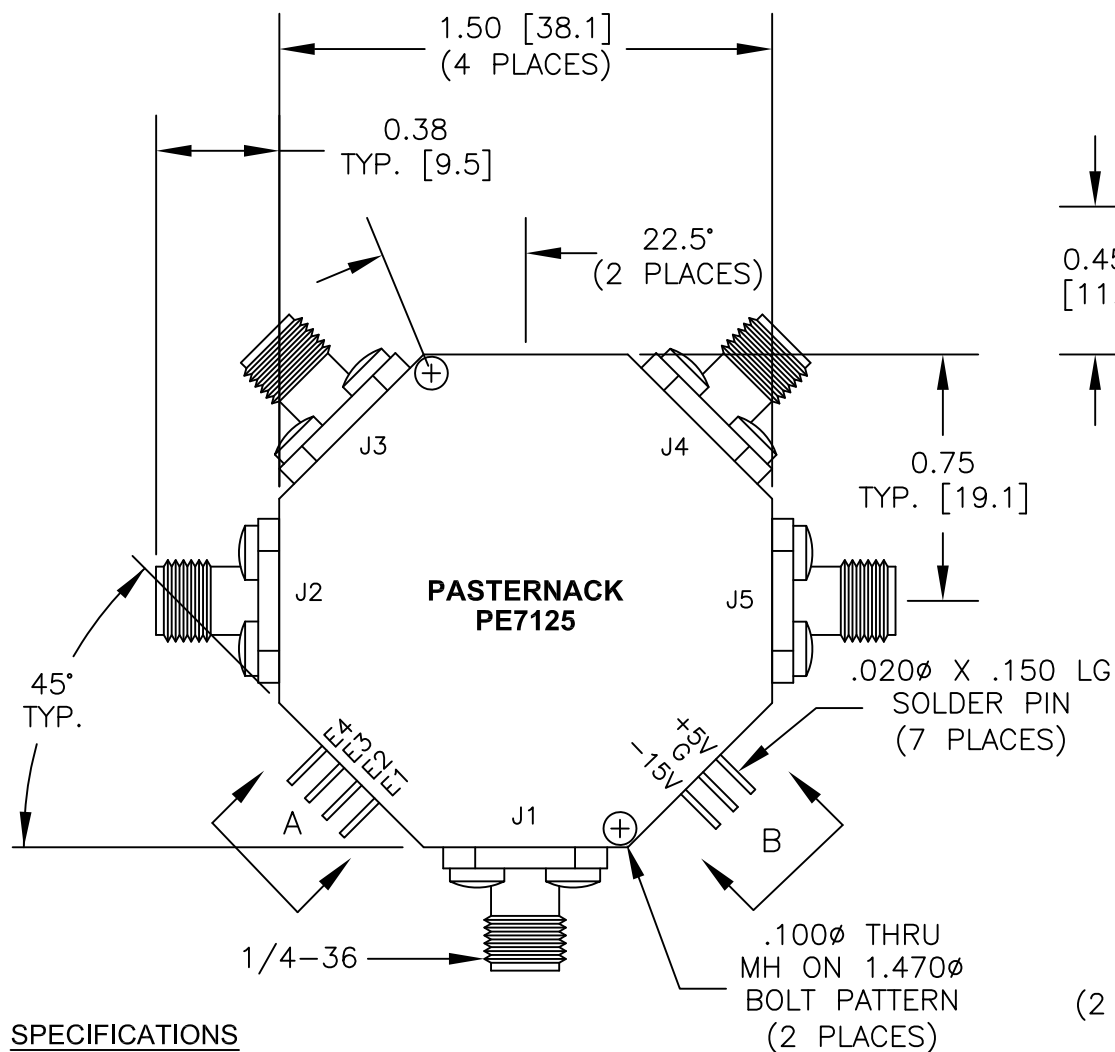

## SPECIFICATIONS

FREQUENCY RANGE: 10 MHz-1 GHz  
 DC BIAS: +5V±.5V @ 160mA MAXIMUM  
 -15V±3V @ 50mA MAXIMUM  
 INSERTION LOSS: 1.5 dB MAXIMUM  
 VSWR: 1.5:1 MAXIMUM  
 ISOLATION: 80 dB MINIMUM  
 SWITCHING SPEED: 250 nsec MAXIMUM  
 POWER WATTS: 1.0 MAXIMUM  
 SWITCH TYPE: SP4T  
 CONTROLS:

TTL LOGIC 0: LOW LOSS  
 TTL LOGIC 1: ISOLATION  
 E1 CONTROLS: J2-J1  
 E2 CONTROLS: J3-J1  
 E3 CONTROLS: J4-J1  
 E4 CONTROLS: J5-J1

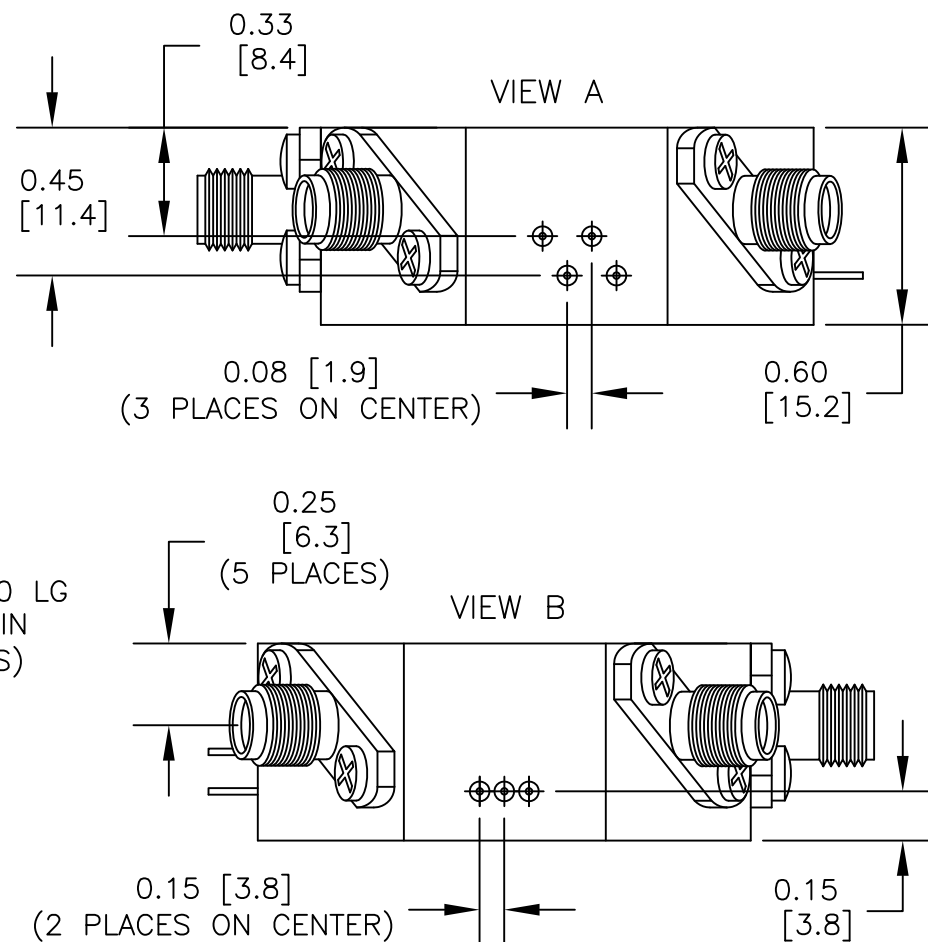

**PASTERNACK ENTERPRISES, INC.**

P.O. BOX 16759, IRVINE, CA 92623  
 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
 E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)

**COAXIAL & FIBER OPTICS**

DWG TITLE  
**PE7125**

DES. SMA FEMALE, COAXIAL SWITCH FREQUENCY  
 RANGE: 10 MHz TO 1 GHz SWITCH TYPE:  
 SP4T

|        |                |                 |           |        |      |
|--------|----------------|-----------------|-----------|--------|------|
| REV. B | FSCM NO. 53919 | CAD FILE 013112 | SCALE N/A | SIZE A | 2233 |
|--------|----------------|-----------------|-----------|--------|------|

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].