



NOTES:

Rated Current: 1.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40℃ to +105℃


Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK

Ordering Information

1315-22 XX XX S XXX C X XX

No. of Pins Contact Plating Pin Length Insulator Packing Series No.
 Per Row: 02-50 G0=Gold Flash L=A+B+C C=PA9T A=Tray 01-99
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin
 SM=Matte Tin

Item	Pin Length	A	B	C	Mating
Standard	--	1.80	1.90	--	2321
	--	1.80	3.00	--	2334
	--	1.80	4.00	--	2344
	6.90	1.60	2.30	3.00	
	15.50	1.80	1.90	11.80	

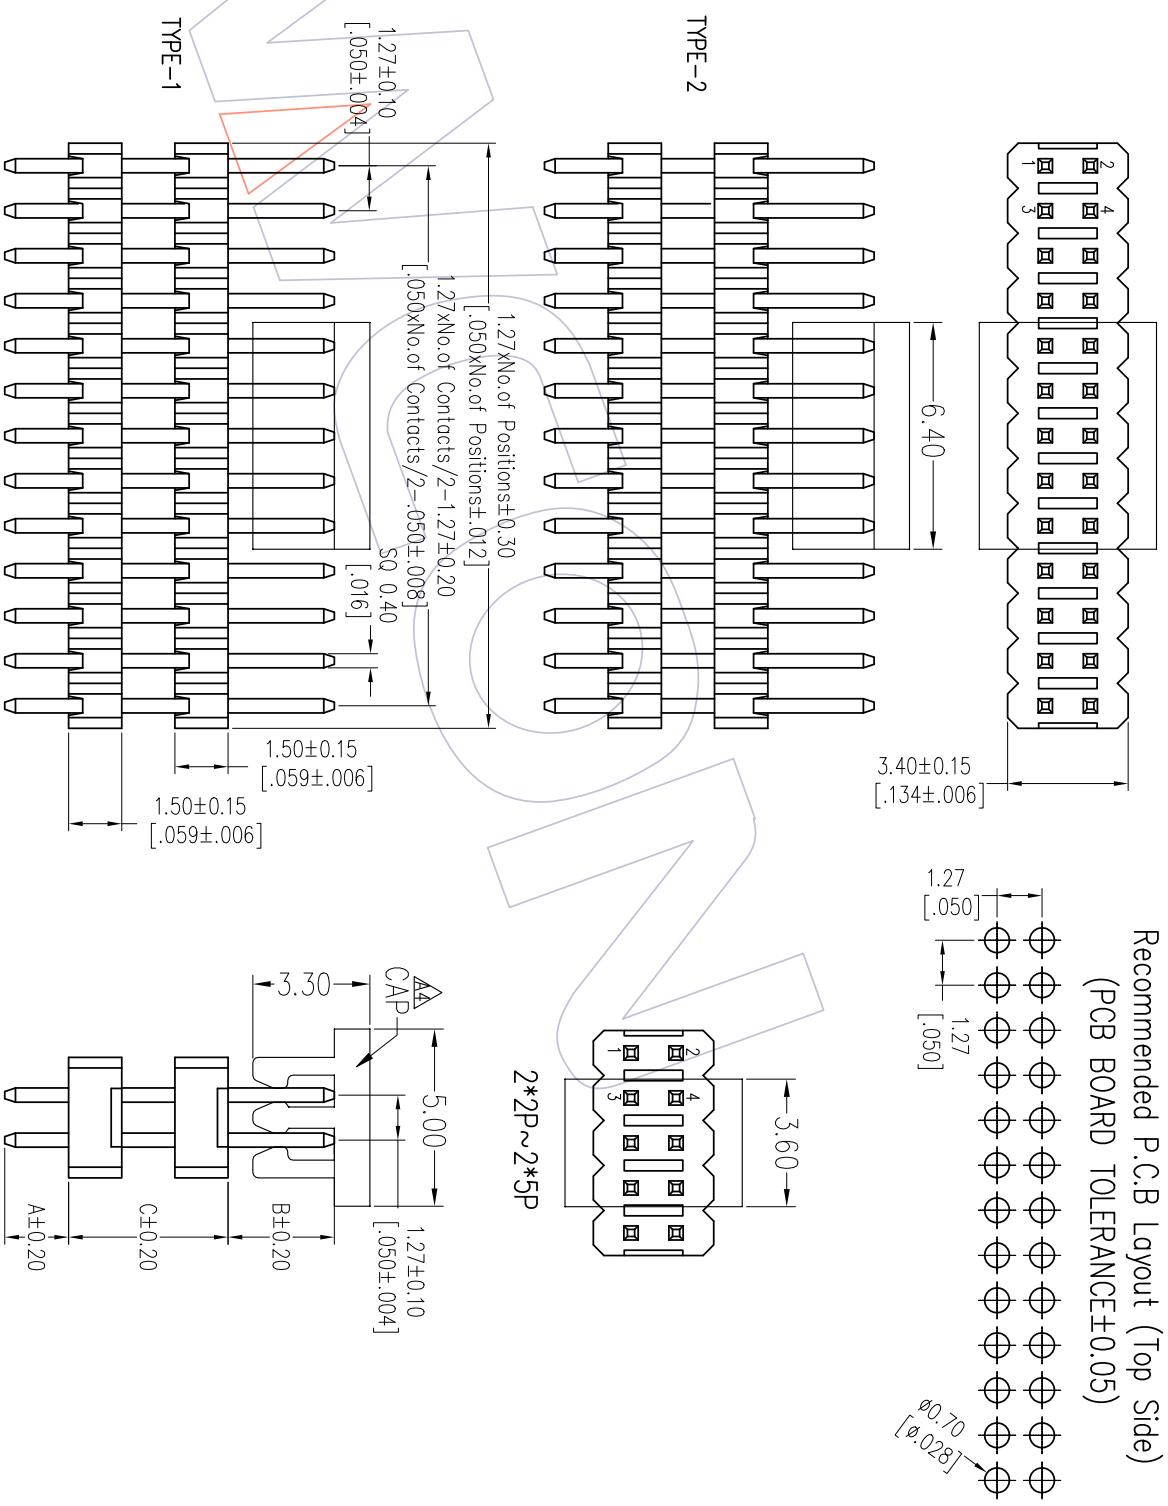

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DW	TOL	APPROVE	DATE	SCALE	Fit	PART NO.	TITLE:
A4	2021/01/19	ADD CAP	Du Ymg	OPERATION	DRAW	DATE	2021/01/19	SCALE	Fit	1315-22XXXXXXX	1.27 Pin Header, DUAL ROW, S/T, DOUBLE PLASTIC, H=1.5
A3	2019/02/14	MODIFY	Ding	XX	XX	DATE		UNIT	[mm]		
A2	2018/01/15	MODIFY PART NO.	William Chen	X.XX	±0.25	CHECK		SIZE	A4		
A0	2012/03/15	NEW		X.XXX	±0.15	CHECK		SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DW	TOL	APPROVE	DATE	PROJ.		Customer NO.	



WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com