
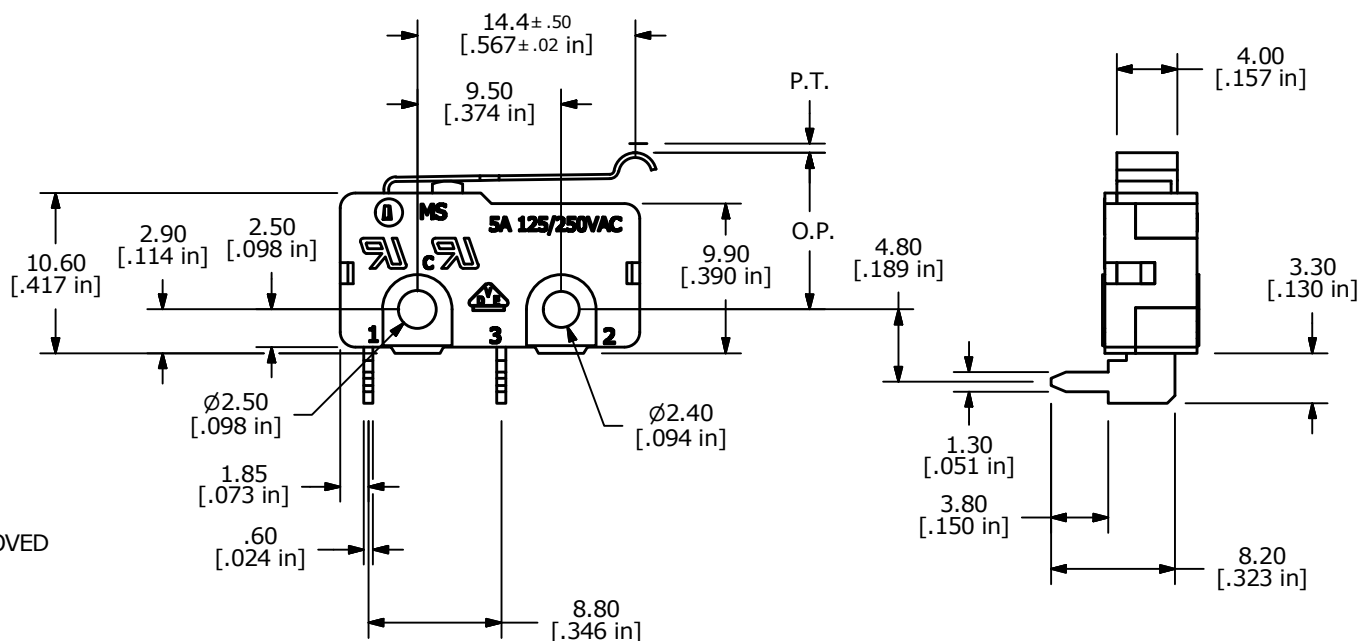


O.P. (MM)	P.T. (MM)
10.9±1.0	3.2 MAX.

O.P. = OPERATING POINT  
P.T. = PRE-TRAVEL



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4  
X.XX = ± 0.25
3. RATING: 5A @125/250VAC UL, CUL, VDE APPROVED
- ▲ 4. OPERATING FORCE: 75 ± 25 gf
5. OPERATING TEMP: -25°C to 85°C
6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: 100 MEGA-OHMS
9. DIELECTRIC STRENGTH: 1000VAC 1 MINUTE (INITIAL VALUE)
10. CONTACT RESISTANCE: 100 MILLI-OHMS MAX.
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2011/65/EU (ROHS) COMPLIANT
- ▲ 13. PACKAGE: TRAY, 270 PCS PER CASE/14 CASES PER BOX.



A	22580	RELEASED FOR PRODUCTION	11/8/16	MW
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE	MS0850504F075V2C			
SCALE	DATE	DR	DWG	REV

2:1	11/8/2016	MW	Q970162	A
-----	-----------	----	---------	---

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED